

KRISONS MARKETING



KRISONS MARKETING

Company Profile



About us

Krisons Marketing is a premier, proprietorship-led powerhouse in the industrial textile sector. With a legacy spanning over three decades, we have cemented our reputation as a trusted partner for businesses requiring high-performance non-woven and industrial fabrics.

Our business philosophy is built on three pillars:

- **Quality Assurance:** Rigorous, multi-stage testing to ensure every yard of fabric meets international standards.
- **Global Logistics:** A streamlined supply chain designed for punctual, "on-time" delivery across borders.
- **Client Centricity:** Fostering transparent, long-term relationships that go beyond a simple transaction.

Innovation & Leadership

We take pride in our role as **market pioneers**. Krisons Marketing was among the first to introduce **double-sided non-woven fabrics** specifically optimized for the home furnishing industry—a move that redefined durability and aesthetic versatility in the sector.

Why Partners Choose Us

- **Insight-Driven Development:** We don't just sell fabric; we listen to customer challenges and engineer solutions that address specific pain points.
- **Strategic Sourcing:** Our extensive network ensures a reliable flow of raw materials, insulating our clients from market volatility.
- **Unwavering Integrity:** As a proprietorship, our word is our bond. We operate with a level of personal accountability that ensures every project is handled with the utmost professional ethics.

KRISONS MARKETING



Chennai | Karur | Erode

Krisons Marketing's head office is located in the State Capital Chennai, Tamil Nadu. Right in the center of South India's Textile hub lies our branch office at Karur and factory at Erode.



Established - 1992

Starting in 1992 with hardware like buckles and D-rings for leather goods and apparel, we evolved into experts in woven/non-woven interlinings and advanced textiles.



2019 - Factory

After gaining over a few decades of experience, our factory was put up in the year 2019 equipped with the most modern machineries focusing on quality products



Woven, Non woven Interlining

Our manufacturing unit has the capability of producing Woven, Non woven and coated fabrics (Microdot, Paste Dot, Double Dot and Scatter coating).



2000000 metres / month

Along with advanced technology, our factory has the capability of producing 2 million metres of fabric per month



Applications

Thermal bond non-woven interlining is a “silent” component—you rarely see it, but you feel its effect in the structure of everyday items.

1. Apparel Manufacturing (Garment Construction)

This is the most common application. It is used to provide internal architecture to clothing.

- * *Front Fusing:* In mass-produced suits and coats, the entire front panel is bonded with thermal interlining to give the chest a smooth, structured appearance.
- * *Small Part Reinforcement:* Applied to collars, cuffs, pocket flaps, and waistbands to ensure they stay crisp after multiple washes.
- * *Stay Tapes:* Slit into narrow strips and applied to “bias” cuts (like necklines or armholes) to prevent the fabric from stretching out of shape during the sewing process.
- * *Blouse & Shirt Plackets:* Provides the necessary stiffness for buttonholes so they don’t tear or sag.

2. Technical & Industrial Applications

Outside of fashion, these fabrics are used for their filtration and barrier properties.

- * *Filtration Media:* Used in air conditioning filters, vacuum cleaner bags, and liquid filtration because the thermal bonding creates a consistent pore size.
 - * *Protective Clothing:* Used in the production of disposable lab coats, coveralls, and shoe covers for cleanroom environments.
 - * *Cable Wrapping:* In the electronics industry, it’s used as a binding tape to wrap wires, providing heat resistance and insulation.
-

Applications

3. Automotive Industry

Thermal bond non-wovens are prized here for being lightweight and sound-absorbent.

- * *Headliners*: Used as a backing for the fabric on the ceiling of cars.
- * *Trunk Liners*: Provides a durable, scuff-resistant surface for the interior of the trunk.
- * *Seat Construction*: Acts as a stabilizer between the foam and the outer upholstery to prevent the leather or fabric from wrinkling.

4. Home Textiles & Accessories

- * *Embroidery Stabilizers*: Applied to the back of fabric before stitching complex designs; “Tear-away” versions are often thermal-bonded non-wovens.
- * *Curtain Headers*: Inserted into the top of drapes to support heavy grommets or hooks.
- * *Quilt Batting*: Low-loft thermal bond webs are used inside quilts to provide warmth without the bulk of traditional cotton batting.
- * *Bedding*: Used in mattress covers and pillow protectors as a cost-effective structural layer.



Products

Thermal Bond Non Woven Fabric



Made up of recycled or virgin polyester



23 GSM - 80 GSM



100 cms to 200 cms width



White, Charcoal, Black, Off White & Optical White



Water permeable



Breathable



Polyester Paste Dot, Polyester Double Dot Polyamide Paste Dot, Polyamide Double Dot



Products

Microdot fusible interlining



Placket



Collar stand
interlining



Cuff



Main interlining




Seam/Armhole/
All the joint parts

Ladies Garment




Children's Garment



Quilt (Wadding Support)



Blazer

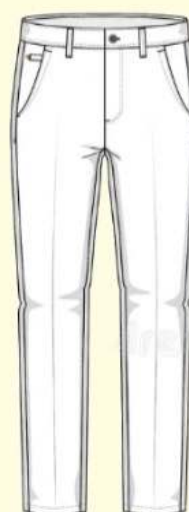

Belt band

Pocket Mouth



Belt loop



Products

Microdot fusible interlining

Article	GSM	Width (cms)	Colour	Coating Quality	Coating
5236	23	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5273	25	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5337	30	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5370	35	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5425	40	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5484	45	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5544	50	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5577	55	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5628	60	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5689	65	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5725	70	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5777	75	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot
5813	80	100/150/200	W/B/C	PES / PA	Paste Dot Double Dot

W – White (Semi-Dull; Optical); B – Black; C – Charcoal; PES – Polyester; PA – Polyamide

Fusing Procedure

Fusing thermal bond non-woven interlining requires a precise balance of three variables: **temperature**, **pressure**, and **time** (dwell time). Because non-woven interlinings are often heat-sensitive, following the correct parameters prevents "strike-back" (glue leaking through) or "strike-through" (glue seeping to the face of the fabric).

Pre-Fusing Preparation

- **Test Sample:** Always perform a test fuse on a scrap piece of your production fabric. Check for bond strength, fabric shrinkage, and any change in the fabric's "hand" (feel).
- **Alignment:** Place the resin-coated side (the rough or shiny dotted side) against the "wrong" side of the garment fabric.
- **Cleanliness:** Ensure the heat press or iron surface is clean to avoid transferring old adhesive to your project.

Standard Fusing Parameters

While specific settings vary by manufacturer and interlining weight, these are the industry-standard ranges:

Variables	Flat bed / Iron Press	Continuous Rotary Press
Temperature	120°C-150°C	120°C-150°C
Pressure	2-4 Kgs / cm ²	2-4 Bar
Time	12-17 Seconds	10-16 Seconds

Step-by-Step Procedure

1. **Pre-heat:** Set your equipment to the recommended temperature. If using a hand iron, use the **silk/wool setting** (usually no steam, as moisture can interfere with some thermal resins).
 2. **Positioning:** Lay the fabric flat on the pressing board, place the interlining on top, and cover with a **press cloth** or Teflon sheet to protect the iron and fabric.
 3. **Application:** * **Pressing:** Lower the heat press. If using an iron, **press down firmly** in one spot. Do not slide the iron, as this can shift the interlining and cause ghosting or wrinkles.
 - **Overlapping:** Lift the iron and move it to the next section, slightly overlapping the previous area to ensure no spots are missed.
 4. **Cooling (Crucial):** Allow the fused pieces to lay completely flat for at least **20–30 minutes**. The bond is only permanent once the resin has fully recrystallized at room temperature.
-

Company Profile


Name of the company	: Krisons Marketing
Constitution	: Proprietorship
Managing Partners	: K. Chandrasekaran
Head Office address	: E-5-239, AWHO, Parameswaran Vihar, #67, Arcot Road, Saligramam, Chennai - 600 093. Tamil Nadu, India
Branch Office address	: #16, Dindugul Road, Karur - 639 001 Tamil Nadu, India
Factory Address	: #17/1, Baladhandayutham 2nd Street, Konavaikkal, Railway Colony Post, ERODE - 638 002. INDIA
Established	: 1992
Type of Firm	: MSME
Activity	: Thermal Bond Non-woven fabric, Coated fabric manufacturing
Factory Location	: Urban (Erode Corporation)
Human Resources	: 35
Electricity	: 320 KVA HT Line
Boiler	: Electric boiler
Machineries	: Non-Woven fabric machine, Coating machine, Chilling Plant, Air Compressor, Transformer
Quality Control	: In-House Testing Laboratory
Production Capacity	: 2,000,000 metres / month
Factory Commencement	: December 2019
Product manufactured	: Non-woven interlining, Geo-textile fabric and multiple industrial application
Primary Market	: Bangalore, Chennai, Tirupur, Karur (INDIA)

Gallery



Contact us:

Location

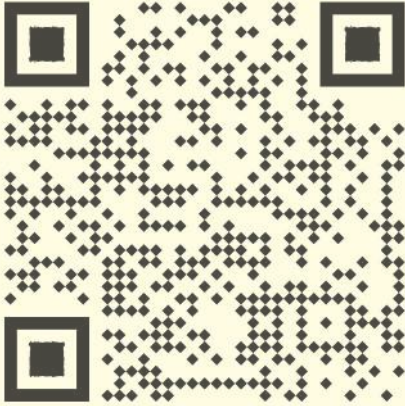

Contact

Mr. K. Chandrasekaran
Proprietor
+919840410346

Mr. R. Sridharan
Manager
+919842444109

Email: krisonsmarketing@gmail.com

Head Office:

Krisons Marketing
E-5-239, AWHO,
Parameswaran Vihar,
#67, Arcot Road, Saligramam,
Chennai - 600 093
Tamil Nadu, India

Branch Office:

Krisons Marketing
#16, Dindugul Road,
Karur - 639 001
Tamil Nadu, India

Factory:

Krisons Marketing
#17/1, Baladhandayutham
II Street, Konavaikkal,
Erode - 638 002
Tamil Nadu, India

