Yesha Enterprises

COMSYN TIGER

Always with the Farmers

: 71 Govind Sarang Parisar
New Rajendra Nagar, Raipur (C.G)
ZIP Code : 492001
: 9770403382,9977228924
: yeshaenterprises01@gmail.com
: www.yeshaenterprises.in

Yesha Enterprises

COMSYN TIGER
Always with the Farmers

HDPE GEOMEMBRANE

IS 15351:2015
(HDPE GEO MEMBRANE)
CML-8200007799

LANDFILL LINER

POND LINER

AQUACULTURE LINER

CANAL LINER

MINING LINER

SECONDARY CONTAINMENT LINER

Key Features

- Multi- Axial Reinforced film technology offers exceptionally high hydrostatic resistance.
- Prime Bond Coating technology which enhance product quality and offers High Tensile Strength, Tear strength and Seam Strength (Sealing Strength)
- Ease of welding at low temperatures.
  Special UV stabilizers and antioxidants designed use for an extended long time exposure water retention applications.
- Premium grade of carbon black is utilized to deliver superb UV resistance in exposed applications.
- Outstanding chemical resistance

Key Uses

- Agriculture
- Aquaculture
- Pond Liners
- Canal Liners
- Landscaping
- Mining & Energy
- Wastewater Lagoons

Technical Data

PROPERTY	TIGER 300	TIGER 500	TIGER 600
Product Weight (GSM)	250 GSM	420 GSM	500 GSM
Thickness (Micron)	300 Micron	500 Micron	600 Micron
Breaking Strength – MD (IS 13162 - Part 5)	4300 N	6600 N	8000 N
Breaking Strength – CD (IS 13162 - Part 5)	4000 N	6000 N	8000 N
Elongation @ Break – MD (IS 13162)	20 %	20%	20%
Elongation @ Break – CD (IS 13162)	20 %	20%	20%
Tear Strength – MD (IS 7016 - Part 3, Method A1)	150 N	250 N	400 N
Tear Strength – CD (IS 7016 - Part 3, Method A1)	150 N	350 N	400 N
Hydrostatic Resistance (Kg/Sq.cm)	No Leakage @ 10	No Leakage @ 15	No Leakage @ 20
UV Weathering (% after 2000 hours exposure)	>90%	>90%	>90%
Bursting Strength (IS 7016 - Part 6) – N/Sq.cm	60	110	120
Puncture Resistance (Annex D of IS 15351)	300 N	500 N	500 N
Warranty	3 Years	5 Years	5 Years

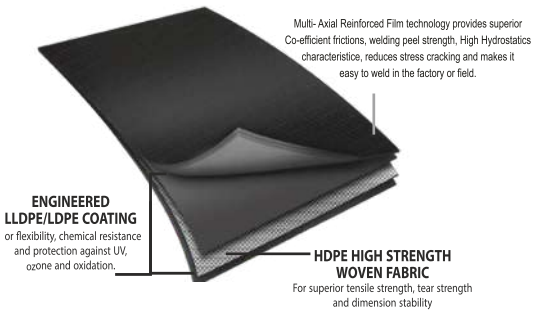

All values are ± 10%.
Test data in based on average taken from several production runs.
values are typical data and are not limiting specification.

: 9770403382,9977228924 : yeshaenterprises01@gmail.com : www.yeshaenterprises.in

Yesha Enterprises

COMSYN TIGER
Always with the Farmers

BIOFLOC TANK

Key Uses	GSM
• Fish Farming • Shrimp Farming	• 550 GSM • 650 GSM • 750 GSM

STRONG & DURABLE | UV STABILITY | HIGH TENSILE | WATER PROOF | EASY TO INSTALL | LIGHT WEIGHT & PORTABLE

PARAMETER	1 HP - 4 Nozzle
Voltage Range	230(Single Phase) / 420 (Three Phase)Volt
Frequency Range	50 Hz/ 60 Hz
Ampere Range	6 Amp(Single Phase)/1.8Amp(Three Phase)
Water Flow Range	35-40 feet
Oxygen Generation (kg/hr)	2.8 kg/hr
Power consumption (Unit / hr)	1.1 Unit
Installation depth in feet	9-11 feet

Nozzle Aerator

PARAMETER	2 HP - 8 Nozzle
Voltage Range	230(Single Phase) / 420 (Three Phase)Volt
Frequency Range	50 Hz/ 60 Hz
Ampere Range	11 Amp(Single Phase)/3.3Amp(Three Phase)
Water Flow Range	40-50 feet
Oxygen Generation (kg/hr)	3.8 kg/hr
Power consumption (Unit / hr)	1.7-1.9 Unit
Installation depth in feet	9-11 feet

: 9770403382,9977228924 : yeshaenterprises01@gmail.com : www.yeshaenterprises.in

Yesha Enterprises

COMSYN TIGER
Always with the Farmers

HDPE TARPAULIN

TRUCK TARP

FUMIGATION COVER

MACHINE

Technical Data

PROPERTY	TEST METHOD		Tiger 125	Tiger 175	Tiger 200	Tiger 250
Weight (GSM)	ASTM D 5261		125	175	200	250
Tensile Strength (N)	ASTM D751	MD	510	770	880	1160
		CD	441	666	850	900
Trapezoidal Tear (N, min)	ASTM D4533	MD	117.6	190	245	392
		CD	88.2	170	210	333.2
Puncture Resistance (N, min)	ASTM D4833		68.6	120	147	156.8
Bursting Strength Mullen Type (PSI)	ASTM D751		160	270	320	410
Low Temperature Flexibility	ASTM D 2136		-20°C	-20°C	-20°C	-20°C

All values are ± 10%.
Test data in based on average taken from several production runs.
values are typical data and are not limiting specification.

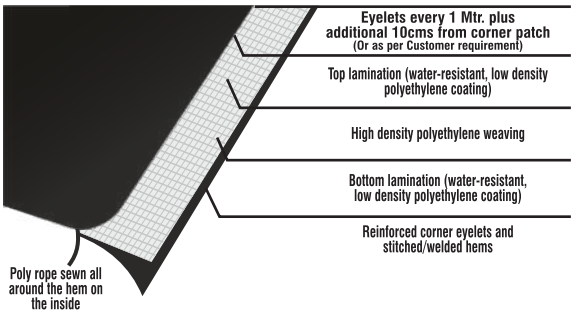

STRONG & DURABLE | UV STABILITY | HIGH TENSILE | WATER PROOF | EYELETS EVERY 1Mtr. OR AS PER CUSTOMER REQUIREMENT | LIGHT WEIGHT & FLEXIBLE

Sludge Pump

PARAMETER	2 HP AERATOR
Voltage Range	230(Single Phase) / 420 (Three Phase)Volt
Frequency Range	50 Hz/ 60 Hz
Ampere Range	11 Amp(Single Phase)/3.3Amp(Three Phase)
Water Flow Range	50-60 feet Head
Power consumption (Unit / hr)	1.5 Unit
Installation depth in feet	50-60 feet Head

Turbine Aerator

PARAMETER	1 HP Submersible model	2 Hp Induction Model
Voltage Range	230(Single Phase) / 420 (Three Phase)Volt	230(Single Phase) / 420 (Three Phase)Volt
Frequency Range	50 Hz/ 60 Hz	50 Hz/ 60 Hz
Ampere Range	6 Amp(Single Phase)/1.8Amp(Three Phase)	9.6 Amp(Single Phase) / 3.4 Amp (Three phase)
RPM of Turbine	2800 RPM	1440 RPM
Oxygen Generation (kg/hr)	2.5 kg/hr	3.5 kg/hr
Power consumption (Unit / hr)	1.1 Unit	2.2 Unit
Installation depth in feet	4 Feet from surface	2.5 feet from Surface

: 9770403382,9977228924 : yeshaenterprises01@gmail.com : www.yeshaenterprises.in

Yesha Enterprises

COMSYN TIGER
Always with the Farmers

JET AERATOR

PARAMETER	1 HP AERATOR	2 HP AERATOR
Voltage Range	230(Single Phase) / 420 (Three Phase)Volt	230(Single Phase) / 420 (Three Phase)Volt
Frequency Range	50 Hz/ 60 Hz	50 Hz/ 60 Hz
Ampere Range	6 Amp(Single Phase)/1.8Amp(Three Phase)	11 Amp(Single Phase)/3.3Amp(Three Phase)
Water Flow Range	60-75 feet	100-110 feet
Oxygen Generation (kg/hr)	3 kg/hr	3.8 kg/hr
Power consumption (Unit / hr)	1 Unit	1.5-1.8 Unit
Installation depth in feet	4 feet from surface level	5 feet from surface level

Micro-Nano Bubble Aerator

PARAMETER	1 HP AERATOR
Voltage Range	230(Single Phase) / 420 (Three Phase)Volt
Frequency Range	50 Hz/ 60 Hz
Air Flow	0.5 to 0.7 LPM
Water Flow Range	18-22 lpm outlet
Oxygen Generation (kg/hr)	Depeding of Pure O_2 Supply
Power consumption (Unit / hr)	1 Unit
Installation depth in feet	Outlet at any Depth

Roots Blowers & Vacuum Blowers

: 9770403382,9977228924 : yeshaenterprises01@gmail.com : www.yeshaenterprises.in

Yesha Enterprises

COMSYN TIGER
Always with the Farmers

USHA NEUROS SIDE CHANNEL BLOWER

WORKING PRINCIPLE

A **Side Channel Blower** transports air or gas by rotating an impeller through a close narrow fitted motor at high speed. The pressure in the channel is intensified by a turbulent stream in the radial channel. By using this method, the side channel blower is able to build a great differential pressure between inlet and outlet. The burden on the drive increases as the built-up pressure, depending on the system resistance, increases. An internal silencer allows the Usha Neuros Side Channel Blowers to run very quietly.

- **FLOW RATES : 5 - 2500 m3/hr**
- **PRESSURE RANGE : 100 - 1040 mbar**
- **VACUUM RANGE : 100 - 740 mbar**

USHA NEUROS CENTRIFUGAL BLOWER

WORKING PRINCIPLE

A **Centrifugal Blower** use the kinetic energy of the impeller to move the air stream, which in turn moves against the resistance caused by ducts, dampers and other components. When the impeller rotate, the air particles near the impeller are thrown off from the impeller, after that air moves into the fan casing and then the air is guided to the exit via outlet ducts. Centrifugal fans displace air radially, changing the direction (typicall by 90^0) of the airflow. They are sturdy, quiet, reliable, and capable of operation over a wide range of conditions.

- **FLOW RATES : 75 - 8000 m3/hr**
- **PRESSURE RANGE : 0.7 - 13 kPA**
- **VACUUM RANGE : 0.7 - 13 kPA**

IS 15907:2010

(HDPE VERMI BED)
CML-8200101286

HDPE VERMIBED

Key Uses

- Vermicomposting
- Organic Farming
- Dairy Farms & Gaushalas
- Agriculture Universities & Training Centers
- Nurseries & Horticulture Units

STRONG & DURABLE | UV STABILITY | HIGH TENSILE | WATER PROOF | EASY TO INSTALL | LIGHT WEIGHT & PROTABLE

: 9770403382,9977228924 : yeshaenterprises01@gmail.com : www.yeshaenterprises.in