

BoldFelt Baffles combine a time-tested texture with exceptional sound absorption capabilities and a full palette of shapes, sizes, and colors in a ceiling product geared for occupant comfort. BoldFelt Baffles have a clean look edge to edge, allowing for colors to be mixed and matched to create multiple design options or add movement to the ceiling.

Our Felt portfolio offers a wide range of solutions from linear systems and large-format panels to clouds and open cell, all constructed with high recycled content. Felt is a versatile acoustical material that is soft to the touch, kind to the ears, and easy on the eyes.

FEATURES AND BENEFITS

- Fully-engineered product delivered to site ready for installation
- Surface can be washed and disinfected¹
- NRC up to 1.10
- Maximum panels sizes:
 - Up to 12" x 95" (nom. 30.5 cm x 241 cm)
 - Thickness 1.5" and 2.75"
 - Other sizes and dimensions may be available, contact your sales representative for more information
- Available in 14 colors and 4 wood patterns

ATTRIBUTES



FIRE RATING:
CLASS A
PER ASTM E84
AND CAN/ULC-S102



WASHABLE



CUSTOMIZATION
AVAILABLE

LEED® v4

RECYCLED CONTENT	up to 55%
------------------	-----------

- ✓ MR: Recycled Content
- ✓ EQ: Low Emitting Materials
- ✓ EQ: Acoustic Performance

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS



HPD AVAILABLE



RED LIST FREE
AVAILABLE


¹ Not recommended for daily cleaning.



BOLDFELT BAFFLES

A wide range of colors and wood patterns are available. Note: Colors are for illustration purposes only.

COLORS

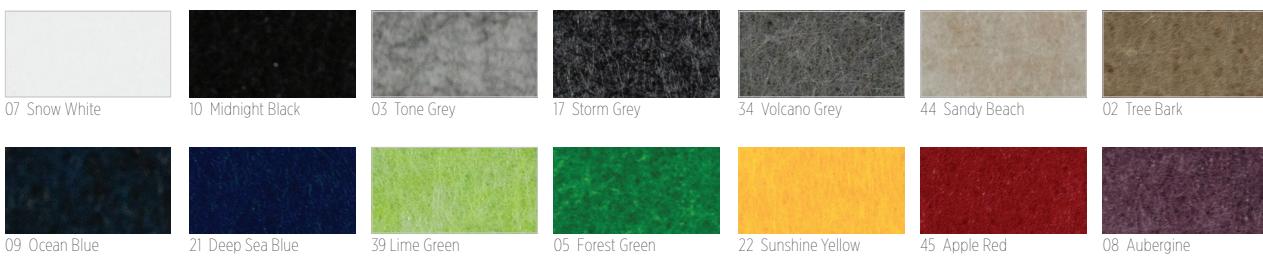


WOOD PATTERNS



INSTALLATION EXAMPLES


Typical Isometric

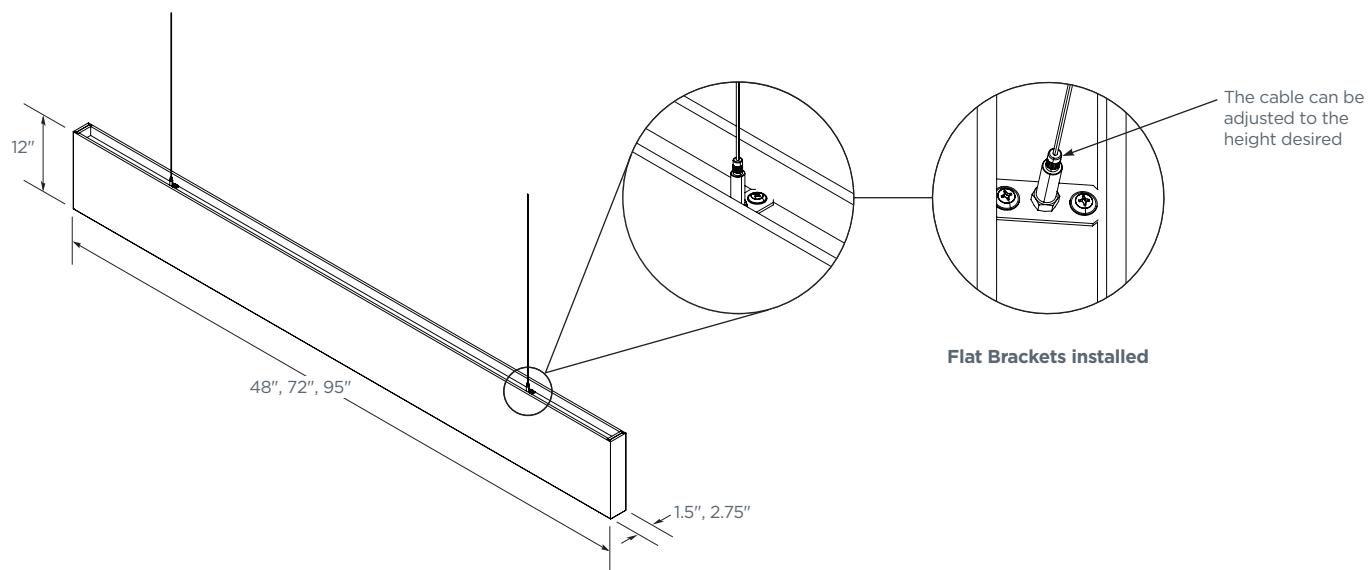

BOLDFELT BAFFLES

INSTALLATION EXAMPLES

Typical Section

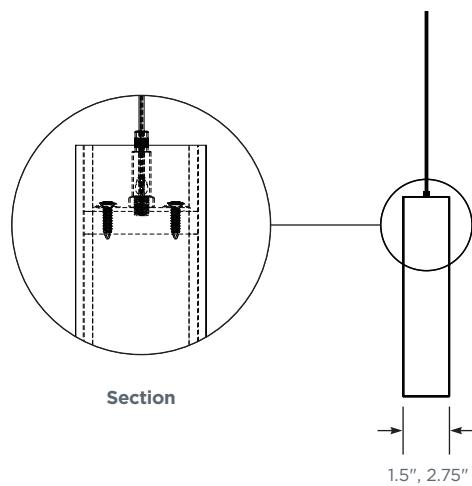

ACOUSTICAL PERFORMANCE

Acoustics

Frequency (Hz)	250	500	1K	2K	NRC
Noise Absorption	0.57	0.90	1.36	1.61	1.10
Sabins per m ²	4.45	7.05	10.62	12.61	

Acoustical tests performed in accordance with ASTM C423 and ASTM E795 standards.
Test reports available upon request.



PHYSICAL DATA

MATERIAL

100% PET Felt

WEIGHT

Varies nom. 0.85 lbs./linear ft.

FIRE RATING

Class A Fire Rated per ASTM E84
CAN/ULC-S102: FSR=15, SDC=245

RECYCLED CONTENT

Up to 55%

WARRANTY

2-year Warranty.
Full warranty information can be found at certainteed.com/warranty



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural

© 04/23 CertainTeed, Printed in the USA, Code No. 12-11-1938-US-EN