


9/16" EZ STAB BOLT SLOT SYSTEM - 1/4" REVEAL

CEILINGS & WALLS ACOUSTICAL SUSPENSION SYSTEMS

MAIN RUNNER



CROSS TEE

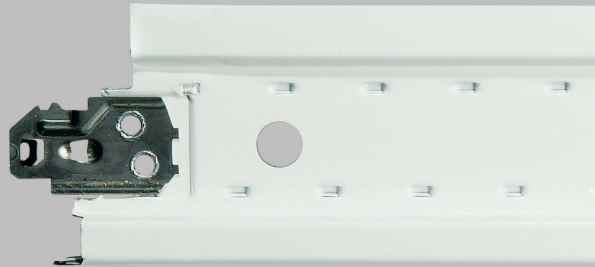

9/16" WALL ANGLE



7/8" WALL ANGLE




The EZ Stab Bolt Slot System provides increased strength and stability for easier ceiling grid installation.


FEATURES AND BENEFITS

- Narrow 9/16" face features a 1/4" center regress and is compatible with many narrow reveal edge panels
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Double-stitched web design for lasting durability and strength
- Mitered design on cross tee and main runner intersections produces a clean, continuous slot with multiple lengths and miter spacing to accommodate many module sizes
- Grid features G30 hot-dipped galvanized steel construction that is fully painted for corrosion resistance
- Intermediate- and heavy-duty certified profiles available to satisfy all seismic applications
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Available in Standard White. Additional color options are offered through our Post-Paint process. See the Visual Options - Suspension Systems page for color option details.


MAIN RUNNER



WALL ANGLE

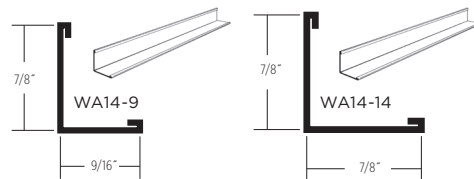

SHADOW MOLDING

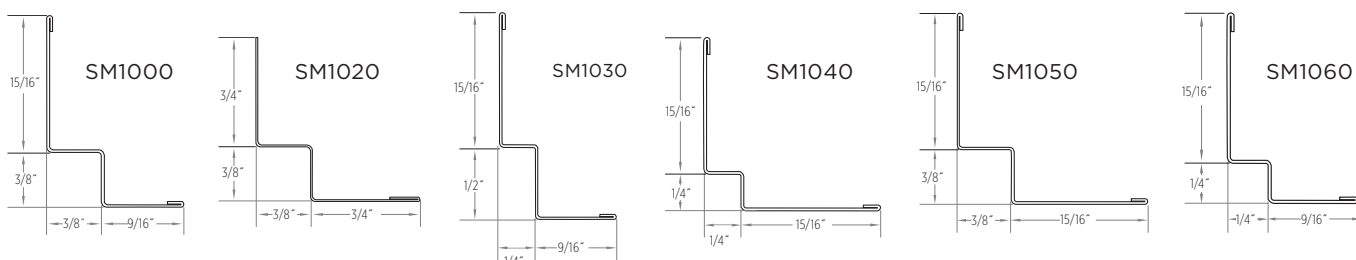

LEED® v4

RECYCLED CONTENT

up to 86%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ EQ: Low-Emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declaration (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE



HPD AVAILABLE

DeclareSM
Living Building Challenge Red List Free®


ARCHITECTURAL

CertainTeed
SAINT-GOBAIN


9/16" EZ STAB BOLT SLOT SYSTEM - 1/4" REVEAL

CATALOG NUMBER BREAKDOWNS

MAIN RUNNER

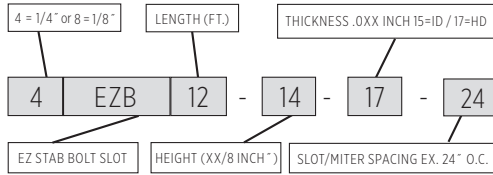

CROSS TEE

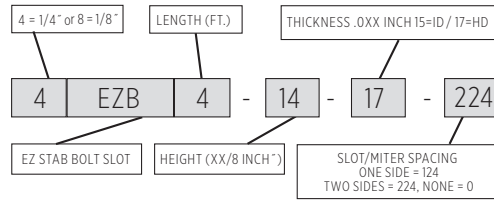

	GRID FACE (IN.)	DIMENSIONS (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
MAIN RUNNERS												
4EZB12-14-17-24	9/16	144 x 1-3/4 x 9/16	24 O.C.	20	240	A-F	HD	9%	77%	86%	16.2	40.5
4EZB12-14-17-48	9/16	144 x 1-3/4 x 9/16	48 O.C.	20	240	A-F	HD	9%	77%	86%	16.2	40.5
4EZB12-14-15-24	9/16	144 x 1-3/4 x 9/16	24 O.C.	20	240	A-C	ID	9%	77%	86%	14.2	35.5
4EZB12-14-15-48	9/16	144 x 1-3/4 x 9/16	48 O.C.	20	240	A-C	ID	9%	77%	86%	14.2	35.5
4EZB10-14-17-20	9/16	120 x 1-3/4 x 9/16	20 O.C.	20	200	A-F	HD	9%	77%	86%	16.2	40.5
4EZB10-14-17-30	9/16	120 x 1-3/4 x 9/16	30 O.C.	20	200	A-F	HD	9%	77%	86%	16.2	40.5
4EZB10-14-15-20	9/16	120 x 1-3/4 x 9/16	20 O.C.	20	200	A-C	ID	9%	77%	86%	14.2	35.5
4EZB10-14-15-30	9/16	120 x 1-3/4 x 9/16	30 O.C.	20	200	A-C	ID	9%	77%	86%	14.2	35.5
CROSS TEE												
4EZB0.33-14-15-0	9/16	4 x 1-3/4 x 9/16	—	50	16	—	—	9%	77%	86%	—	—
4EZB0.5-14-15-0	9/16	6 x 1-3/4 x 9/16	—	50	25	—	—	9%	77%	86%	—	—
4EZB1.7-14-15-0	9/16	20 x 1-3/4 x 9/16	—	50	83	—	—	9%	77%	86%	114.4	95.3
4EZB2-14-17-0	9/16	24 x 1-3/4 x 9/16	—	50	100	—	HD	9%	77%	86%	103.0	103.0
4EZB2-14-15-0	9/16	24 x 1-3/4 x 9/16	—	50	100	—	—	9%	77%	86%	81.3	81.3
4EZB2.5-14-15-0	9/16	30 x 1-3/4 x 9/16	—	50	125	—	—	9%	77%	86%	51.5	64.4
4EZB4-14-15-0	9/16	48 x 1-3/4 x 9/16	—	50	200	—	—	9%	77%	86%	4.2	35.5
4EZB4-14-15-224	9/16	48 x 1-3/4 x 9/16	24 O.C. (both sides)	50	200	—	—	9%	77%	86%	14.2	35.5
4EZB4-14-15-124	9/16	48 x 1-3/4 x 9/16	24 O.C. (one side only)	50	200	—	—	9%	77%	86%	14.2	35.5
4EZB4-14-17-0	9/16	48 x 1-3/4 x 9/16	—	50	200	—	HD	9%	77%	86%	16.2	40.5
4EZB4-14-17-224	9/16	48 x 1-3/4 x 9/16	24 O.C. (both sides)	50	200	—	HD	9%	77%	86%	16.2	40.5
4EZB4-14-17-124	9/16	48 x 1-3/4 x 9/16	24 O.C. (one side only)	50	200	—	HD	9%	77%	86%	16.2	40.5
4EZB5-14-15-0	9/16	60 x 1-3/4 x 9/16	—	50	250	—	—	9%	77%	86%	7.5	23.4
4EZB5-14-15-230	9/16	60 x 1-3/4 x 9/16	30 O.C. (both sides)	50	250	—	—	9%	77%	86%	7.5	23.4
4EZB5-14-15-220	9/16	60 x 1-3/4 x 9/16	20, 40 O.C. (both sides)	50	250	—	—	9%	77%	86%	7.5	23.4
4EZB5-14-15-120	9/16	60 x 1-3/4 x 9/16	20, 40 O.C. (one side only)	50	250	—	—	9%	77%	86%	7.5	23.4
4EZB6-14-15-0	9/16	72x1-3/4x9/16	—	20	120	—	—	9%	77%	86%	4.8	18
4EZB8-14-15-0	9/16	84x1-3/4x9/16	—	20	160	—	—	9%	77%	86%	2.1	7.9
WALL ANGLE												
WA14-9	9/16	144 x 7/8 x 9/16	—	40	480	—	—	19%	69%	88%	—	—
WA32-32	2	120 x 2 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-32-12	2	144 x 2 x 2	—	20	240	—	—	19%	69%	88%	—	—
WA32-15	2	120 x 15/16 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-15-12	2	144 x 15/16 x 2	—	20	240	—	—	19%	69%	88%	—	—
FLEXIBLE WALL ANGLE*												
FWA14-9	9/16	96 x 1-1/8 x 9/16	—	63	504	—	—	19%	69%	88%	—	—
FWA14-14	7/8	96 x 1-1/8 x 7/8	—	63	504	—	—	19%	69%	88%	—	—
SHADOW MOLDING												
SM1000	—	120 x 15/16 x 3/8 x 3/8 x 9/16	—	40	400	—	—	19%	69%	88%	—	—
SM1020†	—	120 x 3/4 x 3/8 x 3/8 x 3/4	—	40	400	—	—	19%	69%	88%	—	—
SM1030	—	120 x 15/16 x 1/2 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—
SM1040	—	120 x 15/16 x 1/4 x 1/4 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1050	—	120 x 15/16 x 3/8 x 3/8 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1060	—	120 x 15/16 x 1/4 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—

*Flexible Wall Angle is made of Rigid PVC

†SM1020 is not hemmed along 3/4" side

*Maximum recycled content percentage. Recycled content varies by manufacturing location.

**Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

Use Standard 9/16" Wall Angle and Shadow Molding

Flex Wall Angle will fit a 5-1/2" radius or larger









9/16" EZ STAB BOLT SLOT SYSTEM - 1/4" REVEAL

MAXIMUM FIXTURE WEIGHT

ITEM NUMBER	CONFIGURATION A B	FIXTURE A B	HANGER SPACING A B	MAXIMUM WEIGHT A B
Main Runner to Main Runner – Drawing Key: Main Runner (I) Cross tee (---) Hanger wire (+)				
4EZB4-14-15		24" x 48"	48"	56.00 lbs.
4EZB4-14-17		24" x 48"	48"	56.00 lbs.
4EZB4-14-15		24" x 48"	48"	56.00 lbs.
4EZB4-14-17		24" x 48"	48"	56.00 lbs.
4EZB4-14-15		24" x 24"	48"	40.00 lbs.
4EZB4-14-17		24" x 24"	48"	46.00 lbs.

Cross tees tested as follows: 4EZB4-14-15-0, -224, -124 tested at 14.2 lbs/LF to 1/360 of 4' span; 4EZB4-14-17-0, -224, -124 tested to 16.2 lbs/LF to 1/360 of 4' span.

ACCESSORIES

		ITEM NUMBER	PRODUCT NAME	DIMENSIONS L" X W" X H" (MM)	COLOR	PIECES/ CARTON	LBS./ CARTON
SEISMIC		CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
		CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
		SLEEVE 1/4	1/4" Bolt Slot Seismic Sleeve	3 x 9/16 x 5/16 (76.2 x 14.3 x 7.9)	White	100	1
STANDARD		BSNC14	1/4" Bolt Slot Notch Cover – White notch cover for 1/4" EZ Stab Bolt Slot Systems	1-1/5 x 3/16 x 11/32 (38 x 5 x 10)	White	100	1
		HW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
		SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9
		IC-9	9/16" Inside Corner	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10
		OC-9	9/16" Outside Corner	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10

PHYSICAL DATA

CROSS TEE/MAIN RUNNER MATERIAL

Fully painted and hot dipped galvanized steel (G30)

FACE DIMENSION

9/16"

CROSS TEE/MAIN RUNNER INTERFACE

Mitered

DUTY CLASSIFICATION

Heavy duty and Intermediate duty per ASTM C635

CROSS TEE/MAIN RUNNER SURFACE FINISH

Fully Painted

PROFILE HEIGHT

1-3/4"

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

END DETAIL

Main Runner: Integral Stab
Cross Tee: Staked-on Stab Clip

SEISMIC CATEGORY

A, B, C, D, E, F

WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed Ceiling Panels. Full warranty information can be found at certainteed.com/warranty.

SEISMIC PERFORMANCE

MAIN RUNNERS:

All main runners

MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

CROSS TEES:

All cross tees

ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed Ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to certainteed.com/architectural for current reports.


9/16" EZ STAB BOLT SLOT SYSTEM - 1/4" REVEAL

VISUAL OPTIONS — SUSPENSION SYSTEMS


ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.


CERTAINTEED STANDARD

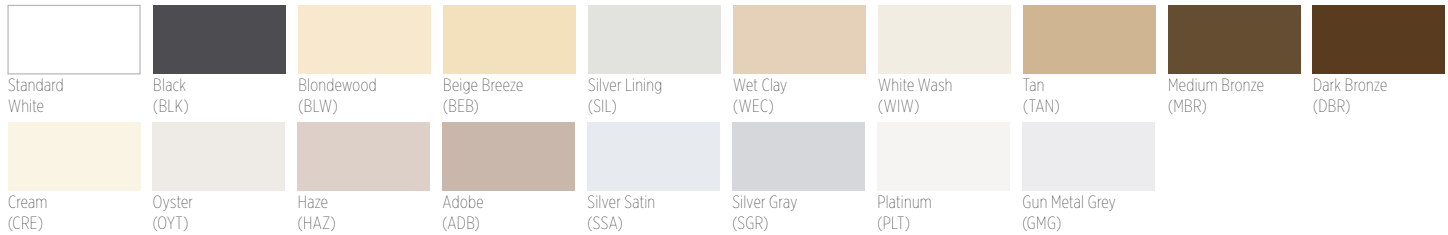

ECOPHON®

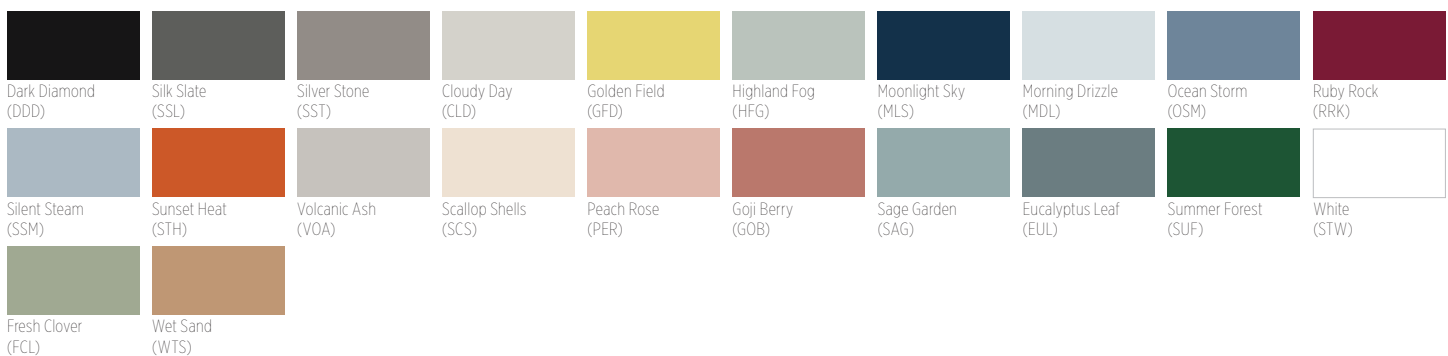

METAL CEILINGS



For Special color options, contact your local sales representative.


The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.

When placing an order for either Standard or Special colors, please use the following naming process proceeding each catalog code:

Standard face paint: ST + 3-letter color code
Standard 360 paint: 3T + 3-letter color code
Special face page: SP + 3-letter color code
Special 360 paint: 3P + 3-letter color code

Example:
EZCS4-12-12 ST WEC

Example: EZCS4-12-12 ST WEC

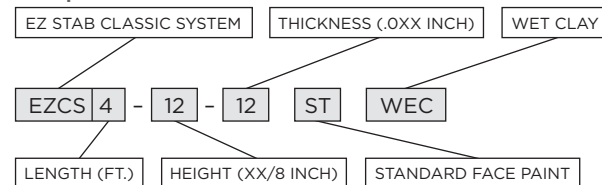

CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural