


# 15/16" EZ STAB CLASSIC ALL-ALUMINUM SYSTEM

## CEILINGS & WALLS ACOUSTICAL SUSPENSION SYSTEMS


MAIN RUNNER



CROSS TEE

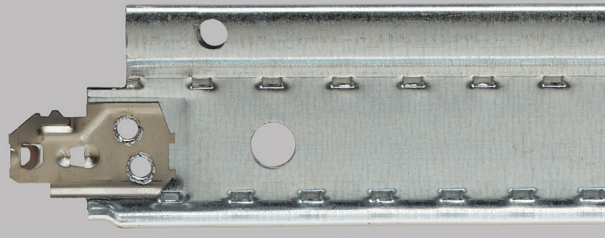

7/8" WALL ANGLE




The EZ Stab Classic All-Aluminum System is ideal for non-ferrous applications and high-humidity environments.


### FEATURES AND BENEFITS

- The All-Aluminum System offers solutions for 2'x2' and 2'x4' modules
- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Enhanced stitching increases stiffness, reducing bending or twisting
- Rolled Aluminum profile offers superior protection from corrosive and/or high-humidity applications
- Non-ferrous construction enables use in MRI suites

MAIN RUNNER



WALL ANGLE



### LEED® v4

#### RECYCLED CONTENT

up to 99%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ EQ: Low-Emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declaration (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

### CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE



HPD AVAILABLE

**Declare<sup>SM</sup>**  
Living Building Challenge Red List Free<sup>®</sup>

ARCHITECTURAL

**CertainTeed**  
SAINT-GOBAIN

# 15/16" EZ STAB CLASSIC ALL-ALUMINUM SYSTEM

	GRID FACE (IN.)	DIMENSIONS (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
<b>MAIN RUNNER</b>												
EZAL12-12-23	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	—	LD	—	—	99%	6.86	18.9
<b>CROSS TEE</b>												
EZAL2-12-23	15/16	24 x 1-1/2 x 15/16	—	60	120	—	—	—	—	99%	43.35	59.8
EZAL4-12-23	15/16	48 x 1-1/2 x 15/16	12 O.C.	60	240	—	—	—	—	99%	6.86	18.9
<b>WALL ANGLE - ALUMINUM</b>												
WA14-14SAL	7/8	144 x 7/8 x 7/8	—	40	480	—	—	9%	44%	53%	—	—
<b>FLEX WALL ANGLE</b>												
FWA14-14	7/8	96 x 1-1/8 x 7/8	—	63	540	—	—	—	—	—	—	—
FWA14-9	9/16	96 x 1-1/8 x 9/16	—	63	540	—	—	—	—	—	—	—

\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

## ACCESSORIES

	ITEM NUMBER	PRODUCT NAME	DIMENSIONS L" X W" X H" (MM)	COLOR	PIECES/CARTON	LBS./CARTON
STANDARD	PAHD	Plastic Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	200	1
	SSHW12	Stainless Steel 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
	EZSLOTTER	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5

## PHYSICAL DATA

### MATERIAL

Rolled Aluminum

### FACE DIMENSION

15/16"

### CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

### DUTY CLASSIFICATION

Light duty per ASTM C635

### CROSS TEE/MAIN RUNNER

#### SURFACE FINISH

Painted Aluminum Cap

### PROFILE HEIGHT

1-1/2"

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

### END DETAIL

Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

### WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed Ceiling Panels. Full warranty information can be found at [certainteed.com/warranty](http://certainteed.com/warranty).

## MECHANICAL PERFORMANCE

### MAIN RUNNER MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

### CROSS TEE MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 LBS.\*

\*Requires the use of a single aluminum rivet through the cross tee clip

## ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com/architectural](http://certainteed.com/architectural) for current reports.


# 15/16" EZ STAB CLASSIC ALL-ALUMINUM SYSTEM

## VISUAL OPTIONS — SUSPENSION SYSTEMS


### ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.


#### CERTAINTEED STANDARD

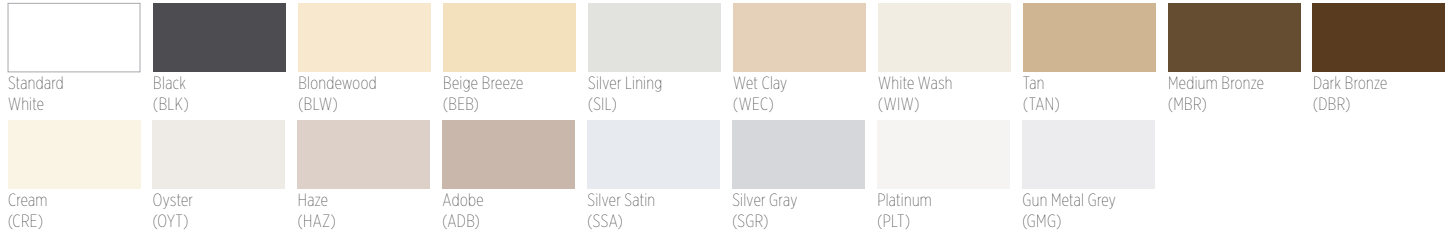

#### ECOPHON®

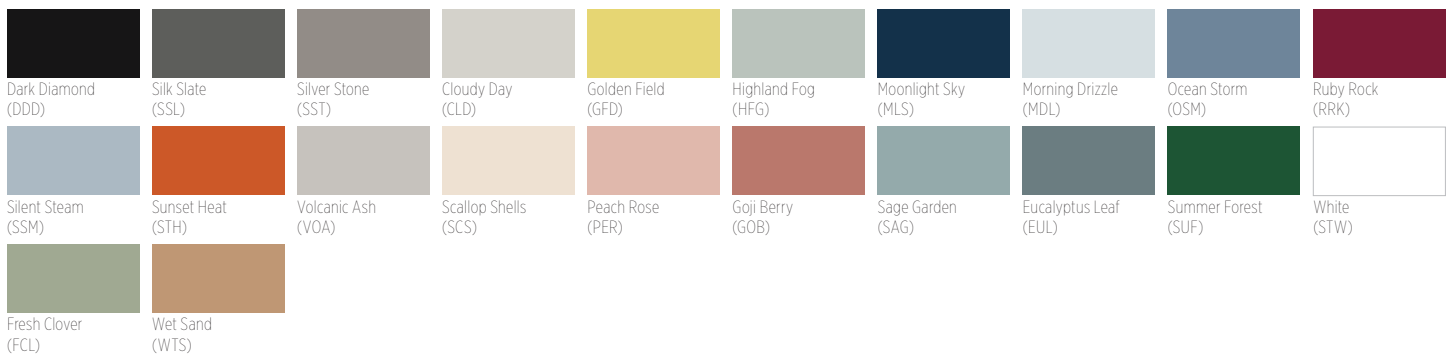

#### METAL CEILING



For Special color options, contact your local sales representative.


The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.

When placing an order for either Standard or Special colors, please use the following naming process proceeding each catalog code:

Standard face paint: ST + 3-letter color code  
 Standard 360 paint: 3T + 3-letter color code  
 Special face page: SP + 3-letter color code  
 Special 360 paint: 3P + 3-letter color code

**Example:**  
 EZCS4-12-12 ST WEC

#### Example: EZCS4-12-12 ST WEC

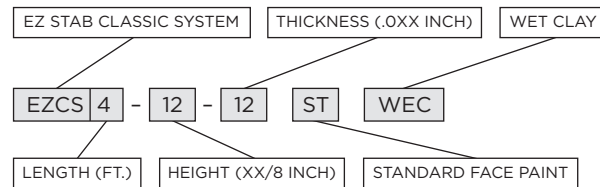

#### CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS  
 20 Moores Road, Malvern, PA 19355 800-366-4327 [certainteed.com/architectural](http://certainteed.com/architectural)