

ExpressionsFelt combines a time-tested texture with exceptional sound absorption capabilities and full palette of size, formats, colors and patterns in a product geared for occupant comfort. The free-hanging felt screens can be perforated with our own patterns or can be customizable to generate movement and multiple design options.

Our Felt portfolio goes from linear systems and large-format panels to clouds and open cell, all constructed with high recycled content. Felt is a versatile material that's soft to the touch, kind to the ears, and easy on the eyes.

FEATURES AND BENEFITS

- Product delivered to site ready for installation
- Surface can be washed and disinfected¹
- NRC up to 0.75
- Maximum panels sizes:
 - 48" x 96" (nom. 122cm x 243cm)
 - Thickness 0.35"
- Available in 14 colors and 4 wood patterns

ATTRIBUTES



FIRE RATING:
CLASS A
PER ASTM E84
AND CAN/ULC-S102



WASHABLE



CUSTOMIZATION
AVAILABLE

¹ Not recommended for daily cleaning.

LEED® v4

| | |
|------------------|-----------|
| RECYCLED CONTENT | up to 55% |
|------------------|-----------|

- ✓ MR: Recycled Content
- ✓ EQ: Low Emitting Materials
- ✓ EQ: Acoustic Performance

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS



HPD AVAILABLE




RED LIST FREE
AVAILABLE



EXPRESSIONSFELT

A wide range of colors and wood patterns are available. Note: Colors are for illustration purposes only.


COLORS

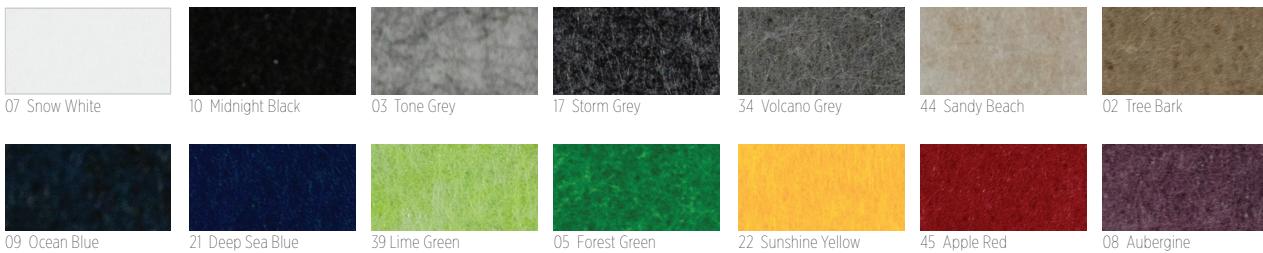

WOOD PATTERNS




PERFORATION PATTERNS

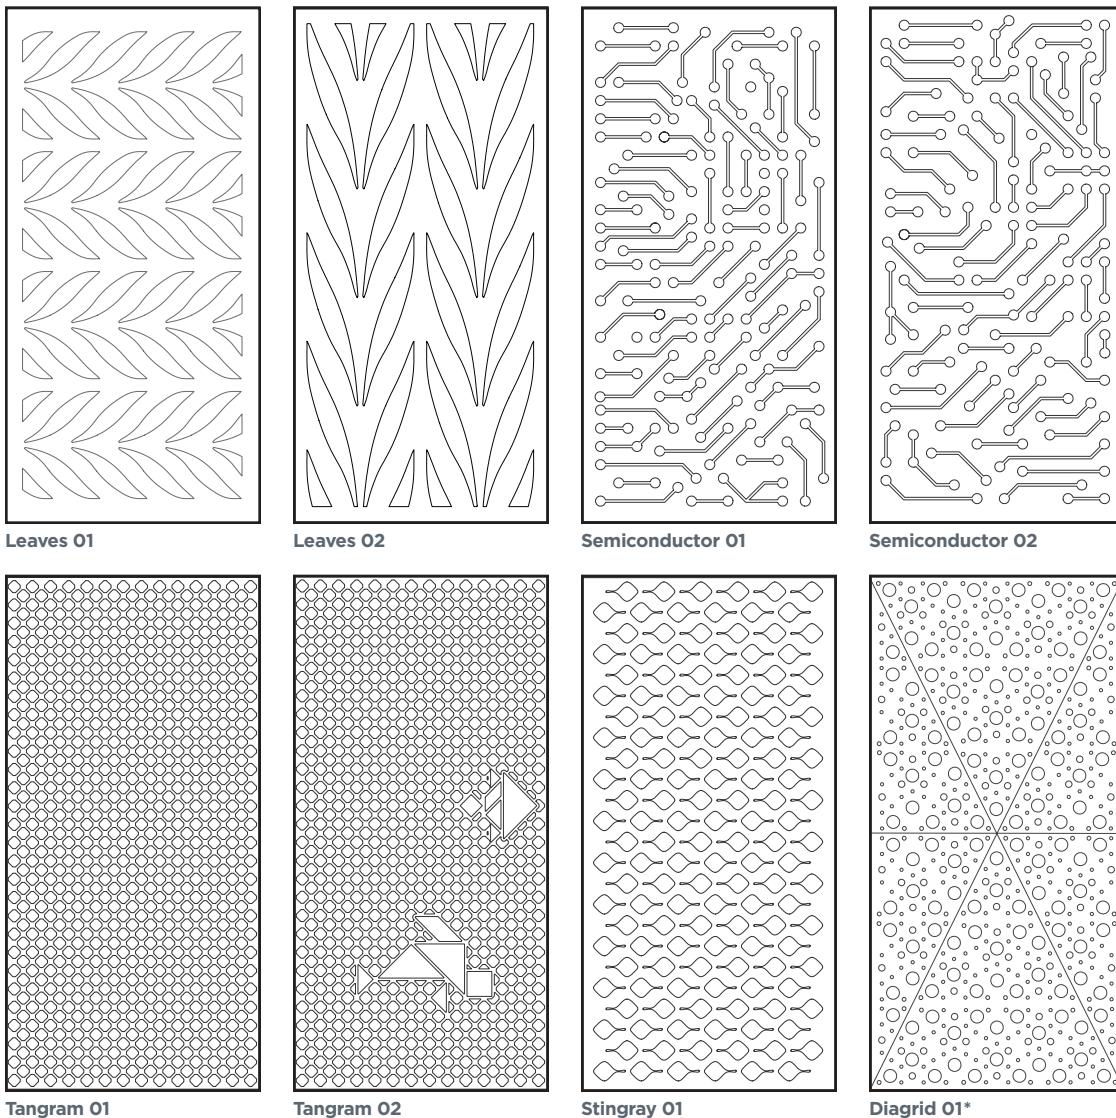


* v-groove detail is only on one side of the panel

INSTALLATION EXAMPLES

Typical Isometric _____

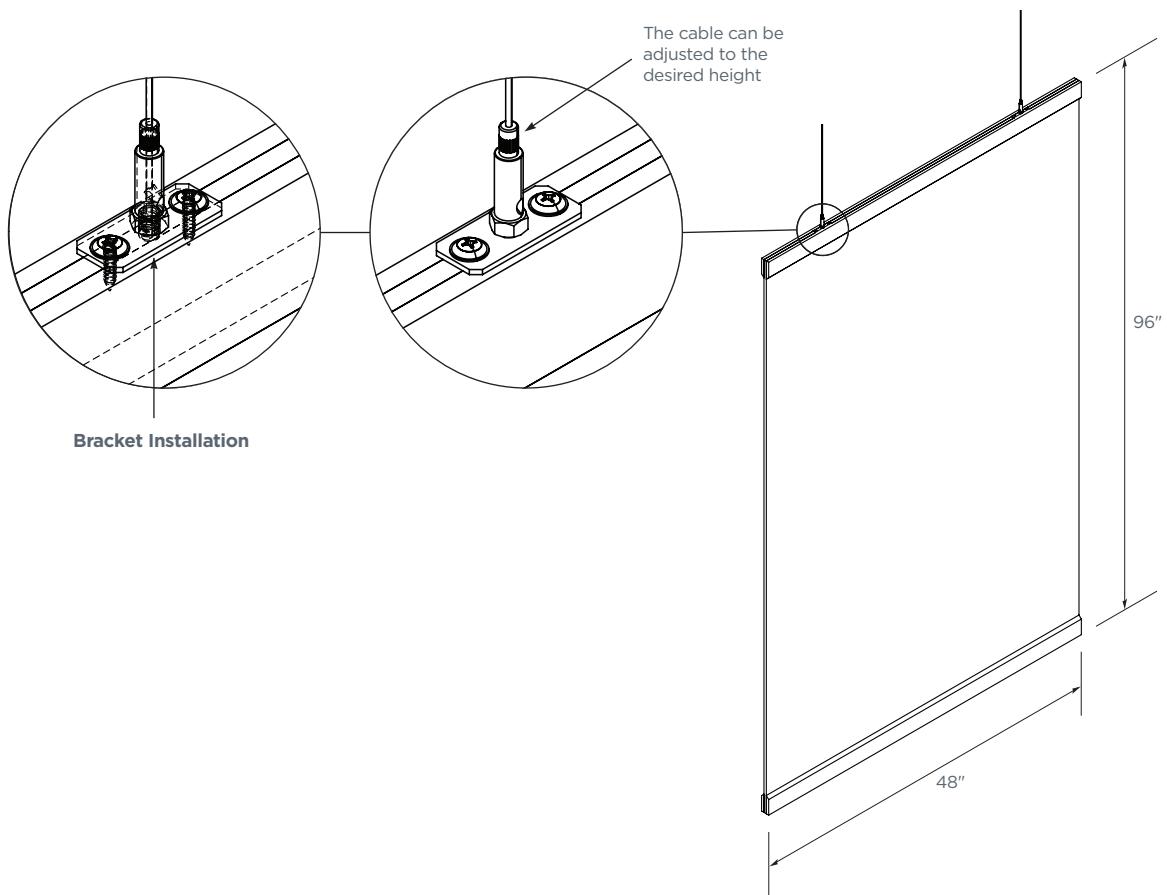

Typical Section _____

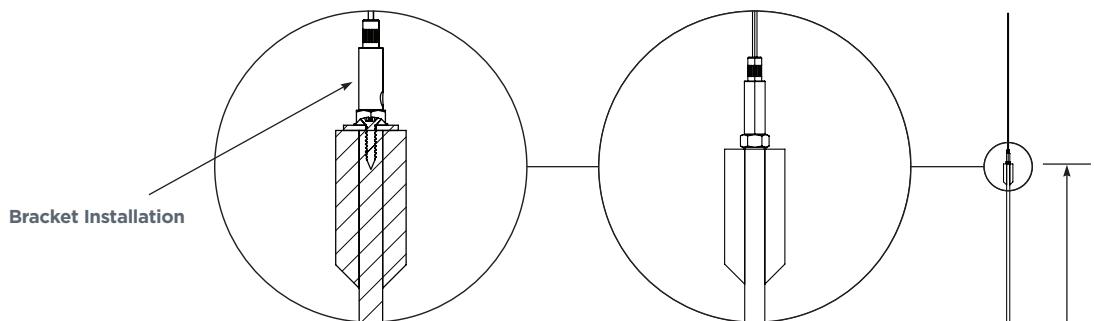
ACOUSTICAL PERFORMANCE
Acoustics

| Frequency (Hz) | 250 | 500 | 1K | 2K | NRC |
|---------------------------|------|------|------|------|------|
| Noise Absorption | 0.35 | 0.54 | 0.85 | 1.22 | 0.75 |
| Sabins per m ² | 1.40 | 2.17 | 3.39 | 4.89 | |

Side View

96"



PHYSICAL DATA

MATERIAL

100% PET Felt

WEIGHT

1.02 lbs./piece

FIRE RATING

Class A Fire Rated per ASTM E84
CAN/ULC-S102: FSR=15, SDC=245

RECYCLED CONTENT

Up to 55%

WARRANTY

2-year Warranty.
Full warranty information can be found at certainteed.com/warranty



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural

© 07/23 CertainTeed, Printed in the USA, Code No. 12-11-2023-US-EN