

# DUNE™ Second Look®

Scored Tegular  
fine texture

USDA  
CERTIFIED  
BIOBASED  
PRODUCT  
99%

Declare.

SUSTAIN®  
High Performance  
Sustainable Ceiling Systems

GREENGUARD  
Gold Certified  
(details below)

LEED®  
WELL™ LBC

UP TO

41%


RECYCLED  
CONTENT

Calculate sustainability with Green Genie®  
armstrongceilings.com/greengenie

energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/ bio-based producer resp.	biobased materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting/ materials	lighting quality	acoustics
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

LOCATION DEPENDENT

\$\$\$\$

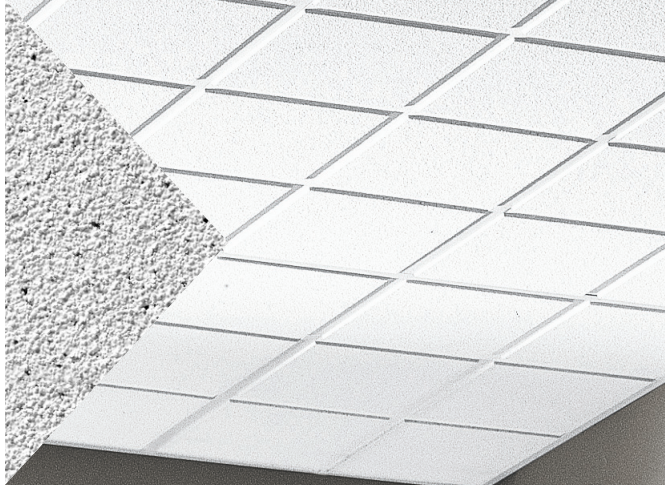

Dune™ Second Look® I panels with Prelude® XL® 15/16" suspension system

Fine textured panels with geometric scored visuals.

## KEY SELECTION ATTRIBUTES

- Upgrade look at a modest price
- Dune™ Second Look® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Content – 99%
- Durable – Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for item 2711, 2712, 2722



## COLOR




White  
(WH)

## FACE VIEW



Second Look I panel – Scoring  
creates nominal 12" x 12" squares



Second Look II panel – Scoring  
creates nominal 24" x 24" squares

## VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
DUNE™ Second Look® I 15/16" Angled Tegular	11	2711	24 × 48 × 3/4"
DUNE™ Second Look® II 15/16" Angled Tegular	11	2712	24 × 48 × 3/4"
9/16" Angled Tegular	27	2722	24 × 48 × 3/4"

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

## PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Bio-Block	Humi-Guard+	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	Warranty
NRC + CAC =				Anti-Mold/Mildew	Sag Resistant		Scratch			
0.50 35 *	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35 *	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35 *	N/A	Class A	0.81	*	*	*	*	Std	*	*

## SUSPENSION SYSTEMS

NOTE: It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.



## PHYSICAL DATA

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

### ASTM E1264 Classification

Type III, Form 2, Pattern C E K  
Fire Class A

### Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

### Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

### VOC Emissions

GREENGUARD Gold Certified  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

### Insulation Value

R Factor – 1.6 (BTU units); R Factor – 0.28 (Watts units)

PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS  
UL.COM/GG  
UL 2618



### Design Consideration

Do not mix Dune™ Second Look® with standard Dune panels in the same room. It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.

### 30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

### Weight; Square Feet/Carton

1.00 lbs/SF; 80 SF/ctn

### Minimum Order Quantity

1 carton

### Metric Items Available

2711M, 2722M, 2712M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine / 1 877 276-7876  
armstrongceilings.com/dune  
BPCS-3223-922

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; UL and UL Certified are trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2023 AWI Licensing LLC

Armstrong®  
World Industries

MINERAL FIBER – Standard