# **Decoustics® Impressions**

A perfect blend of innovation and design freedom, Decoustics Impressions is a ceiling and wall solution that uses fade-resistant digital printing technology to offer 10 hyperrealistic solid wood finishes in non-repetitive patterns.

With impressive acoustical performance properties, it elevates aesthetics in any interior space while enhancing the well-being and productivity of building occupants.

Valued for durability and ease of maintenance, Decoustics Impressions has a lightweight construction that facilitates effortless installation and handling - seamlessly integrating with the Ceilencio® Ceiling Suspension System for convenient plenum access.

#### **Features & Benefits**

- Fully-engineered product delivered to site ready for installation
- Superior solid wood look finishes, random matching
- NRC up to 0.85
- Available with low VOC Components
- Climate and fade resistant
- Washable and Disinfectable with chemical cleaners/sanitizers
- Custom sizes, shapes, forms, and curving capabilities
- Matching painted panel edge
- Maximum panel sizes:
  - Up to 48" x 96"
  - Larger sizes may be available, please contact your sales representative
- Ceiling application and wall application above head height

### **Attributes**



FIRE RATING: CLASS A PER ASTM E84 AND CAN/ULC-S102



SEISMIC RATING: ZONES A, B, C, D, E, F



CUSTOMIZATION AVAILABLE



WASHABLE

## LEED® v4

RECYCLED CONTENT

MR: Building Product Disclosure

EQ: Acoustic Performance

EQ: Low-Emitting Materials

EQ: Indoor Air Quality Assessment

LEED® is a registered trademark of the U.S. Green Building Council.

## **CERTIFICATIONS &** PRODUCT DECLARATIONS







COMPLIANCE **TESTED BY BERKELEY ANALYTICAL (BkA)** 


EPD AVAILABLE HPD AVAILABLE

- BkA VOC Emissions Test Certification VOC Emissions Meet CDPH Standard Method V1.2

## **Decoustics**® Impressions


## **Wood-Look Finishes**

Select from our 10 standard wood grains.

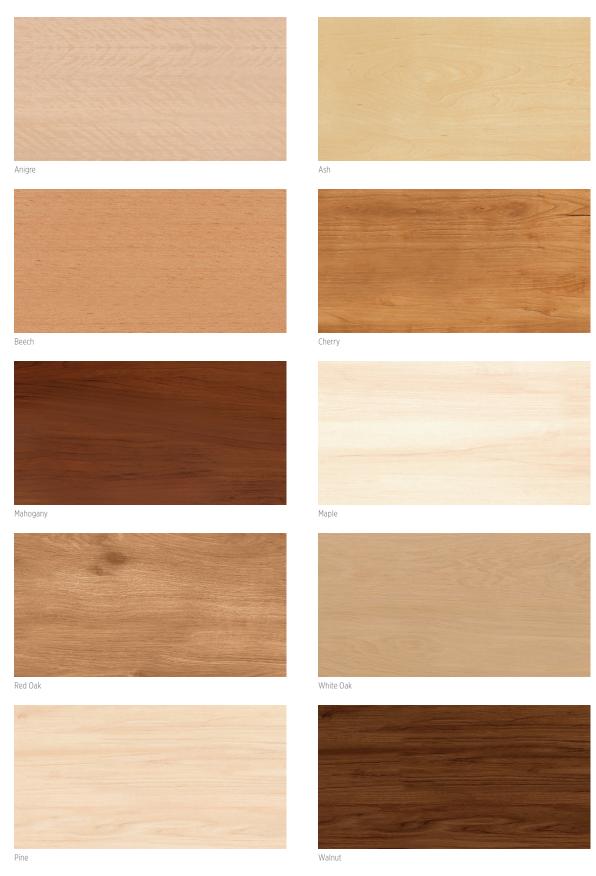


## **Installation Examples**

Typical Isometric -

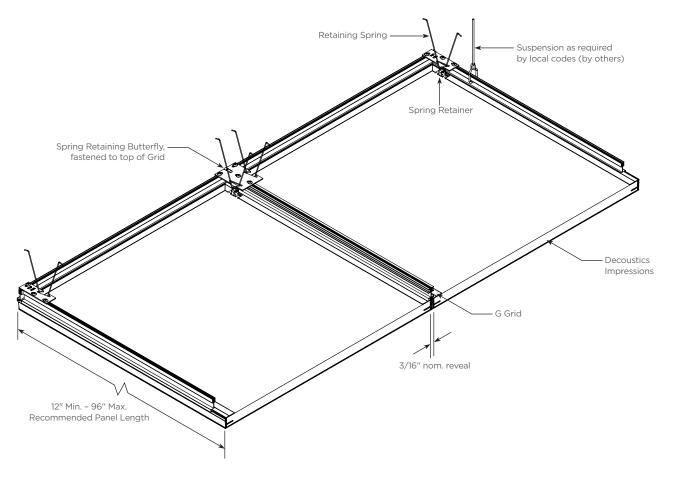

**Typical Section** 

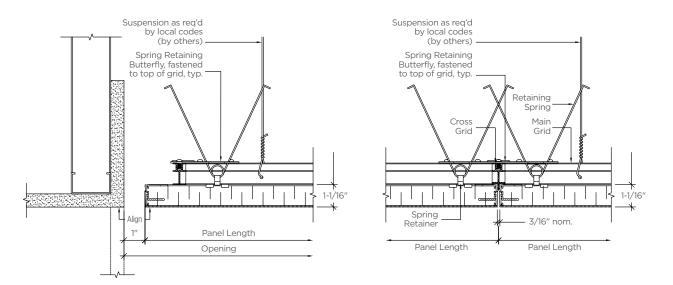



Additional custom panel shapes and sizes, suspension and mounting systems, trims, design returns and finishing options are available for ultimate design flexibility. Contact your local sales representative to get started.



## **Physical Data**

#### MATERIAL

Comes standard in Regular Fiberglass and Components Available in Low VOC Fiberglass and Components Compliance tested by Berkeley Analytical (BkA)

- BkA VOC Emissions Test Certification
- VOC Emissions Meet CDPH Standard Method V1.2
- May not be available with all product configurations



#### **Acoustical Performance**

Additional sound absorption can be achieved by increasing the thickness of the panel or adding an acoustical backer.

MOUNTING TYPE	NRC
E400	Up to 0.85

Acoustical tests performed in accordance with ASTM C423 standards. Test reports available upon request.

#### WEIGHT

Varies nom. 0.9 - 1.7 lbs./sq.ft. (includes suspension)

#### **FIRE RATING**

Class A Fire Rated per ASTM E84: Flame Spread: ≤ 25, Smoke ≤ 50; and CAN/ULC-S102: FSR=25, SDC=95

### SEISMIC RATING

Zones A,B,C,D,E,F

#### RECYCLED CONTENT

Up to 57%

#### WARRANTY

Standard 1-year Limited Warranty for Impressions.

2-year Warranty for Clean Air Impressions. Full warranty information can be found at certainteed.com/warranty

