



The Adagio line provides a white, clean, monolithic ceiling visual. Design with products in the Symphony® f line for more complex acoustical solutions.

FEATURES AND BENEFITS

- Unique composite panel with optimal sound absorption and attenuation
- Fiberglass layer provides exceptional sound absorption and acoustic comfort (0.80-0.90 NRC)
- Offers highly effective sound containment
- Can enhance space privacy compliance (assists with HIPAA requirements in healthcare spaces)
- Exceeds FGI guidelines for cleanability and acoustic performance
- Wash tested to 1,000 cycles with no sign of wear

ATTRIBUTES



**RECYCLED
CONTENT**



**BIOSHIELD®
MOLD/MILDEW
RESISTANT**



**LR
0.90**



**SAG
RESISTANT**




**WASHABLE W/
SANITIZING
CHEMICALS**

LEED® v4


RECYCLED CONTENT		
ADAGIO	15%	
	PRE: 14%	POST: 1%
ADAGIO HIGH CAC	51%	
	PRE: 38%	POST: 13%


- ✓ EA: Optimize Energy Performance
- ✓ EA: Prereq. Min. Energy Performance
- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Daylight
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

ADAGIO			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
TRIM											
	NRC .90	1662-IOF-1	Panels	24 x 24 x 1-1/2	0.90	36	15%	8	32	45	20
		1660-IOF-1	Panels	24 x 48 x 1-1/2	0.90	38	15%	4	32	45	16

REVEAL											
	NRC .90	1662B-IOF-1	Panels	24 x 24 x 1-1/2	0.90	36	15%	8	32	45	20
		1660B-IOF-1	Panels	24 x 48 x 1-1/2	0.90	38	15%	4	32	45	16

NARROW REVEAL											
	NRC .90	1662F-IOF-1	Panels	24 x 24 x 1-1/2	0.90	36	15%	8	32	45	20
		1660F-IOF-1	Panels	24 x 48 x 1-1/2	0.90	38	15%	4	32	45	16


ADAGIO HIGH CAC			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
TRIM											
	NRC .80	1672-IOF-1	Panels	24 x 24 x 1-1/2	0.80	40	51%	8	32	45	20
		1670-IOF-1	Panels	24 x 48 x 1-1/2	0.80	42	51%	4	32	45	16

REVEAL											
	NRC .80	1672B-IOF-1	Panels	24 x 24 x 1-1/2	0.80	40	51%	8	32	45	20
		1670B-IOF-1	Panels	24 x 48 x 1-1/2	0.80	42	51%	4	32	45	16

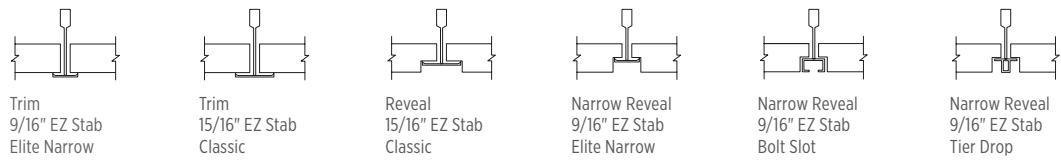
NARROW REVEAL											
	NRC .80	1672F-IOF-1	Panels	24 x 24 x 1-1/2	0.80	40	51%	8	32	45	20

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990.

ACCESSORIES

ADAGIO ACCESSORIES	PRODUCT NAME	PIECES/ CARTON	USE
	1400-SEL-1 Fiberglass Edge Sealant	1	For re-sealing cut edges; 1 quart container

EDGE DETAILS



PHYSICAL DATA

MATERIAL

Composite - Mineral Fiber + Fiberglass

FIRE CLASS

All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

ASTM E1264 CLASSIFICATION

Type XX, Pattern E

MAINTENANCE

Clean panel using a sponge/cloth dampened with water and mild liquid detergent solution. Do not soak panel. Cleanable with sanitizing chemicals.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at [certainteed.com/warranty](https://www.certainteed.com/warranty).



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 [certainteed.com/architectural](https://www.certainteed.com/architectural)