

Product Category: 09.22.16 - Non-Structural Metal Framing

Product Name: 250S125-30

Available Finish: G40, G60

*Other standard coatings referenced in ASTM A1003

Web Depth: 2-1/2 in

Flange Width: 1-1/4 in

Design Thickness: 0.0312 in

Gauge: 30 mills or 20G

Yield stress, Fy: 33 ksi

Weight: 0.54 lb/ft

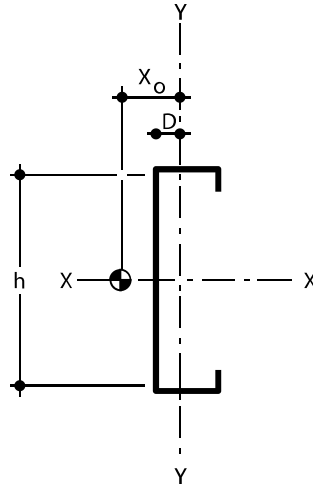
Gross Section Properties

Cross sectional area (A)	0.159 in ²
Moment of inertia (Ix)	0.161 in ⁴
Section Modulus (Sx)	0.129 in ³
Radius of gyration (Rx)	1.008 in
Gross moment of inertia (Iy)	0.030 in ⁴
Gross Radius of gyration (Ry)	0.433 in

Effective Section Properties

Moment of inertia for deflection (Ix)	0.159 in ⁴
Section modulus (Sx)	0.110 in ³
Allowable bending moment (Ma)	2.180 In-k
Allowable bending moment from distortional buckling (Mad)	1.92 In-k
Allowable strong axis shear away from punch-out (Vag)	832 lb
Allowable strong axis shear at punch out (Vanet)	378 lb

- Calculated properties are based on AISI S100-16/S2-20, North American Specification for Design of Cold-Formed Steel Structural Members and meets the requirements of the IBC 2021 Building Code.
- The centerline bend radius is based on inside corner radii shown in thickness chart.
- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A7.2.
- Tabulated gross properties are based on full-unreduced cross section of the studs, away from punchouts.
- For deflection calculations, use the effective moment of inertia.
- Allowable moment includes cold-work of forming.


Torsional Properties

St. Venant torsion constant (J x 1000)	0.052 in ⁴
Warping constant (Cw)	0.037 in ⁶
Distance from shear center to neutral axis (Xo)	-0.890 in
Distance from shear center to mid-plane of web (m)	0.535 in
Radius of gyration (Ro)	1.413 in
Torsional flexural constant (β)	0.603
Unbraced Length (Lu)	28.9 in

Fully Braced Non-Composite Limiting Heights Table Notes

- 5 psf, 7.5 psf, and 10 psf loads have NOT been reduced for strength or deflection checks.
- Calculated properties are based on AISI S100-16/S2-20, North American Specification for Cold-Formed Steel Structural Members and meets the requirements of the IBC 2021 Building Code.
- Limiting heights are based on continuous support of each flange over the full length of the stud.
- Limiting heights are based on steel properties only (non-composite).
- Web crippling checks are based on end-one flange loading condition using 1-inch end bearing.

Non-Composite Limiting Heights – Fully Braced

Spacing (inches)	5psf L/120	5psf L/240	5psf L/360	7.5psf L/120	7.5psf L/240	7.5psf L/360	10psf L/120	10psf L/240	10psf L/360
12	16'-0"	12'-9"	11'-1"	13'-0"	11'-1"	9'-8"	12'-2"	10'-1"	8'-10"
16	13'-10"	11'-7"	10'-1"	11'-3"	10'-1"	8'-10"	10'-6"	9'-2"	8'-0"
24	11'-3"	10'-1"	8'-10"	9'-2"	8'-10"	7'-8"	8'-7"	8'-0"	7'-0"

Interior Composite Limiting Heights

Spacing (inches)	5psf L/120	5psf L/240	5psf L/360	7.5psf L/120	7.5psf L/240	7.5psf L/360	10psf L/120	10psf L/240	10psf L/360	15psf L/120	15psf L/240	15psf L/360
12	18' 5"	15' 10"	14' 1"	16' 1"	13' 10"	12' 4"	14' 7"	12' 7"	11' 2"	11' 0"	11' 0"	9' 9"
16	16' 9"	14' 5"	12' 10"	14' 7"	12' 7"	11' 2"	13' 3"	11' 5"	10' 2"	9' 6"	9' 6"	8' 8"
24	14' 7"	12' 7"	11' 2"	12' 9"	11' 0"	9' 9"	11' 7"	10' 0"	8' 8"	7' 9"	7' 9"	

Additional Information

MRI Steel Framing, LLC is an SFIA member. MRI acts in accordance with the product and quality standards required by the SFIA program.

MRI meets or exceeds ASTM C645, C754, A653, and A1003.

Current LEED credits available upon request