



Church Without Walls, Houston, TX / Photo: © Bob Perzel

The Gladius™ metal ceiling panel snaps into place on a 15/16" grid system using a patented "stab and click" design. The self-centering, self-leveling, and self-aligning installation is confirmed by an audible "click".

FEATURES AND BENEFITS

- Panel size: 24" x 24"
- Square-edge design
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum
- Easy plenum access
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services

ATTRIBUTES



FIRE RATING:
CLASS A
PER ASTM E84
AND CAN/ULC-S102



SEISMIC RATING:
ZONES A, B, C, D, E, F



CUSTOMIZATION
AVAILABLE

LEED® v4

RECYCLED CONTENT

up to 92%

- ✓ EA: Optimize Energy Performance
- ✓ MR: Building Product Disclosure
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Indoor Air Quality Assessment
- ✓ EQ: Daylight
- ✓ EQ: Acoustic Performance

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS



GREENGUARD:
GOLD CERTIFIED




EPD AVAILABLE

COLORS AND FINISHES

A wide choice of colors and finishes as well as custom color matching are available upon request. See website for the most up to date information and to order samples. Colors are for illustration purposes only.

STANDARD PAINT COLORS

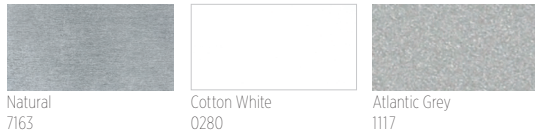


CUSTOM COLORS



WHITE FINISH OPTIONS

Powder-coat paint finish for Arctic White #1015P (Gloss 10-20); Crystalline White #1050P (Gloss 45-55); Supernova White #1085P (Gloss 80-90). Aviation White #1011P: Powder-coat paint finish offering - LRV 90 - 9% gloss finish; Aviation White #1011C: Coil-coat paint finish offering - LRV 93 - 5% low gloss finish.

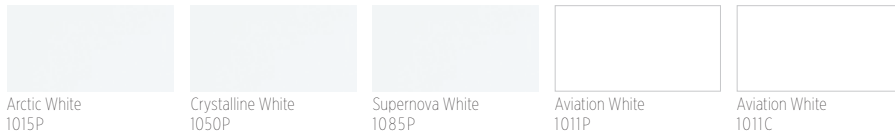


BLACK FINISH OPTIONS

Powder-coat paint finish for Starless Black #5000P (Matte); Raven Black #5030P (Gloss 25-35); Sable Black #5060P (Gloss 65-75); Wet Glass Black #5095P (Gloss 90-95)



DECORATED (POWDER-COAT) WOOD-LOOK OPTIONS


Powder-coat paint finish (interior and exterior). Formaldehyde-free, Class A composite panel. This finish is recommended for exterior conditions.

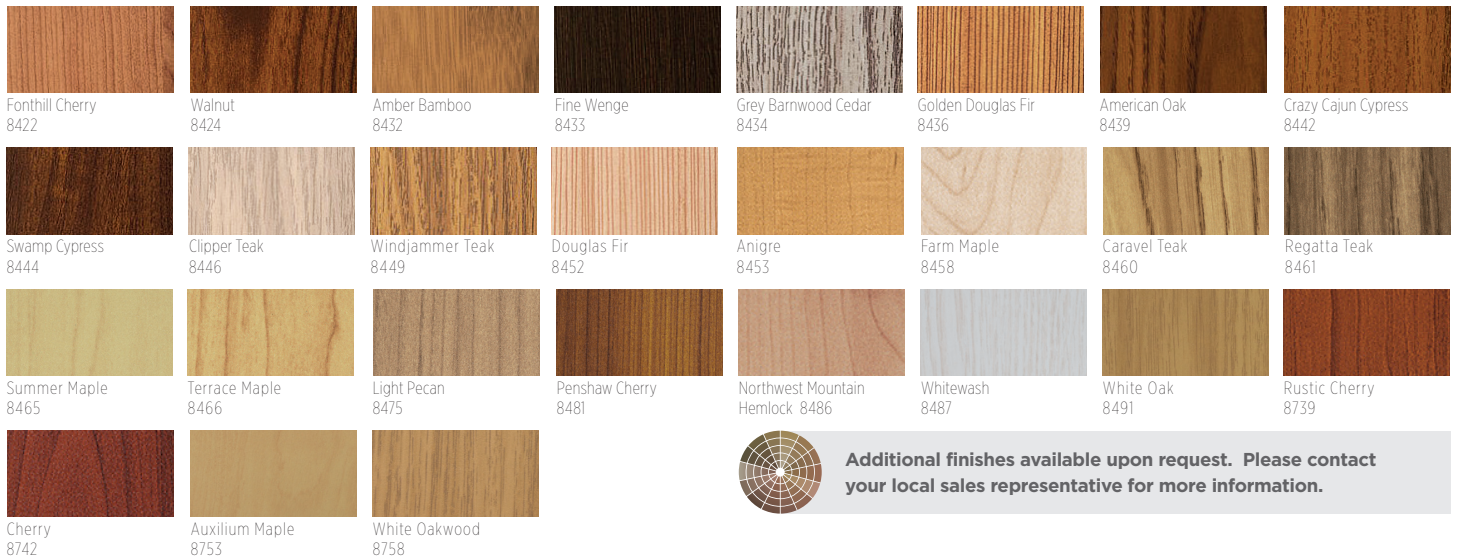


Additional finishes available upon request. Please contact your local sales representative for more information.

PERFORATION PATTERNS


Standard patterns shown. Scale shown: 1:1, unless otherwise noted.




Non-perforated




Pattern #102
Perf. dia.: .157 in.
Open area: 14%




Pattern #103
Perf. dia.: .118 in.
Open area: 20%




Pattern #106
Perf. dia.: .098 in.
Open area: 16%




Pattern #107
Perf. dia.: .157 in.
Open area: 28%




Pattern #109
Perf. dia.: .196 in.
Open area: 36%




Pattern #111
Perf. dia.: .118 in.
Open area: 5%
Scale 1:2




Pattern #112
Perf. dia.: .157 in.
Open area: 7%
Scale 1:2




Pattern #115
Perf. dia.: .063 in.
Open area: 12%




Pattern #119
Perf. dia.: .098 in.
Open area: 8%




Pattern #124
Perf. dia.: .079 in.
Open area: 13%




Pattern #127
Perf. dia.: .063 in.
Open area: 25%




Pattern #132
Perf. dia.: .070 in.
Open area: 20%




Pattern #150
Perf. dia.: .098 in.
Open area: 4%




Pattern #185
Perf. dia.: .050 in.
Open area: 3.1%




Pattern #188
Perf. dia.: .050 in.
Open area: 6.3%




Pattern #201
Perf. dia.: .375 in.
Open area: 19.6%
Scale 1:2




Pattern #202
Perf. dia.: .375 in.
Open area: 5.43%
Scale 1:4




Pattern #301
Perf.: .375 in. sq.
Open area: 11%
Scale 1:4




Pattern #315
Perf.: .375 in. sq.
Open area: 6.25%
Scale 1:4



Pattern #375
Perf.: .375 in. sq.
Open area: 25%
Scale 1:4




Pattern #625
Perf.: .125 in. x .625 in.
Open area: 19.5%
Scale 1:3



Pattern #750
Perf.: .125 in. x .75 in.
Open area: 19.2%
Scale 1:3

INSTALLATION EXAMPLES

Typical Isometrics

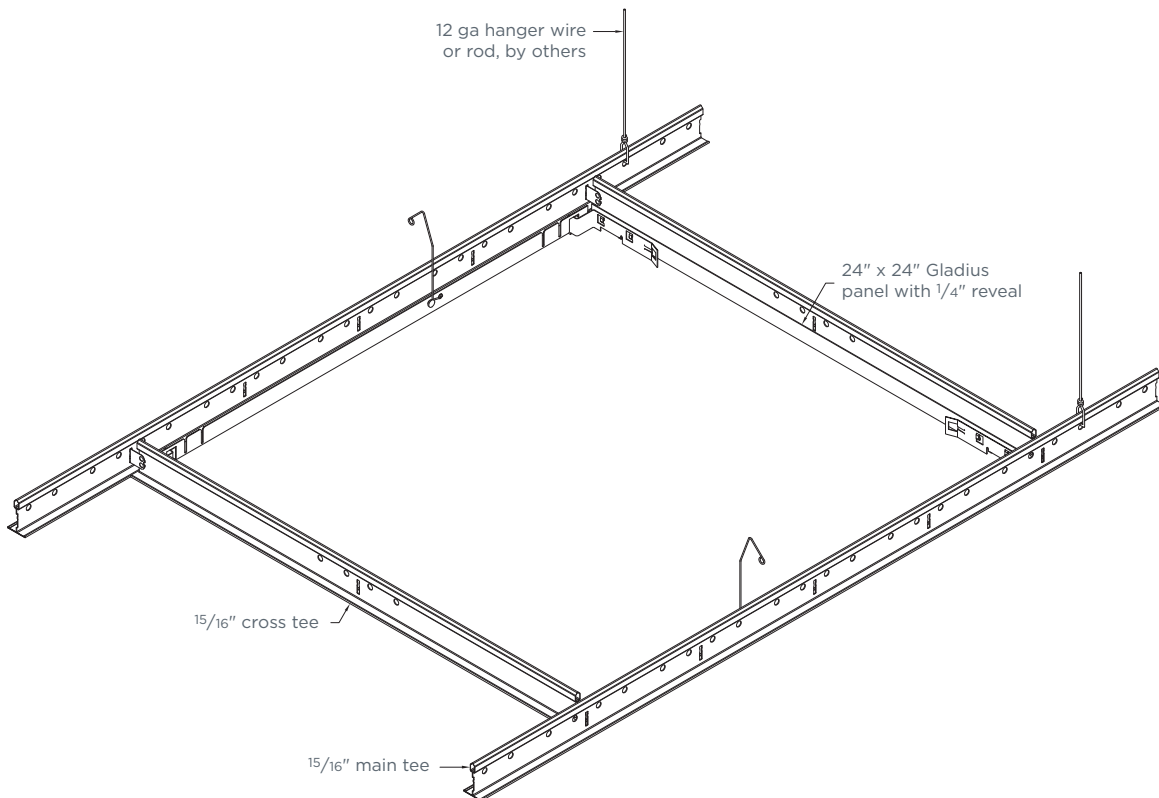

Additional options available for design flexibility,
contact your local sales representative to get started.

PHYSICAL DATA

MATERIAL

Aluminum

WEIGHT

Varies 1.1 lbs./sq.ft.

FIRE RATING

Class A Fire Rated per ASTM E84

– Painted or anodized metal: Flame spread: ≤ 25,
Smoke ≤ 50

Class A Fire Rated per CAN/ULC-S102

– Painted or anodized metal: Flame spread: ≤ 25,
Smoke ≤ 50

SEISMIC RATING

Zones A,B,C,D,E,F

WIND LOAD

Per code. (for exterior applications);
additional clips required

RECYCLED CONTENT

Up to 92%

LIGHT REFLECTANCE (LR) COEFFICIENT

PER ASTM E1264 & ASTM E1477

– Varies with finish
– Cotton White: LR = 0.81
– Aviation White #1011C: LR = 0.93

WARRANTY

1-year Limited Warranty.

Full warranty information can be found
at certainteed.com/warranty

ACOUSTICAL PERFORMANCE

Sound absorption can be achieved by the addition of backing ceiling panels with acoustical fabric or pad.

PERFORATION PATTERN	% OPEN AREA	ACOUSTICAL INFILL	NRC
#103	20%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.80 0.90
#106	16%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75 0.85
#115	12%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass 1.5" – 1.5 pcf Polywrapped Fiberglass	0.65 0.95 0.90
#119	8%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.70 0.75
#127	25%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.70 0.95
#132	20%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75 0.90
#185	3.1%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.65 0.75
#188	6.3%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75 0.90
#201	19.6%	Non-Woven Acoustic Non-Woven Acoustic and 1" – 1.5 pcf Polywrapped Fiberglass	0.75 0.75

Acoustical tests performed in accordance with ASTM C423 and ASTM E795, in a type E400 mounting.

Test reports available upon request.



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural

© 06/22 CertainTeed, Printed in the USA, Code No. 12-11-316-US-EN

