

TECHNICAL DETAILS

Shell Material - Aluminium

Dia of shell - 7.5mm

Base charge - PETN

Primary Charge - ASA

Charge weight/det - 600mg PETN , 200mg ASA

Detonator strength - No. 8 strength

KEY FEATURES

- High-strength delay detonator with accurate millisecond timing.
- Abrasion-resistant shock tube, sealed at one end for moisture protection.
- Available in multiple delay intervals for flexible timing design.
- Optional J-hook attachment for quick connection to detonating cord.
- Colour-coded identification for delay timing and safety.
- Suitable for priming cap-sensitive explosives and boosters.

STORAGE & HANDLING

- Store Neo Det units in a cool, dry, and well-ventilated magazine approved for detonator storage (Class 6)
- Keep case stacks below 2 meters to prevent crushing or deformation.
- For optimal performance, use products within their recommended shelf life (around 24 months) and always follow FIFO (oldest stock first).
- Handle and transport detonators strictly according to applicable local and national regulations.
- Maintain storage conditions that protect the detonators from heat, moisture, and mechanical impact, as these can reduce reliability.

NEO DET

LP/SP

TECHNICAL DATASHEET

Neo det is a high-strength, non-electric millisecond delay detonator designed for reliable in-hole initiation across surface, underground, quarry, and construction blasting. It consists of an abrasion-resistant shock tube crimped to a precision delay detonator, with the free end sealed for moisture protection. The system offers multiple delay intervals for flexible timing design and is compatible with detonating-cord trunklines and standard surface connectors. Selected lengths may include J-hook attachments. It is suitable for priming cap-sensitive explosives and boosters in a wide range of blasting environments.



LP SERIES DELAY SEQUENCE

Delay no.	Dealy(ms)
0	0
1	300
2	600
3	900
4	1200
5	1500
6	1800
7	2100
8	2400
9	2700
10	3000
11	3500
12	4000
13	4500
14	5000
15	5500
16	6000
17	7000
18	8000
19	9000

SP SERIES DELAY SEQUENCE

Delay no.	Dealy(ms)
0	0
1	25
2	50
3	75
4	100
5	125
6	150
7	200
8	250
9	325
10	400

LP/SP SERIES

Length(m)	Units/box	Tube Color
3 - 4	300	Orange
5 - 6	200	Orange

*Other lengths upon customer requirements

Transport Classification	Class	UN Number
Standard Packaging	1.1B	UN 0360
Special Packaging	1.4S	UN 0500



Office: 230, Hill Road, Da Rock Building, 2nd Floor,
Shivaji Nagar, Nagpur - 440010 (MH) India.



+91-8308810133




info@sblenergy.com



www.sblenergy.com

RECOMMENDATIONS FOR USE

- Can be used across the typical temperature range in mining; however, sleep time may drop if temperatures exceed 40°C, so consult technical experts of SBL Energy when unsure.
- Initiate the Neo Det unit within 10 days once loaded into bulk explosives.
- The shock tube is durable, but any cut or split can allow moisture to enter and affect performance. Ensure the detonator is fully enclosed inside an appropriate primer.
- Do not insert uncovered units directly into blast holes or charging hoses.
- For down-the-hole use, place the Neo Det unit with its base facing the hole collar (reverse priming).
- Handle the non-electric tube gently—avoid pulling, twisting, or applying extra force.
- Suitable for operations in abrasive conditions and areas with higher humidity.
- When linking with a detonating cord trunkline, use a plastic J-hook and attach the shock tube at a 90° angle to the cord.
- Use a detonating cord with a minimum strength of 5 g/m when used along with a J-hook.

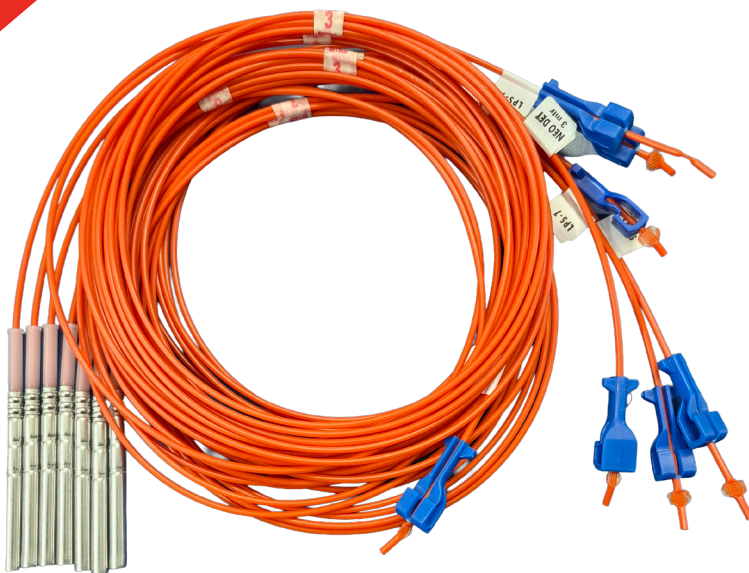

PRODUCT DISCLAIMER

© 2025 SBL Energy Ltd. All rights reserved. The details presented in this document ("Information") are intended to provide general technical guidance regarding the referenced products ("Products"). While reasonable care has been taken in compiling this Information, SBL Energy Ltd does not guarantee its accuracy, consistency, or applicability to every operational environment, and the Information may be updated or amended without prior notice. Explosive Products must only be handled, transported, and used by personnel who are properly trained, certified, and authorized to work with such materials. Users are responsible for assessing site-specific conditions, verifying regulatory requirements, and ensuring that all procedures align with applicable safety standards and legal obligations. To the extent permitted by law, SBL Energy Ltd rejects any form of warranty—statutory, express, or implied—relating to the Information or the Products, including but not limited to performance guarantees or suitability for a particular use. The company shall not be held liable for any loss, damage, injury, or operational consequence arising from reliance on this Information or from misuse or improper handling of the Products.

This document is provided solely for reference and shall not be interpreted as a contractual commitment, product guarantee, or legally binding representation by SBL Energy Ltd.

