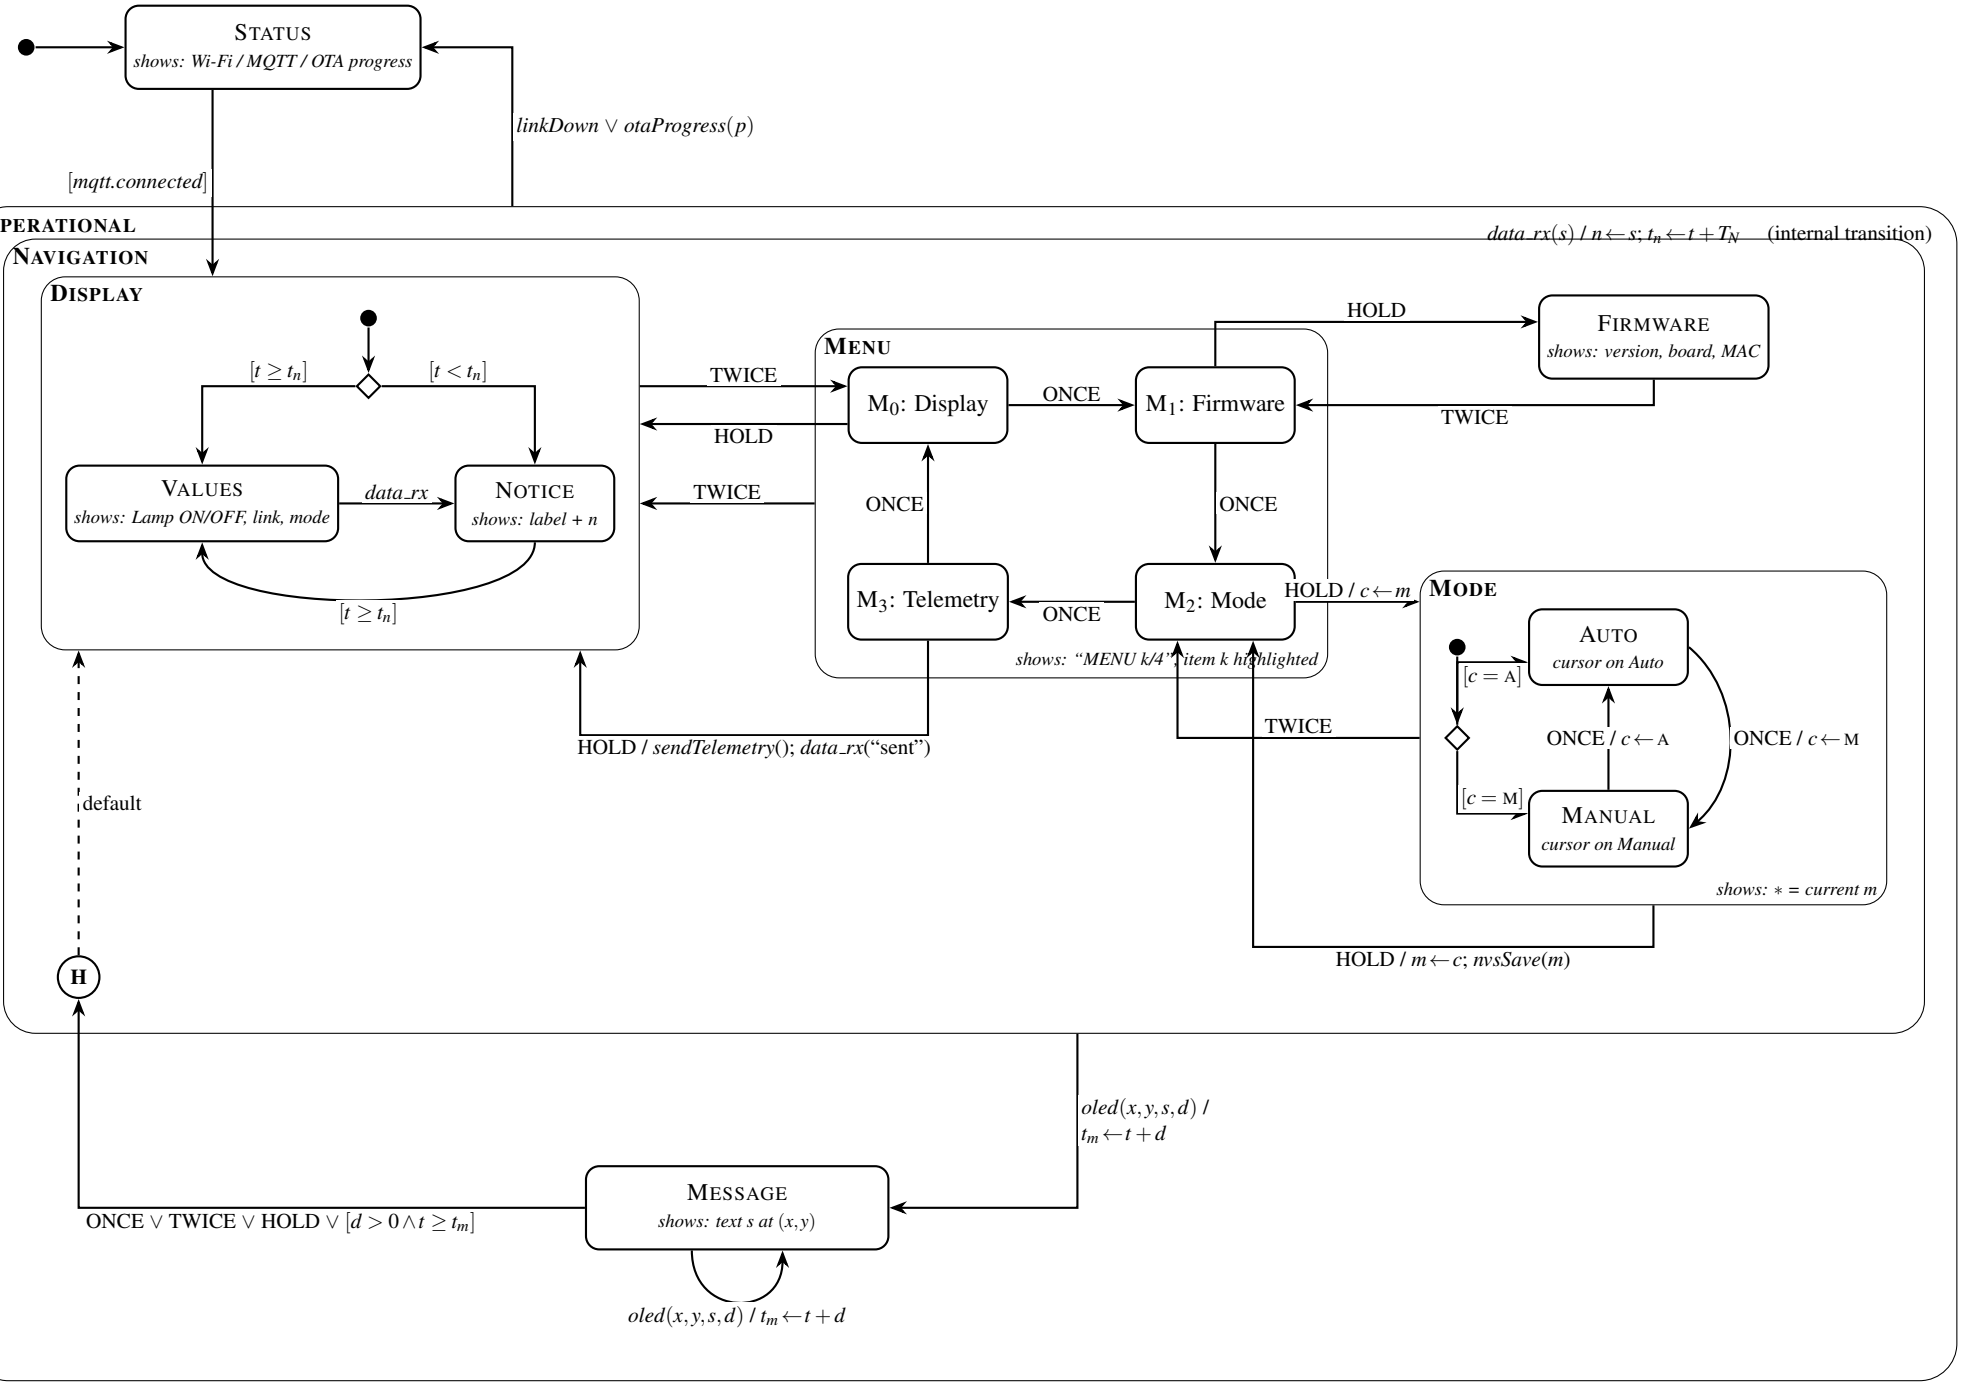


Events ONCE, TWICE, HOLD: outputs of M_B (Fig. 2)
data_rx(*s*): desired / command / rule / error received
oled(*x*, *y*, *s*, *d*): command `oled` {x, y, msg, ms}
linkDown: Wi-Fi/MQTT (re)connecting; *otaProgress*(*p*)
completion guards [·] are evaluated on every `loop()` pass

Variables *c*: highlighted mode, $m \in \{\text{A}, \text{M}\}$: telemetry mode (NVS)
n: notice text, t_n: notice deadline, t_m: message deadline
Constants $T_N = 2$ s; *d* defaults to 15 s ($d = 0$: until a press)
Notation *event* [*guard*] / *action*; H: shallow history
Unlisted (state, event) pairs: ignored. Each state's *shows* is its Moore output.