



由Autodesk教育版产品制作

RoHS Compliant





REV.	ECN NO.	DESCRIPTION	REVISER	DATE
A0		NEW	JAMES	20.01.21

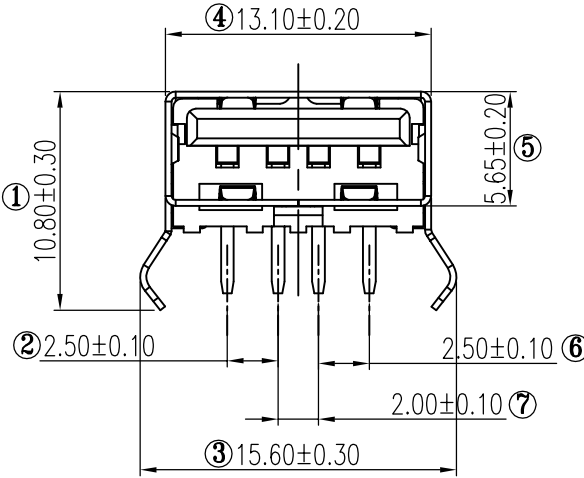

Specification  
Electrical Characteristics:  
Contact Current Rating:1 Amperes.  
Dielectric Withstanding Voltage:AC 500V R.M.S.  
Insulation Resistance:500MΩ Min.  
Contact Resistance:30mΩ Max.  
Mechanical Characteristics:  
Mating Force:3.57kg Max.  
Unmating Force:0.7kg Min.  
Material:  
Housing:PBT or LCP  
Contact:BRASS C2680 Plating Au1u;"3u;"5u;"  
10u;"15u;"30u"  
Shell:SPCC/BRASS.Plating Ni over all

How to Order:

GUBF0A2-04BS1B5-BLR10

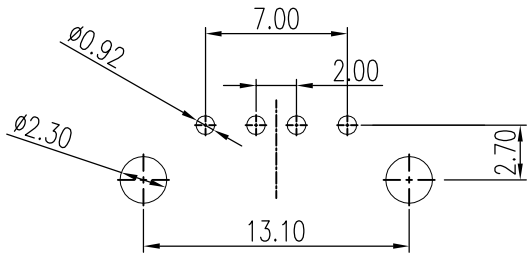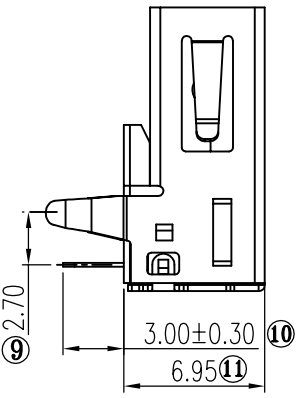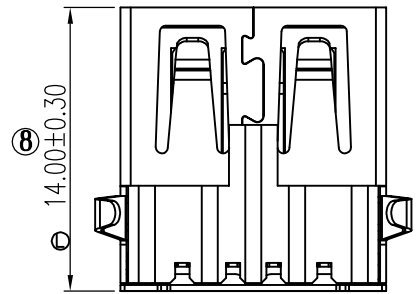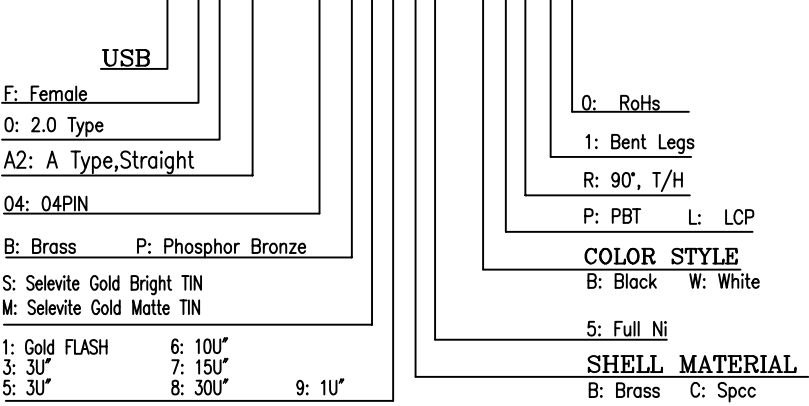

PCB. LAYOUT

比例 (Scale):1:1	图号 (DWG NO.)	东莞市研达电子科技有限公司 DONGGUAN YANDA ELECTRONIC TECHNOLOGY CO., LTD. TEL:0769-85423105 FAX:0769-81501727	
单位 (Unit):mm	设计 (Design)	LUCKY-QIN	
未注公差 Tolerance Unspecified X.X ±0.25 X.XX ±0.20 X.XXX ±0.15 X.' ±2' X.X' ±1'	审核 (Checked)	JAMES-ZHAN	品名 (Title):
	核准 (Approved)	TONY-WANG	USB2.0 AF 90度插板 半金锡G/F
	页次 (Sheet)	1 OF 1	LCP黑胶 铜壳镀镍 直边弯脚
	版次 (Rev.):A0		料号 (P/N):
			GUBF0A2. 04BS1B5. BLR10