Reconstruction and segmentation from sparse sequential X-ray measurements of wood logs

Sebastian Springer, Aldo Glielmo, Angelina Senchukova, Tomi Kauppi, Jarkko Suuronen, Lassi Roininen, Heikki Haario, Andreas Hauptmann *Member, IEEE*

Abstract—In industrial applications it is common to scan objects on a moving conveyor belt. If slice-wise 2D computed tomography (CT) measurements of the moving object are obtained we call it a sequential scanning geometry. In this case, each slice on its own does not carry sufficient information to reconstruct a useful tomographic image. Thus, here we propose the use of a Dimension reduced Kalman Filter to accumulate information between slices and allow for sufficiently accurate reconstructions for further assessment of the object. Additionally, we propose to use an unsupervised clustering approach known as Density Peak Advanced, to perform a segmentation and spot density anomalies in the internal structure of the reconstructed objects. We evaluate the method in a proof of concept study for the application of wood log scanning for the industrial sawing process, where the goal is to spot anomalies within the wood log to allow for optimal sawing patterns. Reconstruction and segmentation quality is evaluated from experimental measurement data for various scenarios of severely undersampled X-measurements. Results show clearly that an improvement of reconstruction quality can be obtained by employing the Dimension reduced Kalman Filter allowing to robustly obtain the segmented logs.

Index Terms—X-ray CT, Kalman filter, sparse measurements, reconstruction and segmentation, industrial quality control.

I. INTRODUCTION

Sequential scanning of dynamic processes or moving objects is a common practice in industrial applications of X-ray tomography [1], [2]. Examples are provided by an object moving along a conveyor belt and scanned by a stationary X-ray scanner, or by a dynamic process that is monitored in a scanning system. A common limitation in such configurations is that a full-scale rotational computed tomography (CT) system is not available, but a continual scanning mode is preferred, potentially with multiple sensor-detector pairs and slower rotational speed, if any. In the case of a moving object on a conveyor belt, this leads to a sequential scanning geometry, in which only few measurements per a two-dimensional slice can be obtained. The limited information may not be sufficient to reconstruct a high-quality tomographic image. Furthermore, if one aims to obtain a full three-dimensional

This work was supported by the Centre of Excellence of Inverse Modelling and Imaging (CoE), Academy of Finland, decision numbers 336787 and 336796. AH was was supported by the Academy of Finland project 338408. SS was supported by the Academy of Finland, project number 334 817.

SS and AG are with the International School for Advanced Studies (SISSA), Trieste. IT

AS, JS, LS, and LR are with the Computational Engineering Department, Lappeenranta-Lahti University of Technology, Lappeenranta, FI

Finnos Oy, Lappeenranta, FI

AH is with the Research unit of Mathematical Sciences, University of Oulu, Oulu, FI and the Department of Computer Science, University College London, London, UK

reconstruction, then information between slices needs to be combined to provide sufficient angular information on the scanned object.

In this study we aim to obtain an accurate two-dimensional tomographic image from only few measurement directions per slice by combining information between the slices. In particular, we evaluate the suitability of a Kalman filtering approach to accumulate measured data along the third dimension, e.g., the direction of movement along the conveyor belt. Usually, Kalman filtering is used to propagate information forward in time. Here, we interpret a sequential scanning of a threedimensional object as an evolution of 2D slices along the third dimension, where the direction of movement serves as the temporal domain or simply a third dimension. As such, we consider this as a 2D+1 imaging scenario, especially applicable if structures change gradually along the third dimension. Most organic materials do so, which gives a natural analogy to a smooth temporal change in a Kalman model. Additionally, for most industrial applications, the crucial goal is not to the tomographic reconstruction per se, but rather the identification relevant features, such as the location of foreign objects or inclusions. In our study, we perform this identification step via a novel image segmentation scheme, obtained by appropriately modifying a recently published unsupervised clustering algorithm named Density Peaks Advanced (DPA) [3].

We evaluate the practical applicability of our approach for a wood log scanning scenario, where the logs move along a conveyor belt, and only few angle X-ray measurements can be taken for each sequentially scanned 2D slice. The aim is to obtain a sufficiently accurate reconstruction with as few angles as possible, by accumulating the information along the third dimension of the log. The secondary task is to accurately and reliably identify knots in the log to optimize a subsequent sawing process. Naturally, the tomographic image can be considered sufficient if all knots are identified correctly in this secondary segmentation task [4], [5]. Conceptually the reconstruction approach considered is directly related to dynamic tomographic problems, where an object is assumed to evolve in time. Consequentially, the majority of related methods consider dynamic imaging problems that evolve over time and use information on the objects motion in the reconstruction task. Here we distinguish between motion compensation [6], [7], that aims to reconstruct a reference state along with motion information, and dynamic reconstructions that provide a reconstruction of the target in the 2D+1 space-time cube [8], [9]. We refer to [10] for a recent overview. Naturally, only

methods of the latter, full dynamic type are relevant here. We provide an overview of related approaches in section II.

Furthermore, most reconstruction tasks are closely connected to a subsequent processing task. For instance, in medical imaging the CT image might be used for identification and quantification of cancer tissue [11]. Thus, in recent years some researchers have also increasingly considered to combine both tasks in a joint framework [12], [13], [14]. Nevertheless, we will concentrate here on a separated approach, but keep the segmentation quality in mind as evaluation criterion of reconstruction quality rather than quantitative reconstruction errors.

This paper is organized as follows. In section II we discuss the tomographic reconstruction task as well as the sequential setting and its relation to dynamic imaging. In section III we present our reconstruction framework based on a dimension reduced Kalman filter. Next we discuss the use of the DPA method for the segmentation task in section IV. We present the experimental setup and results for different scanning geometries in section V, followed by a discussion in section VI. Finally, we conclude in section VII.

II. TOMOGRAPHIC IMAGE RECONSTRUCTION

X-ray computed tomography represents a powerful nondestructive imaging technique that allows to assess objects for quality control. X-rays are emitted and pass through the object of interest, the intensity of the X-ray beam changes governed by the Beer-Lambert law and the resulting intensity is recorded by the X-ray sensor. The obtained projections can be used to form a tomographic image in 2 or 3 dimensions, depending on the detection geometry.

The main challenge connected to the tomographic reconstruction problem is related to its ill-posedness, as small changes in the data, usually caused by unavoidable measurement noise, can have a large impact on the reconstruction quality [15], [16]. The problem of ill-posedness is exacerbated when only sparse data is available. An additional challenge is to maintain computational feasibility for potential online reconstruction scenarios as both data and image can be high-dimensional.

In the following we provide a mathematical formalisation of the tomographic reconstruction problem. Here we consider the linearized problem, after log-transforming the recorded intensities. The linear forward mapping from the tomographic image x to the X-ray measurements y then consists of integrating over straight lines travelling trough the target, where the geometry depends on the measurement system. Here we will consider a fan-beam geometry, that will be further explained in section V. This measurement process can then be represented by a matrix A. The measurement model is then given by

$$y = Ax + \eta \tag{1}$$

where the y is the measured sinogram that consists of X-ray projections for several measurement angles, x is the tomographic image to be reconstructed, and η denotes measurement noise.

The corresponding inverse problem consists in reconstructing x from the available measured sinogram y under knowledge of the scanning geometry described by A. This needs to be done in a robust manner to prevent the noise η , to corrupt the tomographic image. The most common reconstruction is given by filtered backprojection (FBP), which consists of a frequency filter of the measured data, followed by the backprojection operation given transpose matrix A^T of the forward matrix. Unfortunately, the FBP assumes dense angular sampling and does not provide sufficient reconstruction results under sparse scanning geometries [16].

Alternative approaches are given by a variational formulation of the reconstruction problem [17]. That is, we aim to find the reconstruction $x_{\rm rec}$ as the minimizer of a cost functional. In the simplest quadratic case the reconstruction can be obtained as

$$x_{\text{rec}} = \arg\min_{x \in X} \frac{1}{2} ||Ax - y||_2^2 + \alpha ||x||_2^2,$$
 (2)

where α balances between the two terms. The first term measures the goodness-of-fit, or data-discrepancy, whereas the second term is the so-called regularizer ensuring convergent and robust reconstructions. A major advantage of the formulation in (2), is that the solution can be represented in a closed form as

$$x_{\text{rec}} = \left(A^T A + \alpha I\right)^{-1} A^T y,\tag{3}$$

where I is the identity matrix. We note that other regularizers can be considered in (2), that encode different prior information on the expected targets. For instance, piece-wise constant reconstructions via total variation [18], [19], wavelet sparsity [20], or even learned regularizer [21].

A. Sequential tomography

It is commonly known, and easily verified by reconstructions of logs with high resolution, that logs of wood are objects whose internal structure varies slowly along the vertical direction. Two consecutive sections of a log are almost always similar to each other, if the distance between them is in the order of 2-5 millimetres. This observation makes it obvious that the quality of the reconstructions obtained from sparse angle data could be improved by using the information of one or more neighbouring slices.

Examples of approaches that fit this scenario are reconstruction algorithms for evolving targets. A classic way to propagate information forward is given by filtering approaches like Kalman Filters (KF), which are designed for estimating the states of time series models. Alternatively, one could also consider data-driven methods such as recurrent neural networks, if large amounts of high quality data are available. Here we will focus on the former as the availability of abundant high quality measurements is not always freely available. We mimic the time series type of data by considering the wood log as a sequence of 2D slices that evolve as the log passes trough the scanner.

That means, we do not aim at reconstructing one image or volume at a time as formulated in eq. (1), but rather a series of reconstructions x_k for k = 0, 1, 2, 3, ... Here, each x_k corresponds to a 2D image and a 3D volume is obtained

by a stack of 2D reconstructions. The essential task of the dynamic reconstruction problem is now to use the relation between slices x_k efficiently to compensate for possible highly sparse measurements for each k separately. Naturally, in order to accumulate the information along the third dimension, the measurement geometry, i.e., the angular sampling, needs to change. That means, the forward matrix changes for each slice. The sequential measurement model is then given by

$$y_k = A_k x_k + \eta_k. (4)$$

At each slice x_k we take a different set of measurements modeled by A_k and obtain the corresponding measurement y_k under noise η_k .

III. DIMENSION REDUCED KALMAN-FILTER

There exist a vast amount of filtering approaches. For reasons of computational efficiency we select to build our model on the previously introduced Dimension Reduced Kalman Filtering (DrKF) method [22], [23]. In DrKF, the X-ray reconstructions are parameterized by a low-dimensional basis, that reduces the dimensionality of the state space, and consequently decreases the computational cost. Let us give a brief summary of the method considered, for further details see [22], [23]. That is, we consider the following pair:

$$x_k = M_k x_{k-1} + \epsilon_k \tag{5}$$

$$y_k = A_k x_k + \eta_k \tag{6}$$

where x_k is the k-th section of our scanned log; $M_k = I$ is our forecast operator, moving from one slice to the following one; ϵ_k is a zero mean Gaussian model error with covariance matrix Q_k ; y_k is the sinogram data; the observation A_k is the forward matrix from eq. (4) and η_k is a zero mean Gaussian observation error with covariance matrix R_k .

For k=0 we have x_0 as in eq. (3) with A substituted by the projected form A_0P_r , which we will explain next. The idea of dimension reduction is to constrain the problem into a subspace that contain most of the variability allowed by the prior. The projection matrix P_r used for prior-based dimension reduction is obtained from the prior covariance matrix Σ using the singular value decomposition. In this notation r stands for the r leading singular values used. One can factorize the covariance matrix as $\Sigma = USU^T$ where U is a unitary matrix containing the singular vectors and S is a diagonal matrix containing the singular values. The projection matrix P_r can be obtained as:

$$P_r = U_r S_r^{1/2} \tag{7}$$

Let us now parametrize our images using the projection matrix P_r as

$$x_k = x_k^p + P_r \alpha_k \tag{8}$$

and thus obtain the following prediction step

$$x_k^p = M_k(x_{k-1}^p + P_r \alpha_{k-1}^{est})$$
(9)

$$C_{h}^{p} = (M_{k}P_{r})(\phi_{h-1}^{est})(M_{k}P_{r})^{T} + Q_{k}$$
(10)

where x_k^p is the prediction mean and C_k^p is the prediction covariance matrix. The time consuming update step is performed in the lower dimensional space,

$$\alpha_k^{est} = \phi_k^{est} (A_k P_r)^T R_k^{-1} (y_k - A_k x_k^p) \tag{11}$$

$$\phi_k^{est} = ((A_k P_r)^T R_k^{-1} (A_k P_r) + P_r C_k^{p-1} P_r + \xi I)^{-1}$$
 (12)

We note that the above equations are conceptually similar to eq. (3), to produce the update for x_k^p in eq. (9). To further reduce the computations one can observe that $C_k^p = B_k B_k^T + Q_k$, $B_k = M_k P_r V_k$, $\phi_{k-1}^{est} = V_k V_k^T$ and therefore obtain:

$$(C_k^p)^{-1}P_r = Q_k^{-1}P_r - Q_k^{-1}B_k(B_k^TQ_k^{-1}B_k + I)^{-1}B_k^TQ_k^{-1}P_r.$$

Additionally, in the computation of ϕ_k^{est} we introduced a regularizer here before taking the inverse to avoid getting a singular matrix, this showed to be necessary for the highly sparse imaging scenarios under consideration here. The regularizer is given by the identity matrix multiplied by a constant that grows linearly with slope $\xi=0.1$ as the number of angles are increasing.

IV. SEGMENTATION

In the literature one can find many articles [24], [25], [26], [27], [28], [29] and reviews [4], [30] describing various kinds of approaches that can be used to locate specific structures like knots, cracks, resin pockets and alien objects inside logs from high quality reconstructions obtained using low speed CT scanning. Most of these approaches have a knot detection rate exceeding 90% with about 1% falsely detected knots. However, in contrast to standard measurements settings, this work focuses on severely sparse angular measurements and levels of perturbations much different to those of medical CT scanners. To deal with this scenario, we propose to use an unsupervised segmentation approach particularly robust against noise.

A. Segmentation by Density Peaks Advanced (DPA)

We consider a fully unsupervised clustering approach, the Density Peaks Advanced (DPA) proposed in [3] to segment the reconstructed log either slice by slice (in 2D) or directly in 3D. In the experiments presented in section V all segmentations have been done directly on blocks of 11 consecutive slices. The original algorithm consists of the combination of a non-parametric density estimator, the Point Adaptive k-nearest neighbour (PAk) [31], and the Density Peaks (DP) clustering algorithm [32] modified with three heuristics. In the following paragraphs we will give a summary of the main ideas of the method. For further details see [3].

Given a point cloud of data to cluster DPA starts by estimating, for each point i, its log-density $\log(\rho_i)$, the error on the log-density ζ_i and the \hat{k} optimal neighbourhood size in which the density can be assumed to be constant.

In our case we assign to the variable ρ_k the approximation of the densities obtained by our reconstructions x_k and we estimate the noise level from the background noise (mean 0.033 and std 0.003), while we fix the optimal neighbourhood size is fixed to 200 so as to represent the minimum dimension that a knot needs to have to be considered relevant.

The next step in the procedure is to find automatically the density peaks (or 'clusters') of the image. This can be done by observing that density peaks are surrounded by neighbours with lower local density but at relatively large distant from points with higher local density. To make our estimates more robust against noise, cluster centers are defined as points that maximizes locally, and in a statistically significant manner, the error-scaled log-density $g_i = \log(\rho_i) - \zeta_i$. This is done as follows.

We start by finding a preliminary cluster assignment using $\underline{\text{Heuristic 1}}$: A point i is a local density center, if all its \hat{k} nearest neighbours have a value of g lower then g_i and it does not belong to the neighbourhood of any other point with higher g. After all the centers have been found, all the points are assigned to the same cluster of the nearest point with higher cost function value.

The next task is to find the points on the border between two clusters using

Heuristic 2: A point i of the cluster c is defined to be on the boundary between the two clusters c and c' if its closest point j of the cluster c' lies within the distance $r_{\hat{k}}$ given by its optimal neighbourhood \hat{k} . Moreover it must be the closest to j among those belonging to c. The saddle point between two clusters c and c' is defined as the point with higher value of g between those on the boundary between the two clusters.

The log-density of the saddle point and its error are then defined respectively as $\log(\rho_{cc'})$ and $\zeta_{cc'}$. Based on these last two quantities it is possible to write a criterion for distinguishing genuine density peaks from false peaks generated from measurement errors using

<u>Heuristic 3</u>: A cluster c is considered to be the result of a density fluctuation if all its values have comparable density values to the one on the border. In particular, cluster c is merged with the cluster c' if

$$(\log(\rho_c) - \log(\rho_{cc'})) < Z(\zeta_c + \zeta_{cc'})$$

where ρ_c is the density of the center of the cluster c, and the constant Z fixes the level of statistical confidence. Heuristic 3 is checked for all the clusters c and c' in decreasing order of $\log(\rho_{cc'})$.

The segmentation map obtained contains statistically significant clusters (each labelled with increasing positive numbers), which will be characterised by grid points having higher density of absorption. All the other will be assigned to the so called 'halo' cluster (labelled as -1). As our goal was only to spot density anomalies within the logs we will merge together all the statistically significant clusters by assigning all of them to the same cluster.

B. Implementation

The described segmentation method is implemented in Python using the DADApy toolbox [33], while the DrKF reconstruction part is done in Python by using standard libraries. As stated previously the main difference with respect to the examples given with the DADApy toolbox is that we start from the approximation of the densities obtained by our reconstructions, we use the statistic of the background noise

to assign a noise value to each grid point and we fix the neighbourhood size to separate genuine knots from density fluctuations, while in general the toolbox would estimate all the values from point clouds of data.

V. WOOD LOG RECONSTRUCTION AND SEGMENTATION

In the sawing process the logs are cut into boards. Summarizing in one sentence, we can say that optimizing this process consists in producing the highest possible quality boards from each log, minimizing the waste of time and resources. In this context quality is directly correlated with economical value and therefore it is important to estimate the potential of each wood log in terms of boards that can be obtained from it. To do so, the following must be considered: one must know the internal structure of each log, locate all the elements that can influence the product quality (e.g. cracks, knots, foreign objects, etc.), and finally optimize the cutting parameters such as angle and dimensions to maximize the potential value of the extracted boards.

The first step is therefore getting accurate CT images from sparse sequentially obtained projection data. The reason why there is a need for methods that can work well with few angles is mainly economical, as every extra X-ray source added has a significant impact on the cost of the measurement device and consequently also an overhead cost added to the sawing process.

In this section, we will study, within the proposed filtering framework, how reconstruction quality decays as the number of sources decreases for different acquisition schemes. The comparison will be done on the reconstruction and the corresponding segmentation, where our reference will be the reconstruction obtained with standard methods and dense X-ray measurements.

A. Acquisition geometry and data calibration

The data used in this work has been produced by the Finnish company Finnos Oy, specialized in solutions for sawing industry [34]. A schematic representation of the tomographic set-up used to produce the data we used can be found in fig. 1. The X-ray scanner, fixed around the conveyor belt along which the log is moved and rotated, is represented by a source emitting the fan-shaped X-ray beams and a corresponding flat line detector which consists of 768 pixels that records the beam intensities.

We define as Δ the angular difference between consecutive sources in the acquisition geometry. To obtain the exact geometric values shown in fig. 1 we used a calibration procedure using two wooden phantoms fig. 2, which were used and at the end of the scanned log to calibrate the parameters of our virtual geometry implemented in python with ODL [35] using ASTRA [36].

As reference object in this work we selected a spruce trunk. We scanned the trunk with dense angular measurements every 2mm in the vertical directions so as to tune the respective system matrixes and obtain our reference reconstructions using FBP. We then sub-sampled the respective sinograms to use them as data for our approach.




Fig. 1: A schematic drawing of the fan-beam acquisition geometry. Here S represents one of the X-ray sources while D=1154.2 is the plate on which detectors were installed. The parameter $r_S=859.46$ is the distance between the X-ray source and center of rotation, $r_D=705.37$ is the distance between the center of rotation and the detector, $h_S=232.86$ is the source shift, $h_D=-24.65$ is the detector shift, $\alpha_D=0.16$ is the detector tilt, and $n_D=768$ is the number of detector elements.

We note that despite all the precautions one can introduce to maintain the consistency of the data, a certain uncertainty remains in the parameters of the fan-beam geometry due to different sources of vibrations and mechanical displacements introduced while the log is moved on the conveyor belt. Thus advanced and robust approaches for reconstruction are indeed necessary.

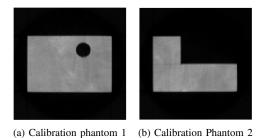


Fig. 2: Wooden phantoms used to perform the system matrix calibration

B. Reconstruction and Segmentation

In this section we will examine how the quality of the reconstruction and subsequent segmentation decreases as the number of sources decreases for different rotational schemes. We refer here to rotation regardless of whether it concerns the log or the measurement system, as it can be implemented either way in practice. First we will show how rotation plays a fundamental role in the quality of the reconstruction. In the absence of rotation we will see how there is practically no improvement in the quality of the reconstruction when using the DrKF. On the other hand, even if rotation occurs in very small increments the situation improves, but the internal nodes are still not adequately reconstructed. The situation is different

if the angle between measurements Δ is sufficiently large or even randomized. In that case it is possible to obtain a quality of reconstruction sufficient to obtain a decent segmentation even with only 3 angles per slice.

The image resolution adopted in the following experiments was 128^2 while the lower dimensional space of the filtering approach was chosen as r=3000, which is about $\sim 18\%$ of the original problem size. The tradeoff between reconstruction quality and computational speed can be modified by increasing or decreasing r according to the specific needs.

1) Reconstructions with fixed acquisition geometry: In the first result presented we will use as reference 15 consecutive slices taken from one scanned log. We start our computation from a fixed first first slice number 217 and proceed with the DrKF formulas by keeping the system matrix fixed, namely in absence of rotation. The first and last of these 15 reconstructions are presented in fig. 3 in comparison the the FBP from full angular data. As it can be seen, there has not been any significant accumulation of information after 15 iterations of the filtering formulas. Moreover, the quality of the reconstructions does not allow for the segmentation method used to locate the knots inside the wood log.

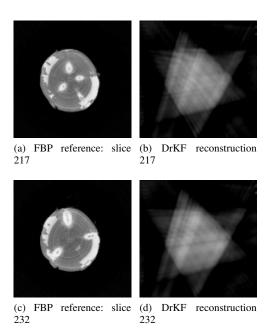


Fig. 3: (a) and (c) are the reference figures obtained using FBP and dense sampling with 360 measurement angles while (b) and (d) are the respective reconstructions obtained using DrKF and a fixed system of 3 X-ray source-receiver pairs.

2) Reconstructions with rotating acquisition geometry: From now on we will consider only cases with rotating acquisition geometry. As reference we will have two sections of 11 slices centred respectively at fig. 4a and fig. 4b. We will use a burn-in period for the Kalman filter of 50 slices before the reference blocks are computed to have consistent and comparable reconstruction quality between the different imaging geometries.

We start by considering the ideal case in which two consecutive acquisition geometries have a random angular

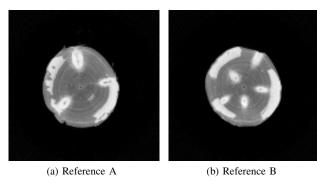


Fig. 4: Two reference slices used to compare the reconstruction/segmentation quality

increment, and we present reconstructions with increasing odd number of sources from 1 to 15. Where the difference between consecutive sources Δ is uniformly chosen over 360 degrees. As an example for 5 sources these will be located at (0,60,120,180,240) and an angular increment of 5 degrees we will move these to (5,65,125,185,245) in the next slice.

The visual inspection of the resulting reconstructions for the Reference A presented in fig. 5 indicates that the reconstruction quality is already good when using only 3 sources and does not increase significantly if one would use more than 5. This is further confirmed from the Peak signal-to-noise ratio (PSNR) [37] values given in fig. 10.

Next follows the case in which the scanner is rotating at a constant slower speed so that every consecutive reconstruction is obtained with an acquisition geometry rotated by just 1 degree with respect to the previous one. In this case the reconstruction quality is clearly lower as can be seen from fig. 6 and it is further confirmed from the PSNR coefficients given in fig. 10 as the values are all lower then the 3 sources reconstruction given in fig. 5.

The last type of acquisition scheme presented consist in a constant rotation with increment given by the closest entire number to 1/4 of the angular difference between two sources Δ , co-prime with Δ . In this way it takes 5 iteration steps (approximately 1 cm within the log) before returning to a set of angles that is close to the initial, but rotated slightly. For example for the 5 sources case described above the rotation angular increment is given by 16. Both the visual inspection of the resulting reconstructions for the Reference A presented in fig. 7 and the PSNR coefficients of fig. 10 indicate that this scheme produces similar results to those of the random angular rotation. We performed the same test also for the Reference B and the reconstructions presented in leads to similar conclusions.

3) Segmentation comparison: We then segmented all the reconstructions presented previously to assert the ability of the segmentation method to spot the location, size and direction of the knots within the wood logs. Figure 9 contains both the reconstruction of the reference reconstruction given in fig. 4a and those given in fig. 7. We concentrate here on the last measurement scenario with larger angular increments, as it delivers a good reconstruction quality under a realistic

imaging scenario. We note, that the wood logs scanned were not dried before measurements were taken and therefore the external wet rings of the tree are having a density of absorption indistinguishable from the knot parts. This wet part can be clearly seen in the segmentations and represents a good portion of the selected pixels. As a consequence, the Dice squared coefficients [38] is influenced both by the wet parts and by the knots. Nevertheless, the segmentation method used is able to locate the knots adequately already with 3 sources and it does not improve significantly for schemes having more then 5 sources. A similar behaviour was observed for the random angular sampling. This is confirmed in fig. 10, which further shows that the last acquisition scheme presented has a comparable precision to the random rotation case, for all the different number of sources considered. Where only a slight disadvantage is observed for less than 5 angles.

VI. DISCUSSION

In the previous section, we have shown how rotation of the acquisition geometries affects greatly the reconstruction quality. We studied four different schemes including rotating and non rotating acquisition geometry. In the non rotating case we saw that there is no gain in using the DrKF formulas. We saw also that the speed of rotation needs to be chosen properly in order to get the best out of this approach. The take home message is that to exploit the potential of the filtering formulas we should cover, with the number of sources available, the angular sampling of the measurements for each 2D section as efficiently as possible within approximately 5 slices (about 1 cm in the vertical direction). The results given in fig. 10 indicates that, if the rotation speed is tuned properly, one could obtain fair results by using as little as 3 X-ray sourcedetector pairs and we do not get significant gains by using more than 7. Alternatively, to the fixed rotation speed, one could also consider to find an optimal sampling strategy for the scanning procedure [39], but which would add a significant computational overhead to the reconstruction.

A. Limitations

Despite the good performance obtained in terms of precision we must state also that the computational times per slice in the current implementation is too high for online use. For the experiments presented here, most of the computational effort $\sim\!15$ sec. is used to obtain one slice reconstructed while 0.7 sec. are in average needed to segment a block of 10 slices. The time per slice reconstructed could be reduced about 10 times if we would be using a lower reconstruction quality, namely with r=1000. We note that this time values take into account that we pre-computed all the system and projection matrices needed in the DrKF formulas, as assembling each matrix representation to solve the update equations for the Kalman filter would require over a minute.

Finally, it should be noted that the need for a the correct rotation between slices is a practical limitation and needs to be addressed to allow for a high throughput system.

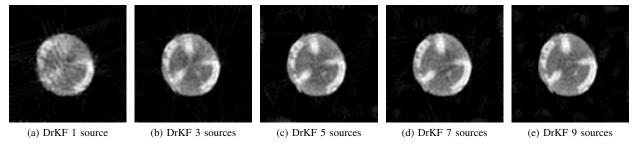


Fig. 5: DrKF reconstructions of the Reference A with acquisition geometry rotating with random speed.

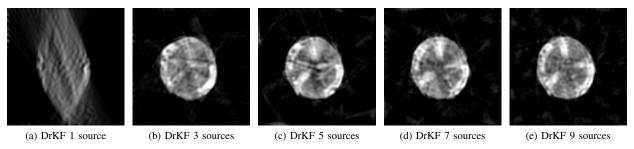


Fig. 6: DrKF reconstructions of the Reference A with acquisition geometry rotating by 1 degree between consecutive slices.

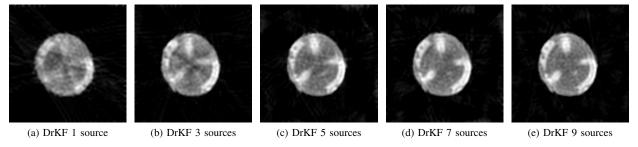


Fig. 7: DrKF reconstructions of the Reference A with acquisition geometry rotating by $\Delta/4$ degree between consecutive slices, where Δ is the angular difference between consecutive sources in the acquisition geometry.

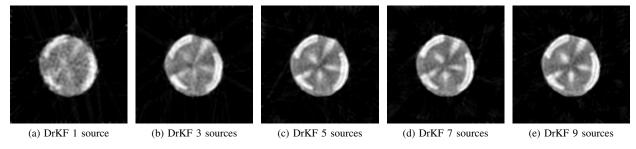


Fig. 8: DrKF reconstructions of the Reference B with acquisition geometry rotating by $\Delta/4$ degree between consecutive slices, where Δ is the angular difference between consecutive sources in the acquisition geometry.

VII. CONCLUSIONS

This work proposes a Kalman filtering method for reconstruction and an unsupervised clustering approach to spot density anomalies in the internal structure of objects. The internal 3D structure of the object is obtained by accumulating information from severely sparse angular sequential sampling in 2D, done as the object passed trough the X-ray scanner.

We have shown how the rotation of the measurement device plays a key role in the reconstruction quality. In particular we presented a realistic constant rotation speed scheme that maintained the same level of accuracy as the best theoretical scenario, namely a random angular incremental speed, which would be impractical for practical use. Furthermore, we saw that there is no need to use more then 7 sources if the


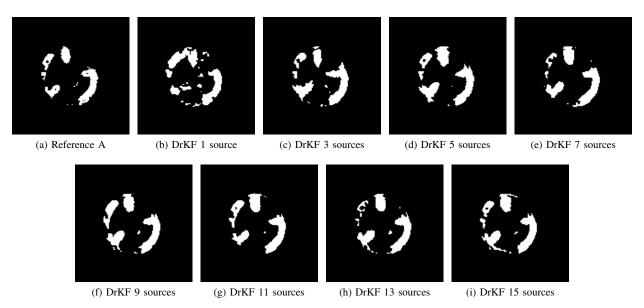


Fig. 9: Segmentations of the Reference A and the reconstructions presented in fig. 7

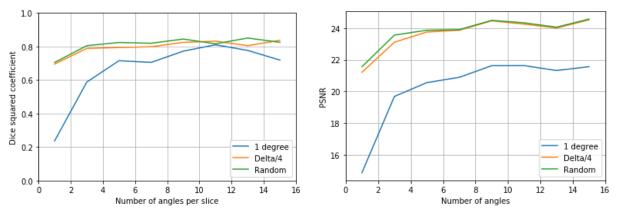

schemes. Reference segmentation obtained from the full angular FBP reconstruction. With \tilde{Z} set to 3.4 for number of angles smaller then 7 and 2.4 for the other cases.

(a) Comparison of the Dice squared coefficient for different acquisition (b) Comparison of the average PSNR for different acquisition schemes.

Fig. 10: Values obtained by averaging the coefficients in the block of 11 slices centred at Reference A.

acquisition scheme is designed properly and that one could achieve good results by using as little as 3 X-ray sources and a fairly simple measurement device. The unsupervised clustering approach used revealed to be robust against reconstruction noise. As the logs were not dried before the scanning process, the Dice coefficients presented in fig. 10 are significantly affected by the wet external part of the tree that get mixed with the wood knots given that they have very similar density of absorption. This could be overcome by spectral data due to different energy absorption coefficients and left as a possibility to investigate in future work.

Finally, an option to overcome the computational burden could be by extending the Kalman filtering framework in combination with learning based methods. For instance by replacing computational expensive parts with a neural network or intertwining model and data-driven components in the algorithm [40], [41]. Nevertheless, the nature of accumulating information between slices by a well chosen angular sampling is the essential part and needs to be carried over to the learning-based setting.

ACKNOWLEDGEMENTS

We thank Alessandro Laio for support and helpful discussions on the Segmentation by Density Peaks Advanced used within this study. Codes for the Kalman filtered reconstructions will be published after acceptance.

REFERENCES

[1] Leonardo De Chiffre, Simone Carmignato, J-P Kruth, Robert Schmitt, and Albert Weckenmann. Industrial applications of computed tomography. CIRP annals, 63(2):655-677, 2014.

- [2] Letitia Schoeman, Paul Williams, Anton du Plessis, and Marena Manley. X-ray micro-computed tomography (μct) for non-destructive characterisation of food microstructure. <u>Trends in Food Science & Technology</u>, 47:10–24, 2016.
- [3] M. d'Errico, E. Facco, A. Laio, and A. Rodriguez. Automatic topography of high-dimensional data sets by non-parametric density peak clustering. Information Sciences, 560:476–492, 2021.
- [4] F. Longuetaud, F. Mothe, B. Kerautret, A. Krähenbühl, L. Hory, J. Leban, and I. Debled-Rennesson. Automatic knot detection and measurements from x-ray CT images of wood: a review and validation of an improved algorithm on softwood samples. <u>Computers and Electronics</u> in Agriculture, 85:77—89, 2012.
- [5] E. Johansson, D. Johansson, J. Skog, and M. Fredriksson. Automated knot detection for high speed computed tomography on *pinus sylvestris l.* and *picea abies* (l.) karst. using ellipse fitting in concentric surfaces. Computers and Electronics in Agriculture, 96:238–245, 2013.
- [6] Bernadette N Hahn. Efficient algorithms for linear dynamic inverse problems with known motion. <u>Inverse Problems</u>, 30(3):035008, 2014.
- [7] Bernadette N Hahn. Motion compensation strategies in tomography. In Time-Dependent Problems in Imaging and Parameter Identification, pages 51–83. Springer, 2021.
- [8] Esa Niemi, Matti Lassas, Aki Kallonen, Lauri Harhanen, Keijo Hämäläinen, and Samuli Siltanen. Dynamic multi-source x-ray tomography using a spacetime level set method. <u>Journal of Computational</u> <u>Physics</u>, 291:218–237, 2015.
- [9] Martin Burger, Hendrik Dirks, Lena Frerking, Andreas Hauptmann, Tapio Helin, and Samuli Siltanen. A variational reconstruction method for undersampled dynamic x-ray tomography based on physical motion models. <u>Inverse Problems</u>, 33(12):124008, 2017.
- [10] Andreas Hauptmann, Ozan Öktem, and Carola Schönlieb. Image reconstruction in dynamic inverse problems with temporal models. In Handbook of Mathematical Models and Algorithms in Computer Vision and Imaging: Mathematical Imaging and Vision, pages 1–31. Springer, 2021
- [11] Lynn T Tanoue, Nichole T Tanner, Michael K Gould, and Gerard A Silvestri. Lung cancer screening. <u>American journal of respiratory and critical care medicine</u>, 191(1):19–33, 2015.
- [12] Jonas Adler, Sebastian Lunz, Olivier Verdier, Carola-Bibiane Schönlieb, and Ozan Öktem. Task adapted reconstruction for inverse problems. Inverse Problems, 2021.
- [13] Yoeri E Boink, Srirang Manohar, and Christoph Brune. A partially-learned algorithm for joint photo-acoustic reconstruction and segmentation. <u>IEEE transactions on medical imaging</u>, 39(1):129–139, 2019.
- [14] Simon Arridge, Pascal Fernsel, and Andreas Hauptmann. Joint reconstruction and low-rank decomposition for dynamic inverse problems. Inverse Problems & Imaging, 2021.
- [15] A. C. Kak and M. Slaney. <u>Principles of Computerized Tomographic Imaging</u>. Society of Industrial and Applied Mathematics, <u>Philadelphia</u>, 2001.
- [16] Jennifer L Mueller and Samuli Siltanen. <u>Linear and nonlinear inverse</u> problems with practical applications. SIAM, 2012.
- [17] Otmar Scherzer, Markus Grasmair, Harald Grossauer, Markus Haltmeier, and Frank Lenzen. Variational methods in imaging. 2009.
- [18] Leonid I Rudin, Stanley Osher, and Emad Fatemi. Nonlinear total variation based noise removal algorithms. <u>Physica D: nonlinear phenomena</u>, 60(1-4):259–268, 1992.
- [19] Antonin Chambolle and Thomas Pock. A first-order primal-dual algorithm for convex problems with applications to imaging. <u>Journal</u> of mathematical imaging and vision, 40(1):120–145, 2011.
- [20] Ingrid Daubechies, Michel Defrise, and Christine De Mol. An iterative thresholding algorithm for linear inverse problems with a sparsity constraint. Communications on Pure and Applied Mathematics: A Journal Issued by the Courant Institute of Mathematical Sciences, 57(11):1413– 1457, 2004.
- [21] Sebastian Lunz, Ozan Öktem, and Carola-Bibiane Schönlieb. Adversarial regularizers in inverse problems. <u>Advances in neural information</u> processing systems, 31, 2018.
- [22] J. Hakkarainen, Z. Purisha, A. Solonen, and S. Siltanen. Undersampled dynamic x-ray tomography with dimension reduction Kalman filter. IEEE Transactions on Computational Imaging, 5(3):492–501, 2019.
- [23] A. Solonen, T. Cui, J. Hakkarainen, and Y. Marzouk. On dimension reduction in Gaussian filters. Inverse Problems, 32(4):045003, 2016.
- [24] P. Hagman and S. Grundberg. Classification of scots pine (pinus sylvestris) knots in density images from CT scanned logs. <u>European</u> Journal of Wood and Wood Products, 53:75—81, 1995.

- [25] J. P. Andreu and A. Rinnhofer. Modeling of internal defects in logs for value optimization based on industrial CT scanning. In A. Rinnhofer, editor, Fifth International Conference on Image Processing and Scanning of Wood, Bad Waltersdorf, Austria, pages 141—150, 2003.
- [26] R. Baumgartner, F. Brüchert, and U. Sauter. Knots in CT scans of scots pine logs. In D. Ridley-Ellis and J. Moore, editors, <u>The Future of Quality Control for Wood & Wood Products</u>, <u>The Final Conference of COST Action E53</u>, Edinburgh, Scotland, 2010.
- [27] O. Hagman and J. Nyström. Resin pocket detection on surfaces and in 3-d volumes of Norway spruce. In A. Rinnhofer, editor, <u>Proceedings of the Fifth International Conference on Image Processing and Scanning of Wood, Joanneum research Forschungsgesellshaft mbH</u>, pages 171—176, 2003.
- [28] U. Nordmark. Knot identification from CT images of young pinus sylvestris sawlogs using artificial neural networks. <u>Scandinavian Journal</u> of Forest Research, 17:72—78, 2002.
- [29] C. Todoroki, E. Lowell, and D. Dykstra. Automated knot detection with visual post-processing of Douglas-fir veneer images. <u>Computers and</u> Electronics in Agriculture, 70:163–171, 2010.
- [30] T. Gergel, T. Bucha, M. Gejdoš, and Z. Vyhnáliková. Computed tomography log scanning – high technology for forestry and forest based industry. Central European Forestry Journal, 65:51–59, 2019.
- [31] A. Rodriguez, M. d'Errico, E. Facco, and A. Laio. Computing the free energy without collective variables. <u>Journal of Chemical Theory and</u> Computation, 14(3):1206–1215, 2018.
- [32] A. Rodriguez and A. Laio. Clustering by fast search and find of density peaks. Science, 344(6191):1492–1496, 2014.
- [33] Aldo Glielmo, Iuri Macocco, Diego Doimo, Matteo Carli, Claudio Zeni, Romina Wild, Maria d'Errico, Alex Rodriguez, and Laio Alessandro. DADApy: Distance-based Analysis of DAta-manifolds in Python. arXiv preprint arXiv:2205.03373, 2022.
- [34] Finnos oy. https://www.finnos.fi. Accessed: 2022-02-21.
- [35] J. Adler, H. Kohr, and O. Öktem. Operator discretization library (ODL), 2017.
- [36] W. Van Aarle, W.-J. Palenstijn, J. Cant, E. Janssens, F. Bleichrodt, A. Dabravolski, J. De Beenhouwer, K. J. Batenburg, and J. Sijbers. Fast and flexible x-ray tomography using the astra toolbox. <u>Optics express</u>, 24(22):25129–25147, 2016.
- [37] Kamisetty Ramam Rao and Patrick C Yip. The transform and data compression handbook. CRC press, 2018.
- [38] Aaron Carass, Snehashis Roy, Adrian Gherman, Jacob C. Reinhold, Andrew Jesson, Tal Arbel, Oskar Maier, Heinz Handels, Mohsen Ghafoorian, Bram Platel, Ariel Birenbaum, Hayit Greenspan, Dzung L. Pham, Ciprian M. Crainiceanu, Peter A. Calabresi, Jerry L. Prince, William R. Gray Roncal, Russell T. Shinohara, and Ipek Oguz. Evaluating white matter lesion segmentations with refined sørensen-dice analysis. Scientific reports, 10(8242), 2020.
- [39] Martin Burger, Andreas Hauptmann, Tapio Helin, Nuutti Hyvönen, and Juha-Pekka Puska. Sequentially optimized projections in x-ray imaging. Inverse Problems, 37(7):075006, 2021.
- [40] Arttu Arjas, Erwin J Alles, Efthymios Maneas, Simon Arridge, Adrien Desjardins, Mikko J Sillanpää, and Andreas Hauptmann. Neural network kalman filtering for 3d object tracking from linear array ultrasound data. IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, 2022.
- [41] Guy Revach, Nir Shlezinger, Xiaoyong Ni, Adria Lopez Escoriza, Ruud JG Van Sloun, and Yonina C Eldar. Kalmannet: Neural network aided kalman filtering for partially known dynamics. <u>IEEE Transactions</u> on Signal Processing, 70:1532–1547, 2022.