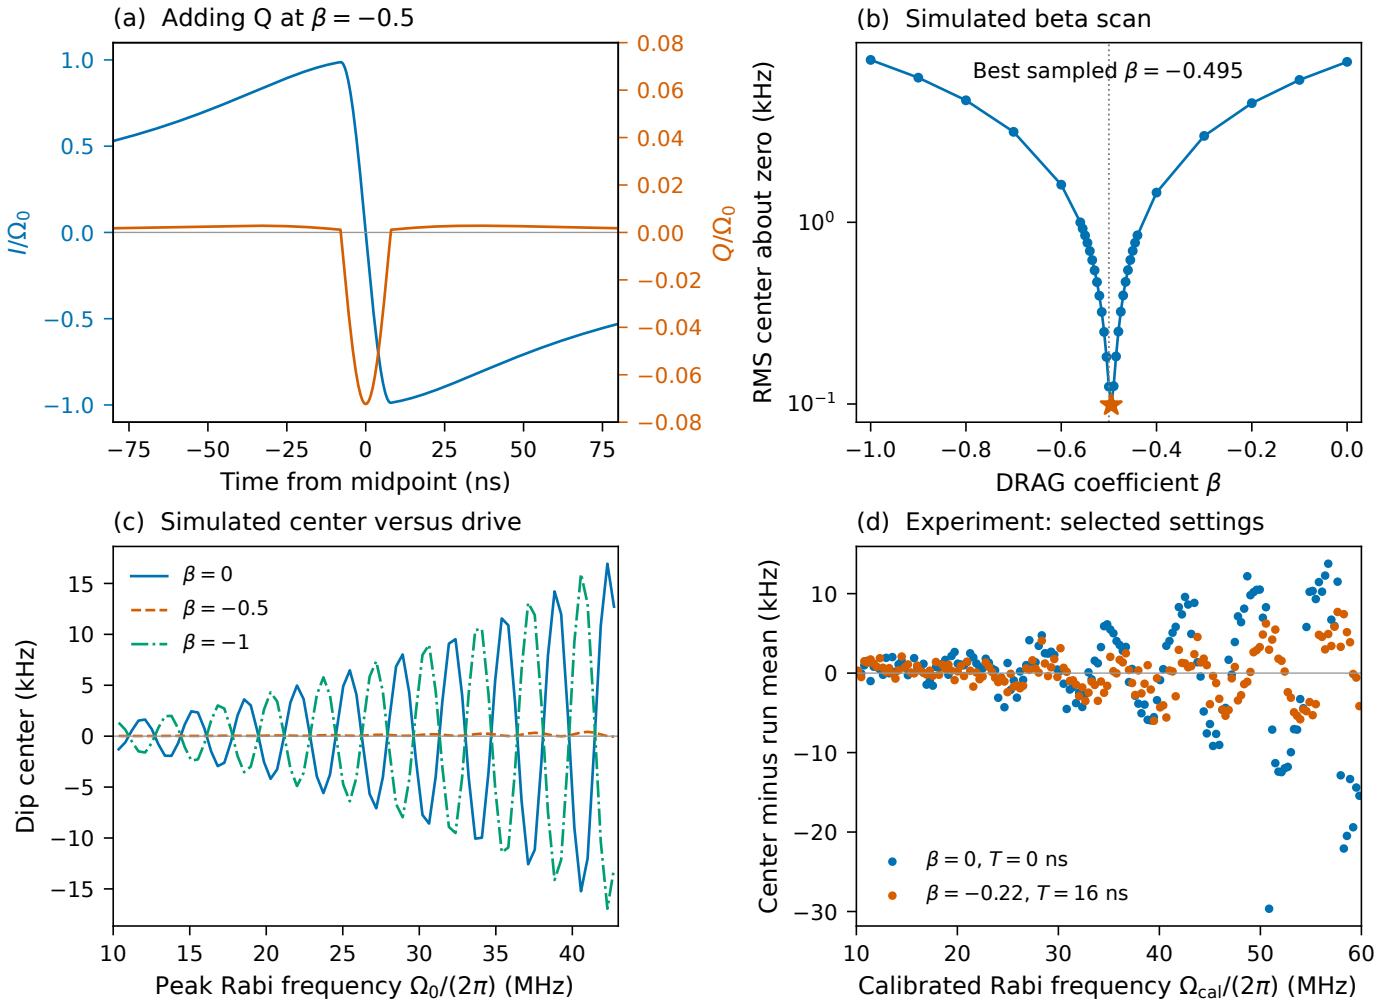
(a) Adding Q at $\beta = -0.5$
I/Ω_0
Q/Ω_0
Time from midpoint (ns)
(b) Simulated beta scan
Best sampled $\beta = -0.495$
RMS center about zero (kHz)
DRAG coefficient β
(c) Simulated center versus drive
$\beta = 0$
$\beta = -0.5$
$\beta = -1$
Dip center (kHz)
Peak Rabi frequency $\Omega_0/(2\pi)$ (MHz)
(d) Experiment: selected settings
$\beta = 0$, $T = 0$ ns
$\beta = -0.22$, $T = 16$ ns
Center minus run mean (kHz)
Calibrated Rabi frequency $\Omega_{cal}/(2\pi)$ (MHz)