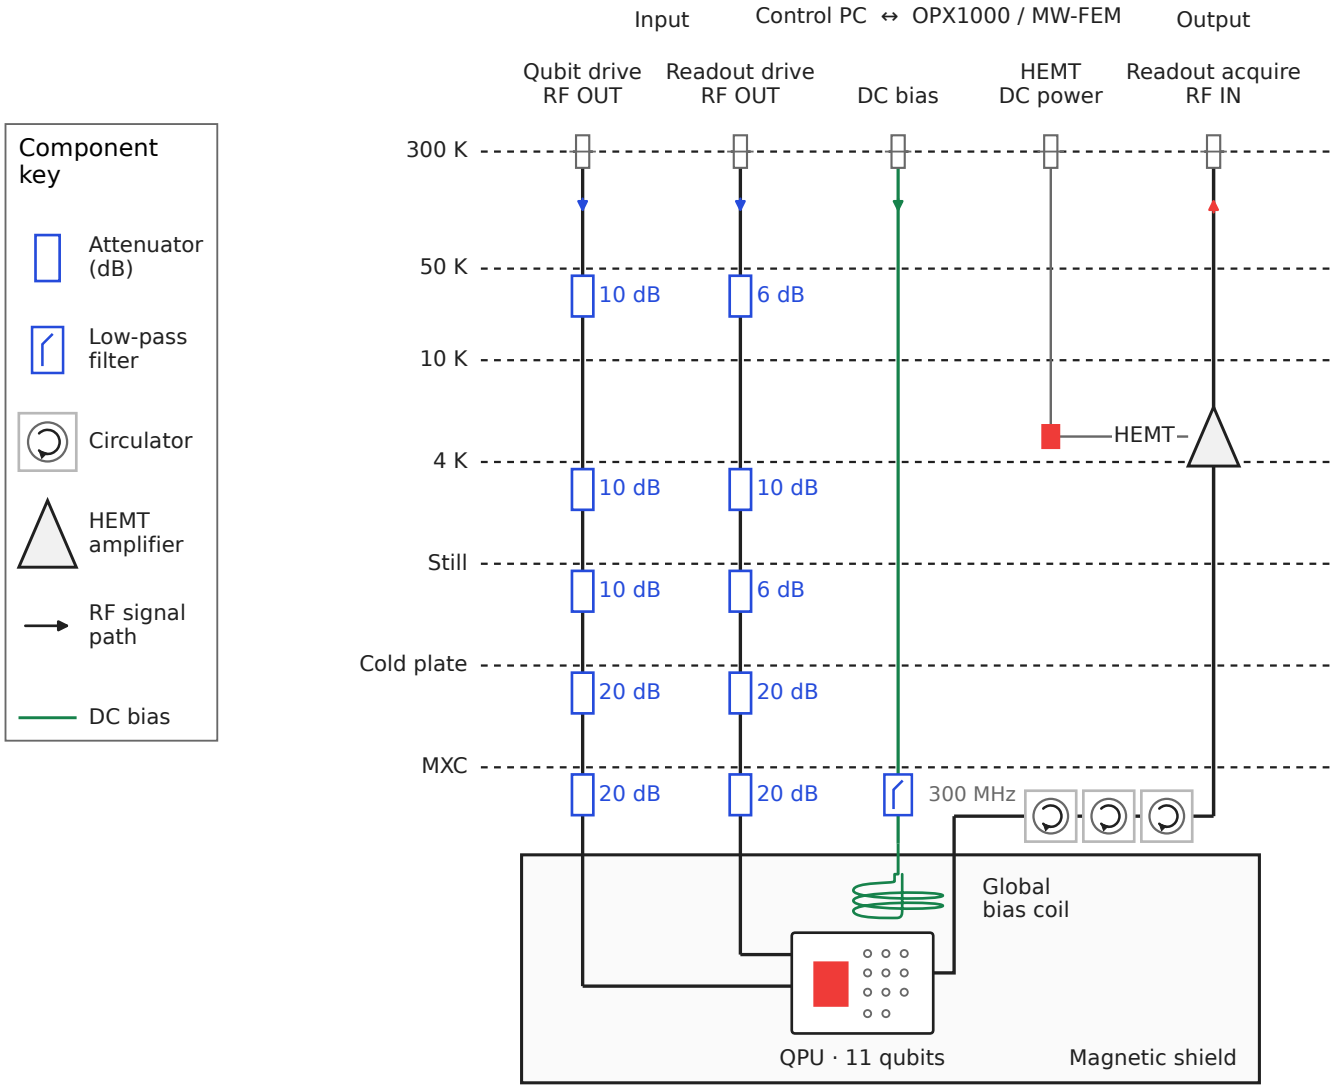
Component key
Attenuator (dB)
Low-pass filter
Circulator
HEMT amplifier
RF signal path
DC bias
Input
Control PC ↔ OPX1000 / MW-FEM
Output
Qubit drive RF OUT
Readout drive RF OUT
DC bias
HEMT DC power
Readout acquire RF IN
300 K
50 K
10 K
4 K
Still
Cold plate
MXC
10 dB
6 dB
10 dB
10 dB
10 dB
6 dB
20 dB
20 dB
20 dB
20 dB
HEMT
300 MHz
Global bias coil
QPU · 11 qubits
Magnetic shield