


3) – per-tap WS2812 LED + pushbutton, no MCU.
the full LED=addressing / button=ladder scheme.

2 THT 'pixel' module (wire leads, not a solderable chip).
D/DIN/DOUT is a common convention for these modules –
inst the actual part's leads/silkscreen before wiring.

a–in series resistor (330R, standard WS2812 practice).
der resistor (1k) – SAME value at every tap, see README.
nnects the ladder wire to GND at this tap's position –
s see this tap's R2 in series, giving each tap a distinct
nce (R,2R,3R,4R,5R) for KegStation's ADC to decode.

ostream/KegStation), J2 = OUT (to next tap downstream).
body, 4 contacts) – footprint assigned in generate_pcb.py.
nector convention as KegSensor's RJ11/RJ14 jack.
are NOT symmetric – a swapped IN/OUT cable breaks this
downstream of it (known/accepted regression, see README).

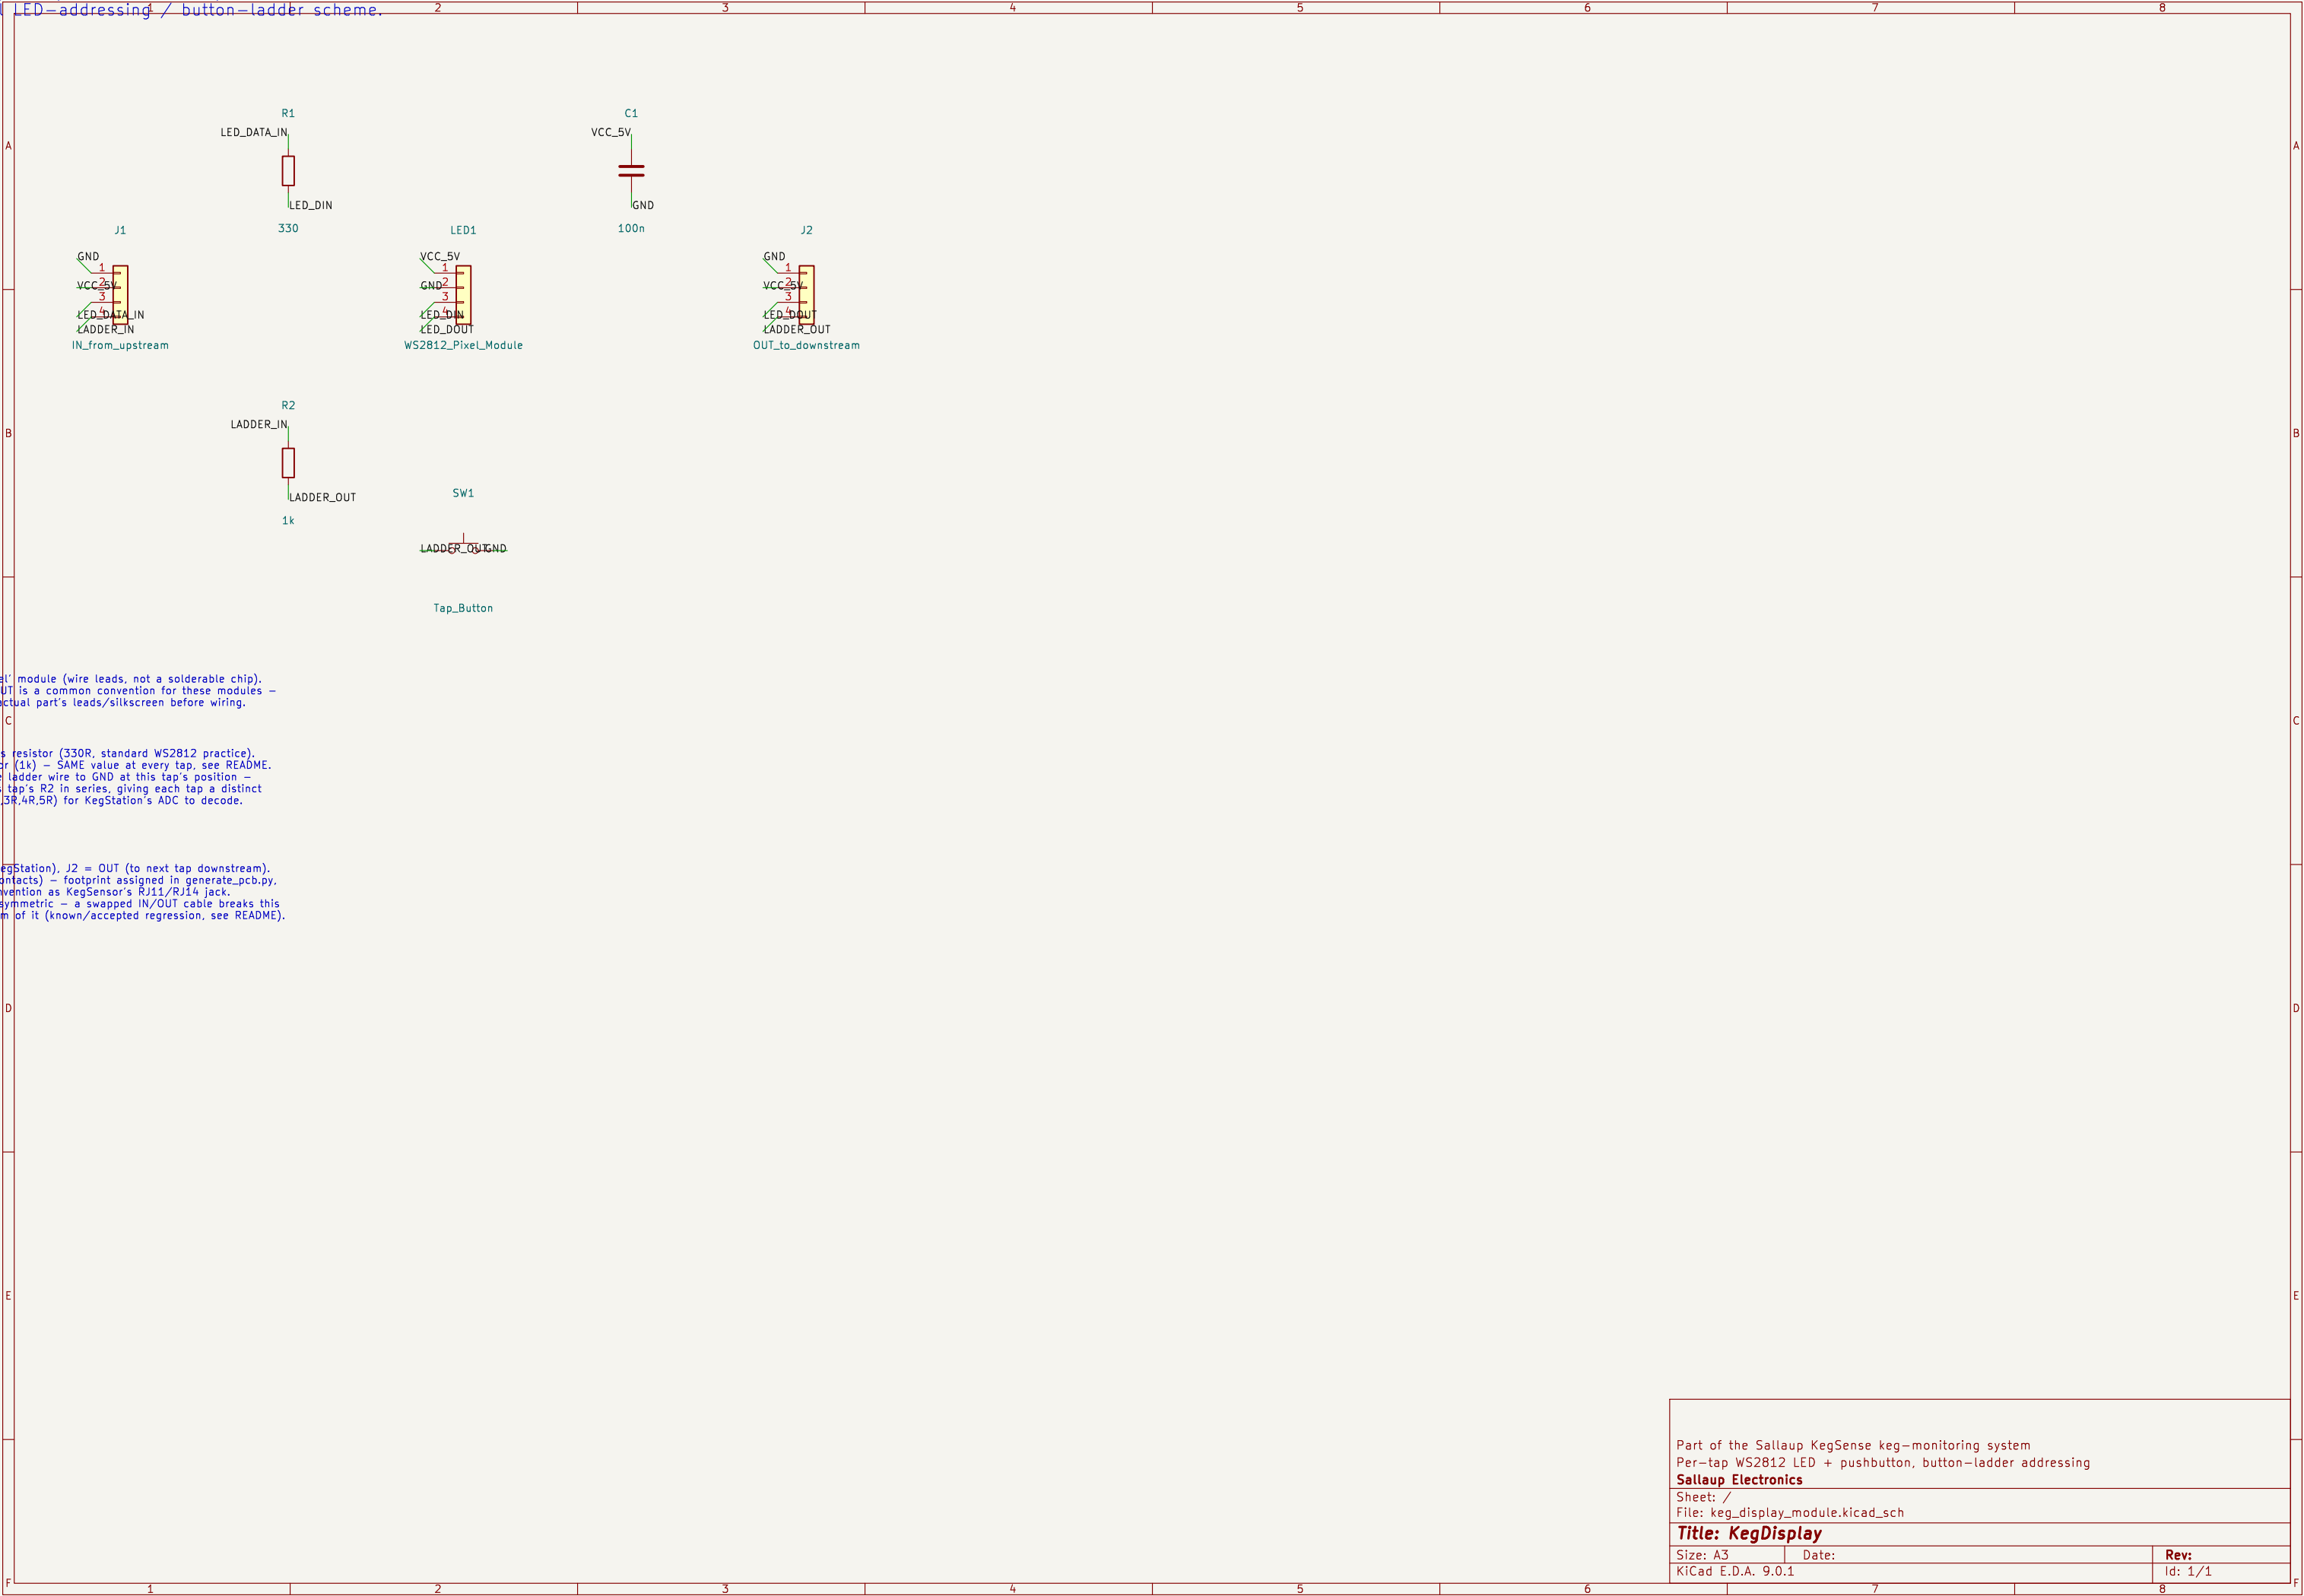

Part of the Sallaup KegSense keg-monitoring system
Per-tap WS2812 LED + pushbutton, button-ladder addressing
Sallaup Electronics
Sheet: /
File: keg_display_module.kicad_sch

Title: KegDisplay		
Size: A3	Date:	Rev:
KiCad E.D.A. 9.0.1		Id: 1/1