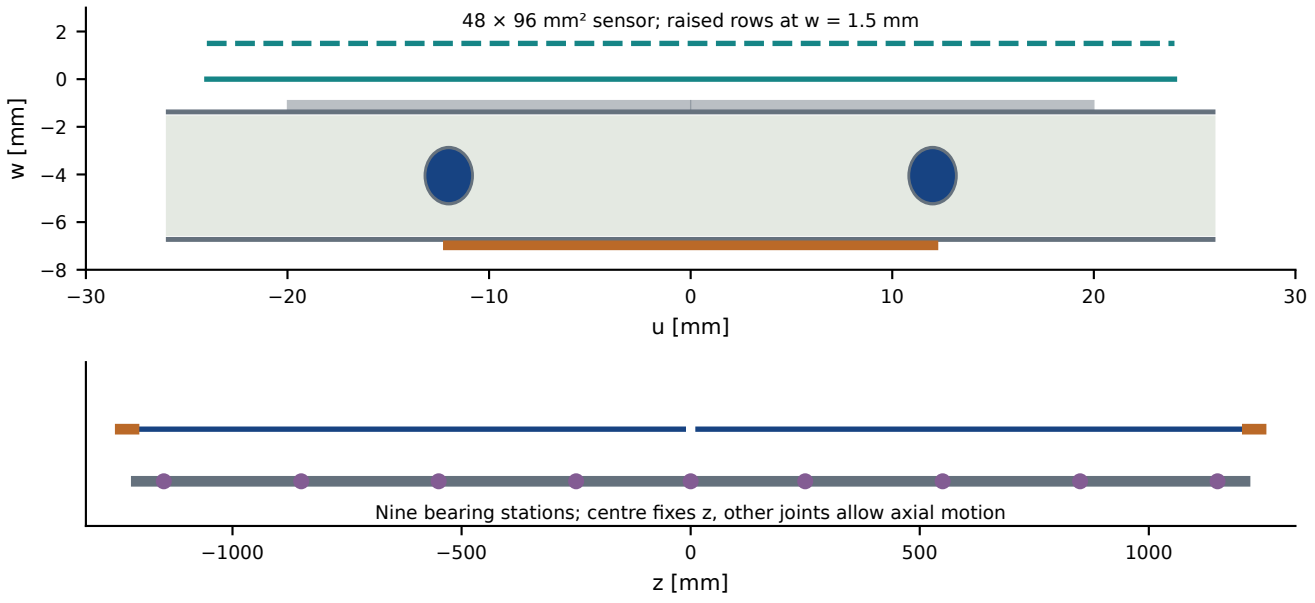
48 × 96 mm² sensor; raised rows at w = 1.5 mm
w [mm]
u [mm]
Nine bearing stations; centre fixes z, other joints allow axial motion
z [mm]