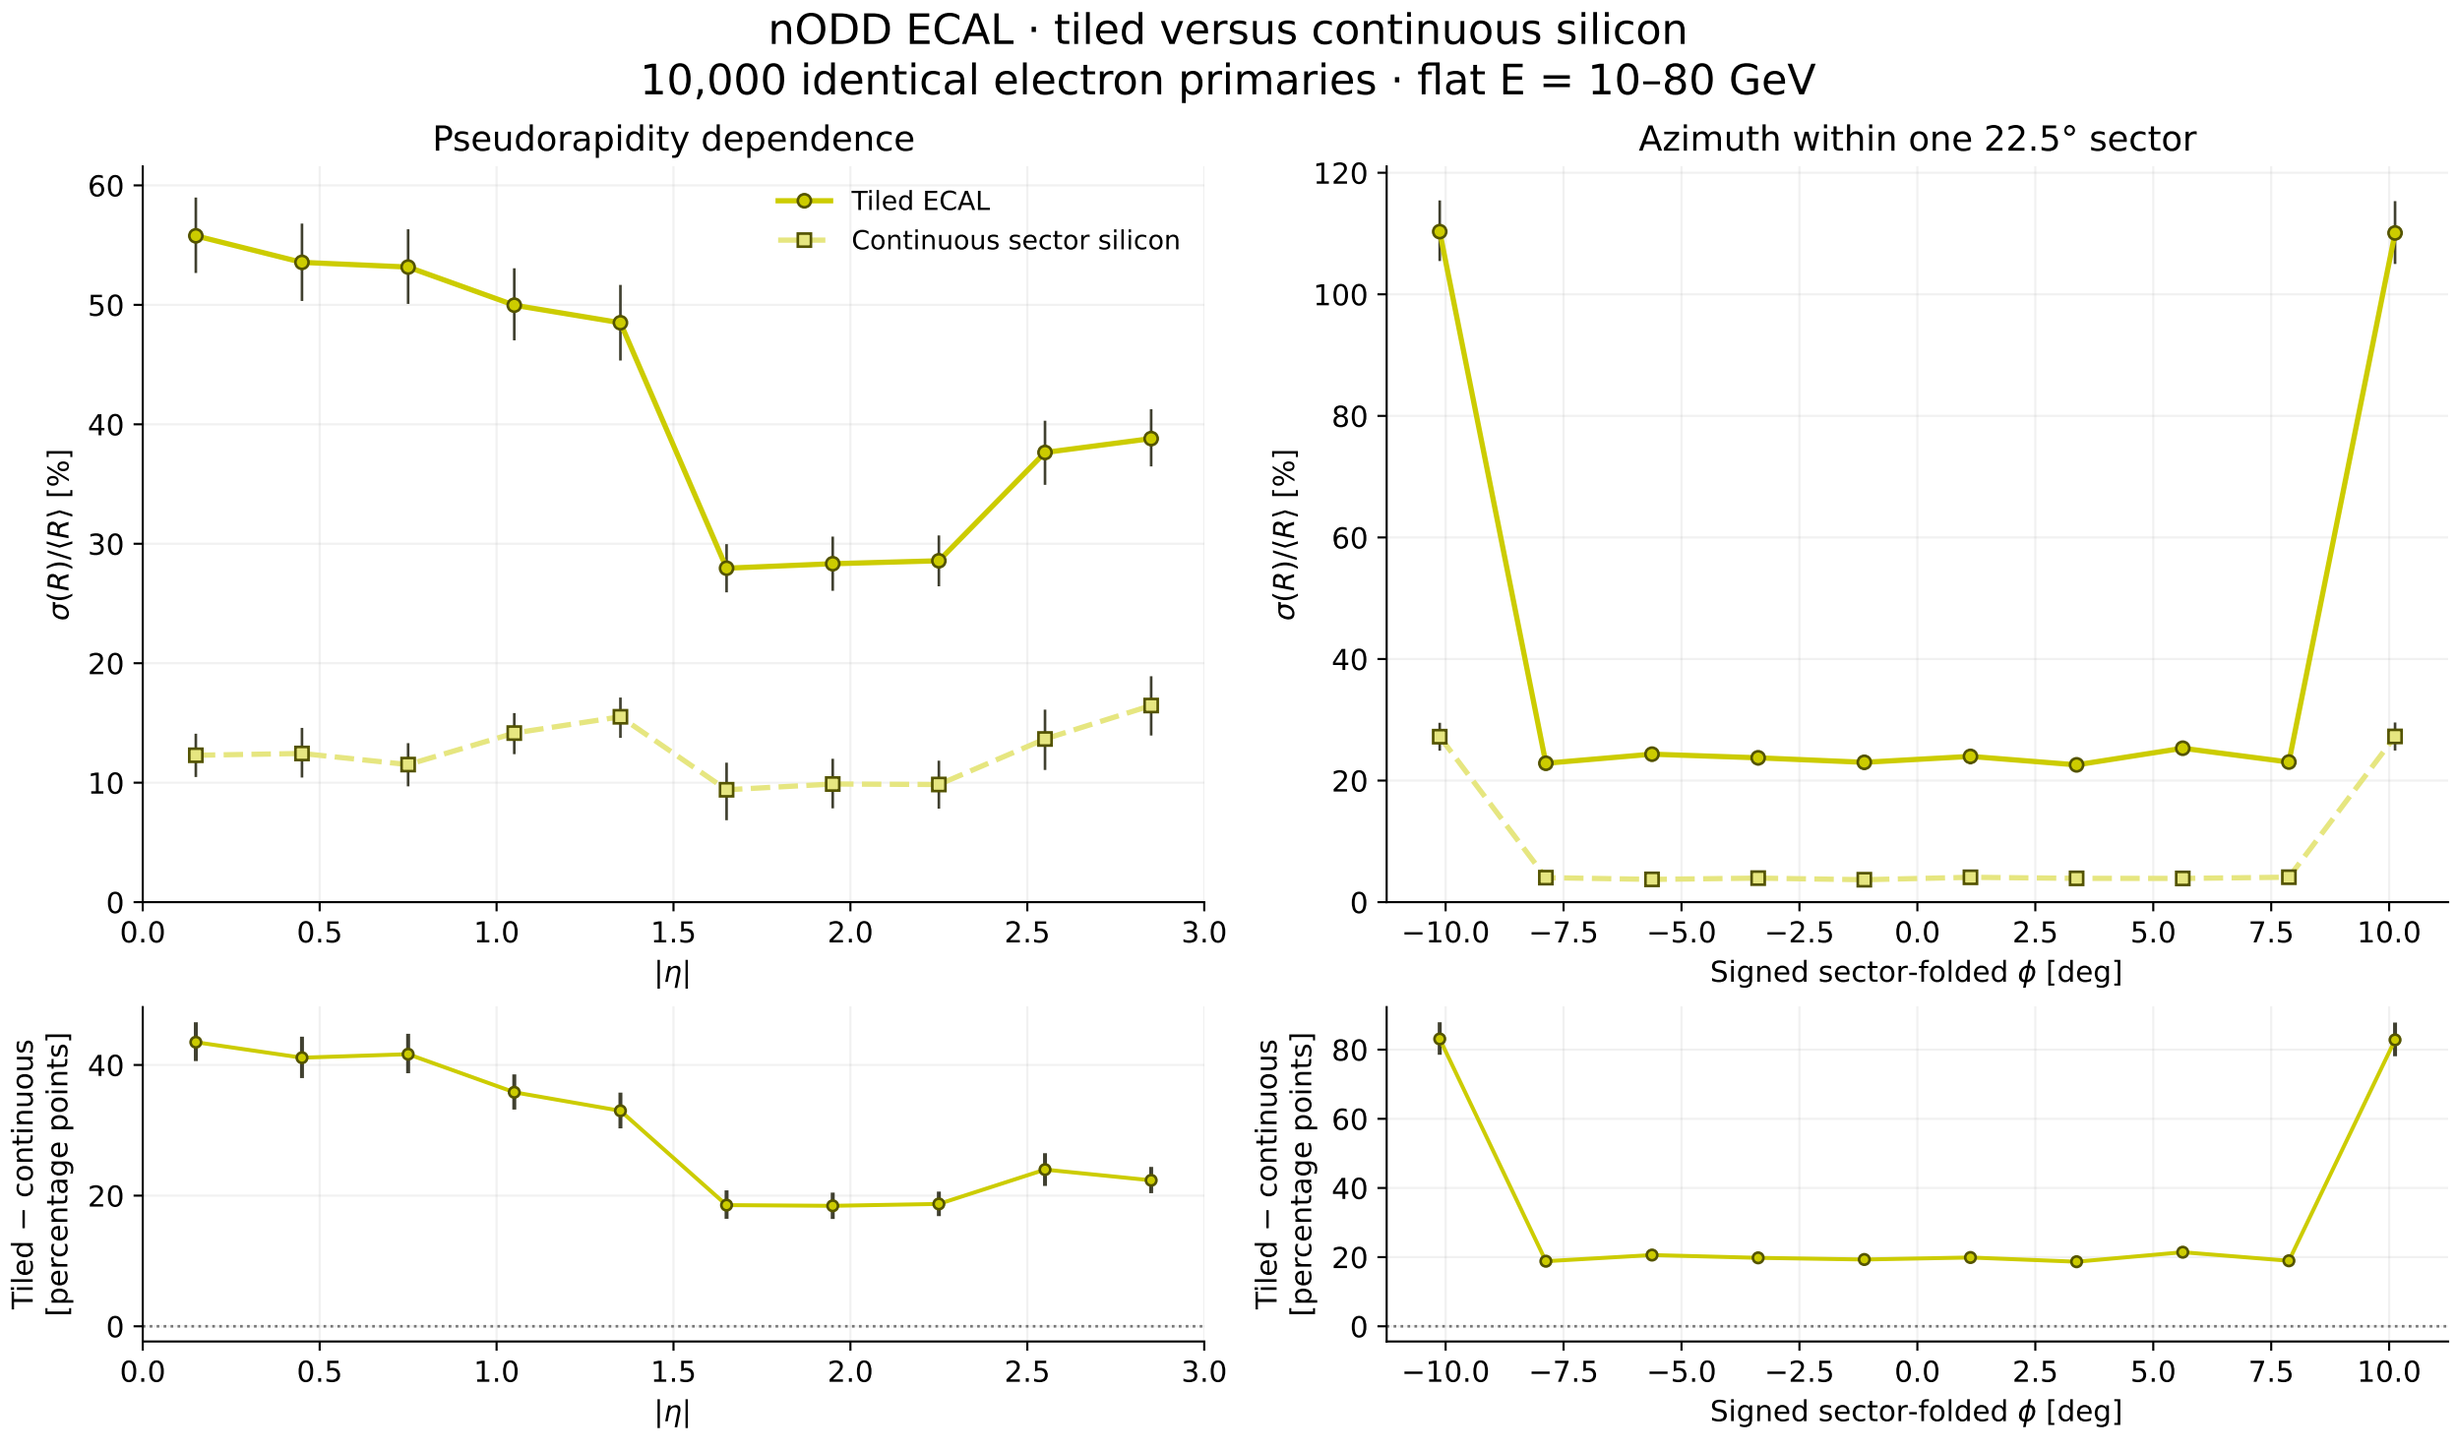
nODD ECAL · tiled versus continuous silicon
10,000 identical electron primaries · flat E = 10–80 GeV
Pseudorapidity dependence
Azimuth within one 22.5° sector
Tiled ECAL
Continuous sector silicon
σ(R)/⟨R⟩ [%]
|η|
Signed sector-folded ϕ [deg]
Tiled − continuous [percentage points]
R = silicon energy / true energy · All events retained · 95% paired whole-event bootstrap intervals
Raw response width; full-sector control fills module, guard and service-margin losses together