

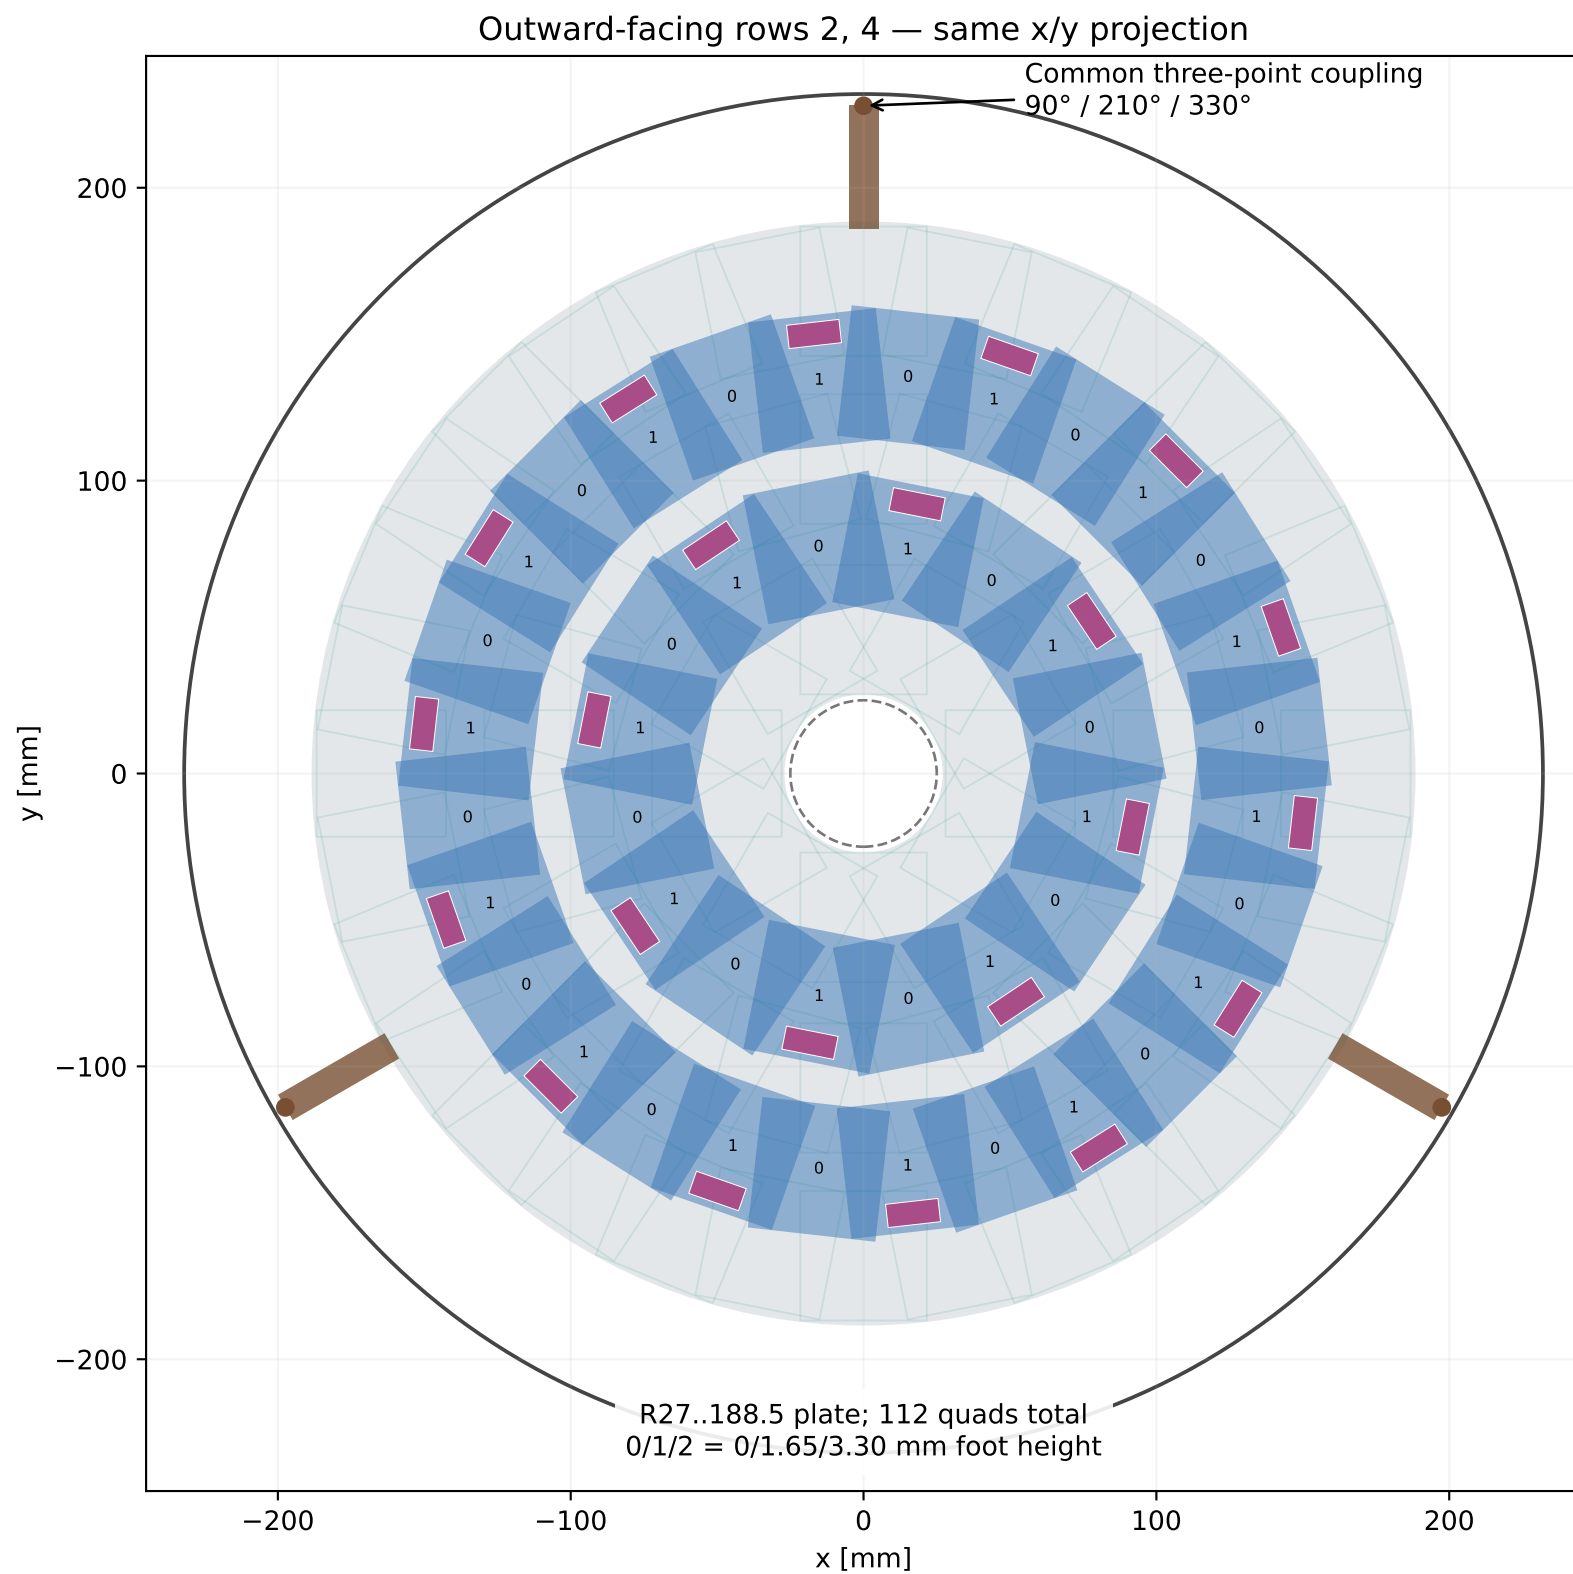


nODD / DES-014 / Common disc: module faces and mounting points

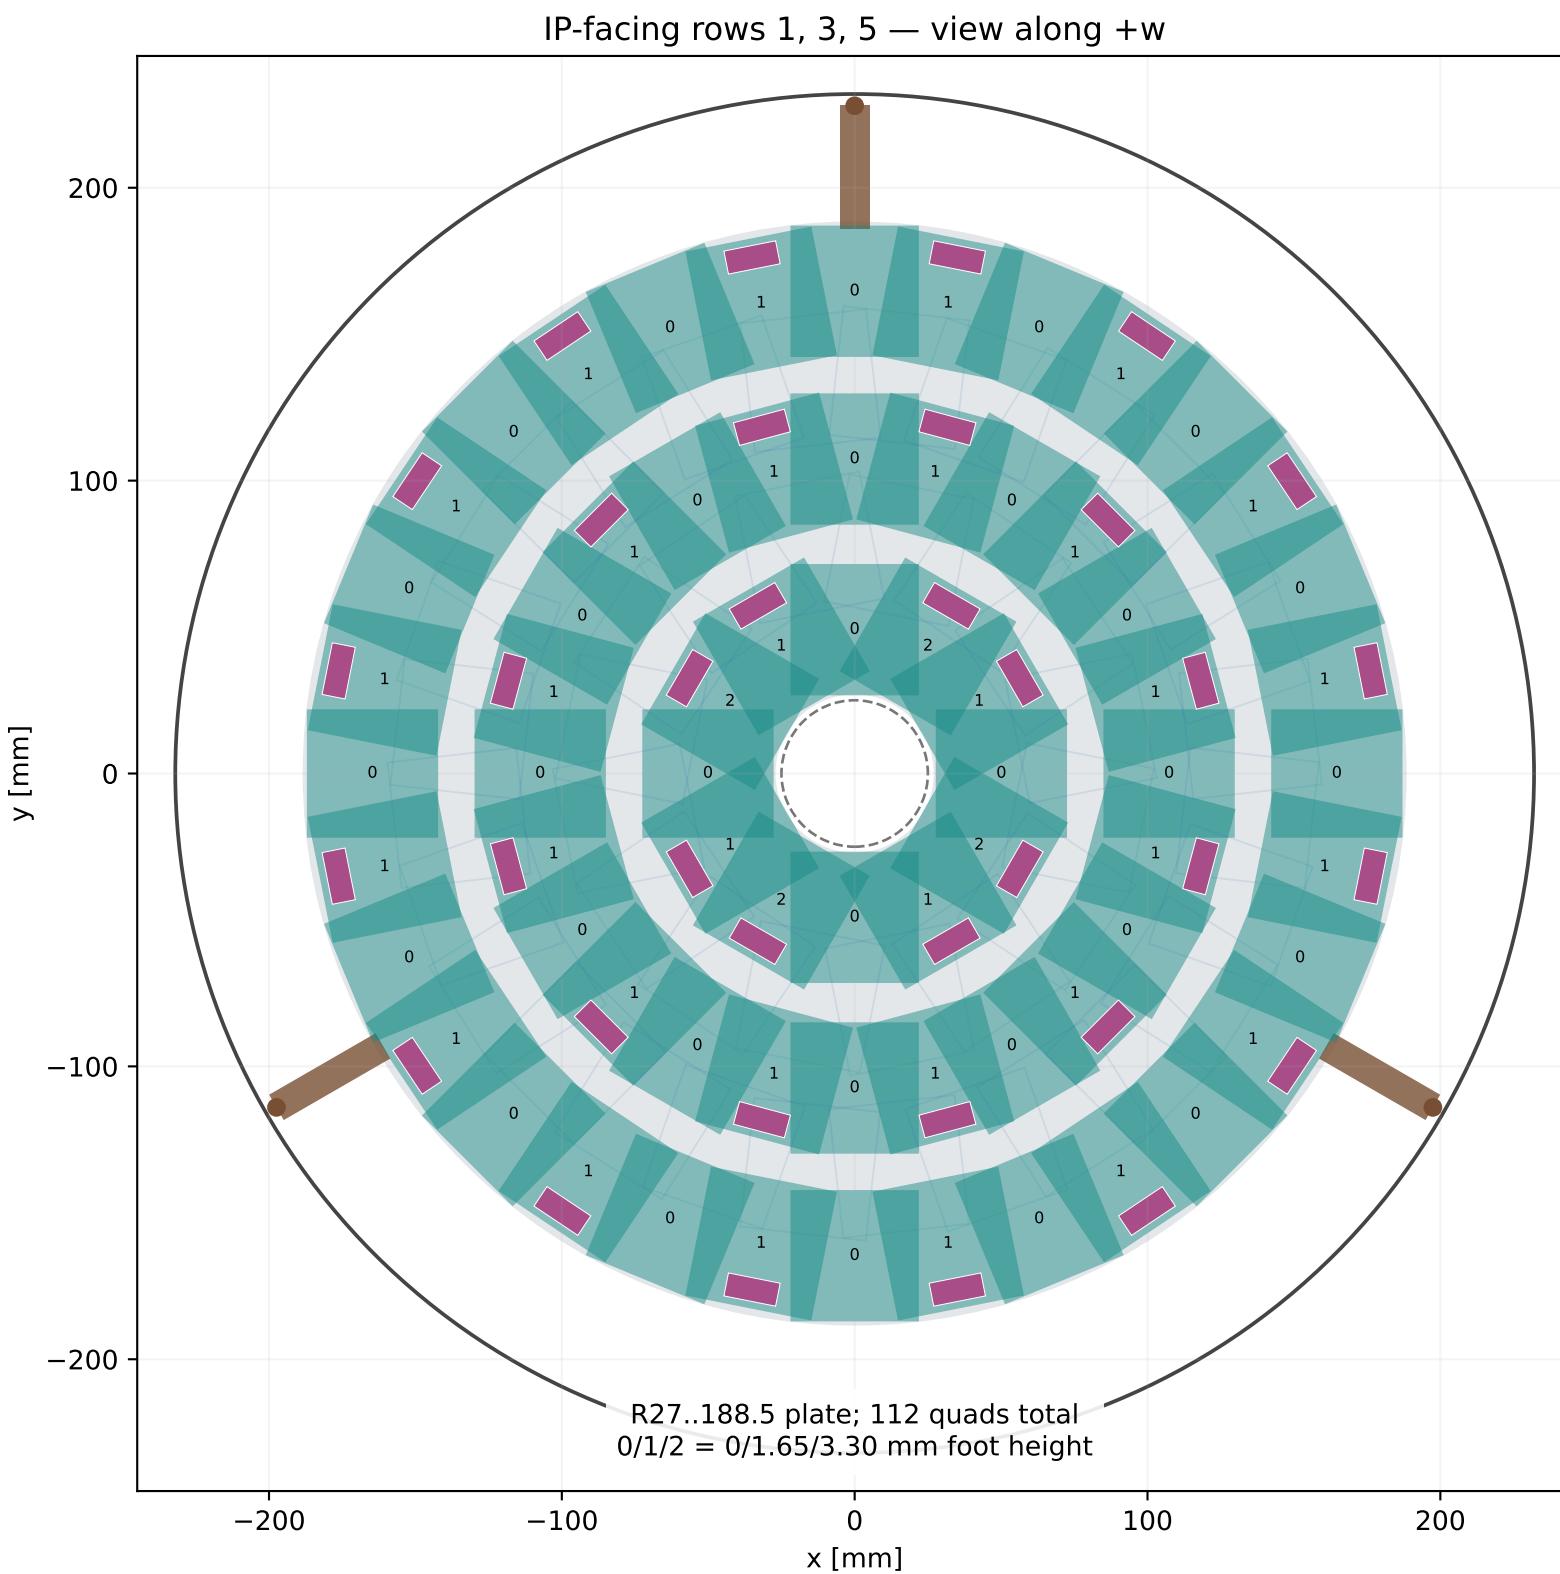


nODD / DES-014 / Local support sections and staggering



Actual r-w section at $\phi = 0^\circ$; w scale enlarged for visibility

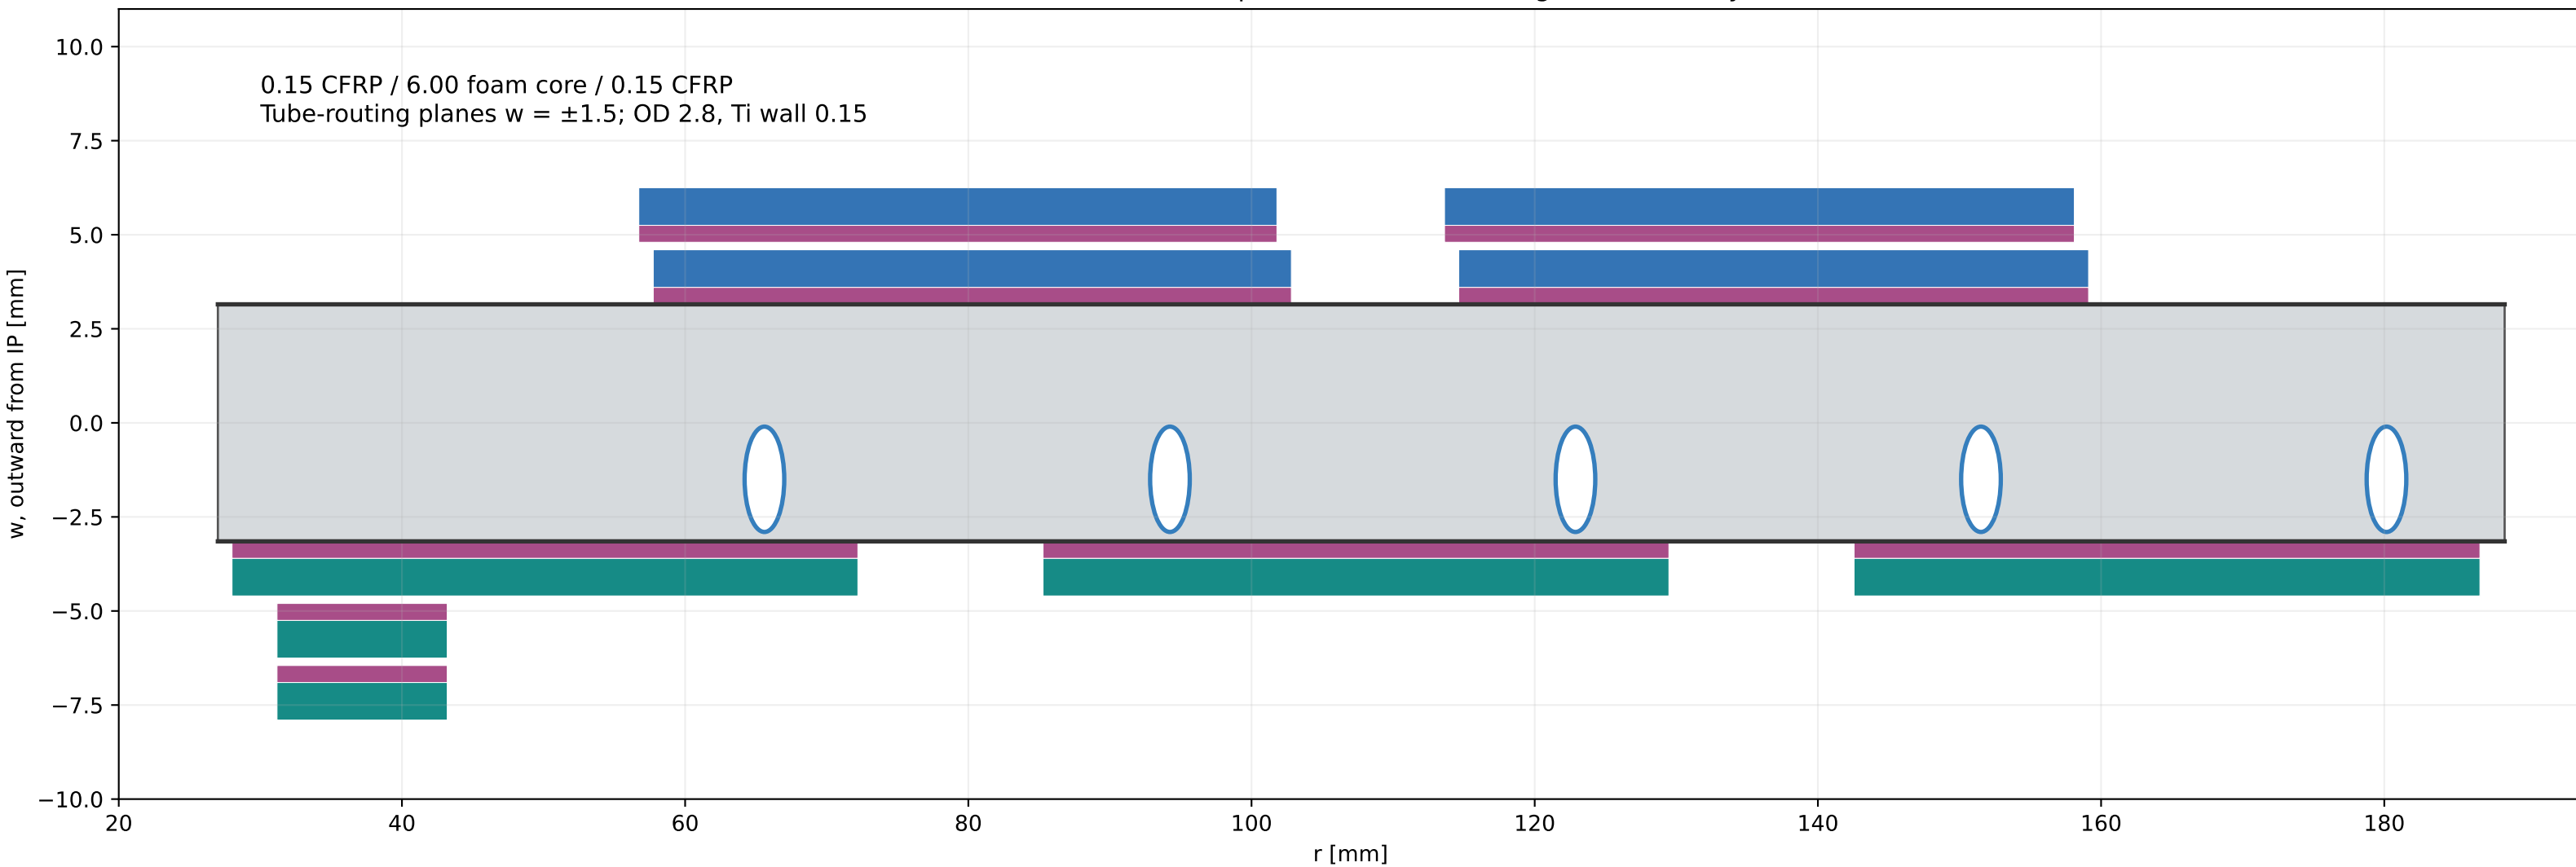

Reusable foot heights and a direct graphite-to-tube thermal path (schematic)

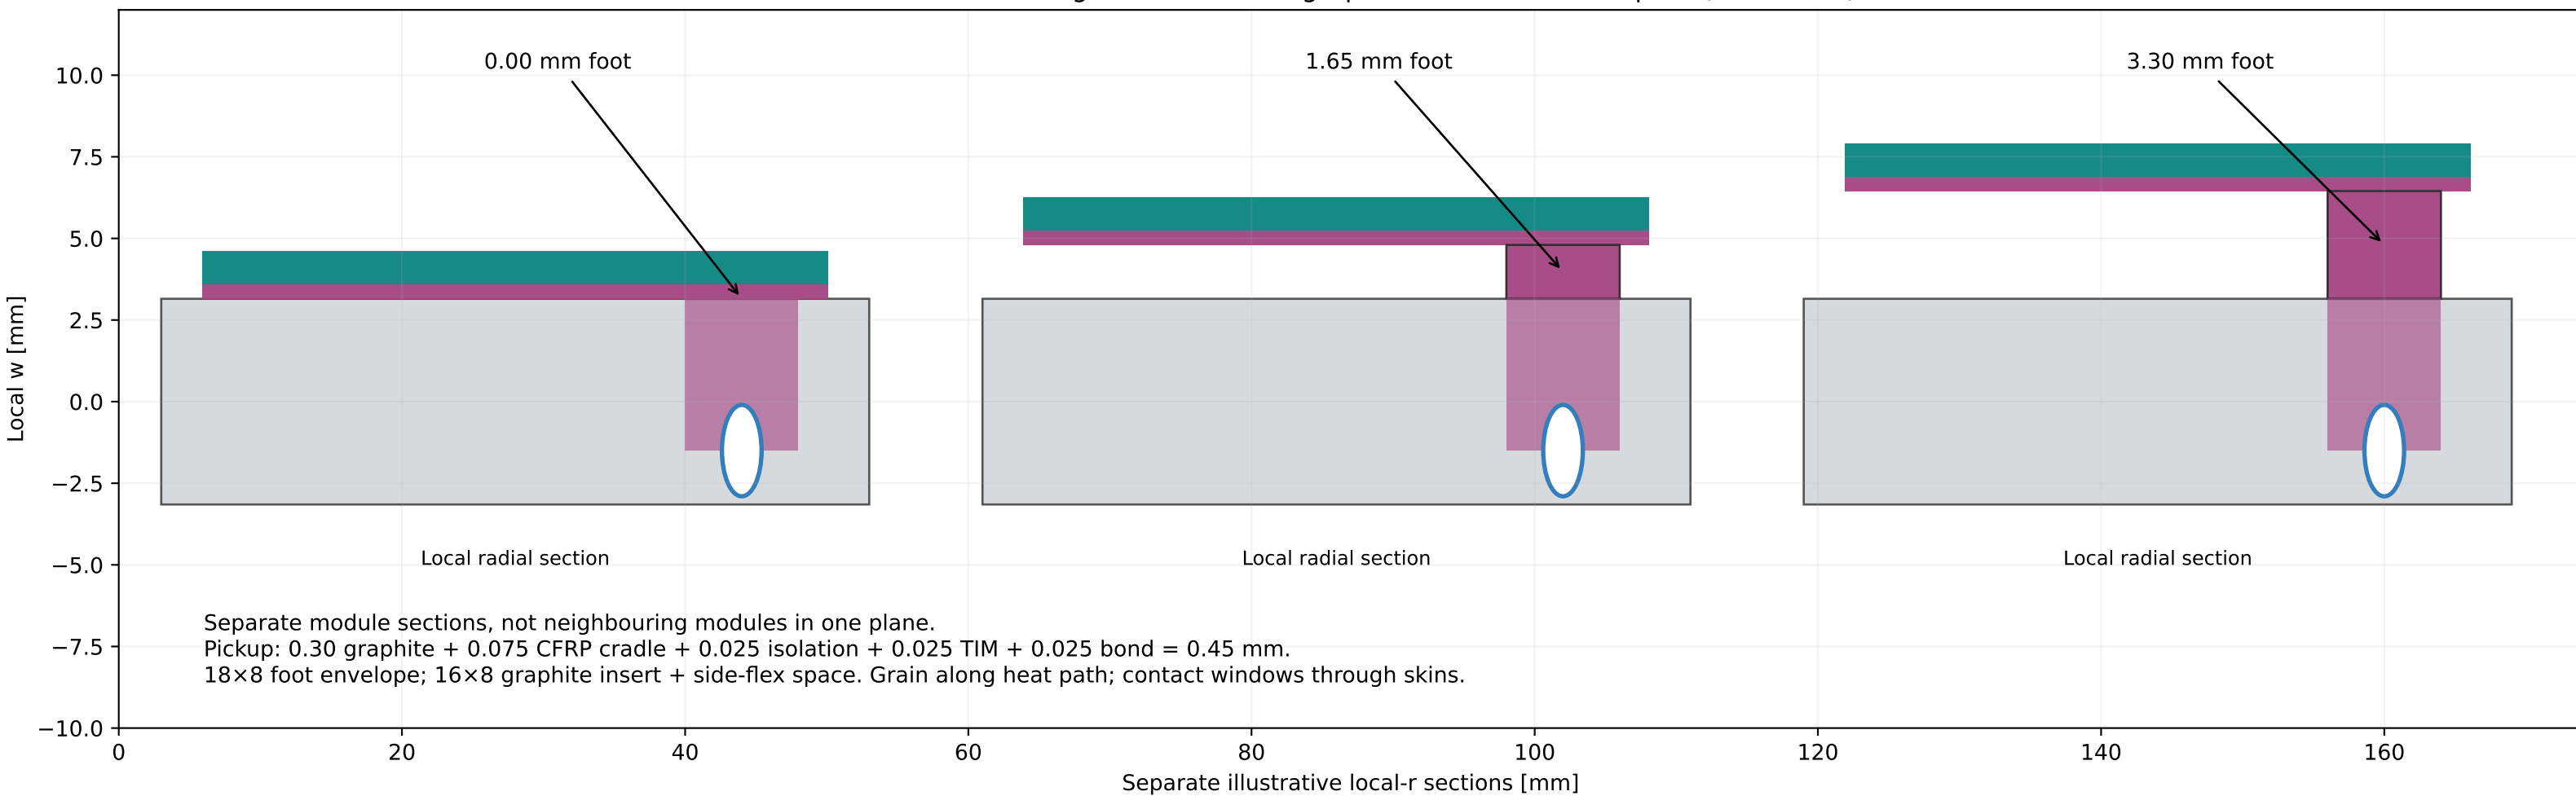


nODD / DES-014 / Cooling and cable hand-off concept

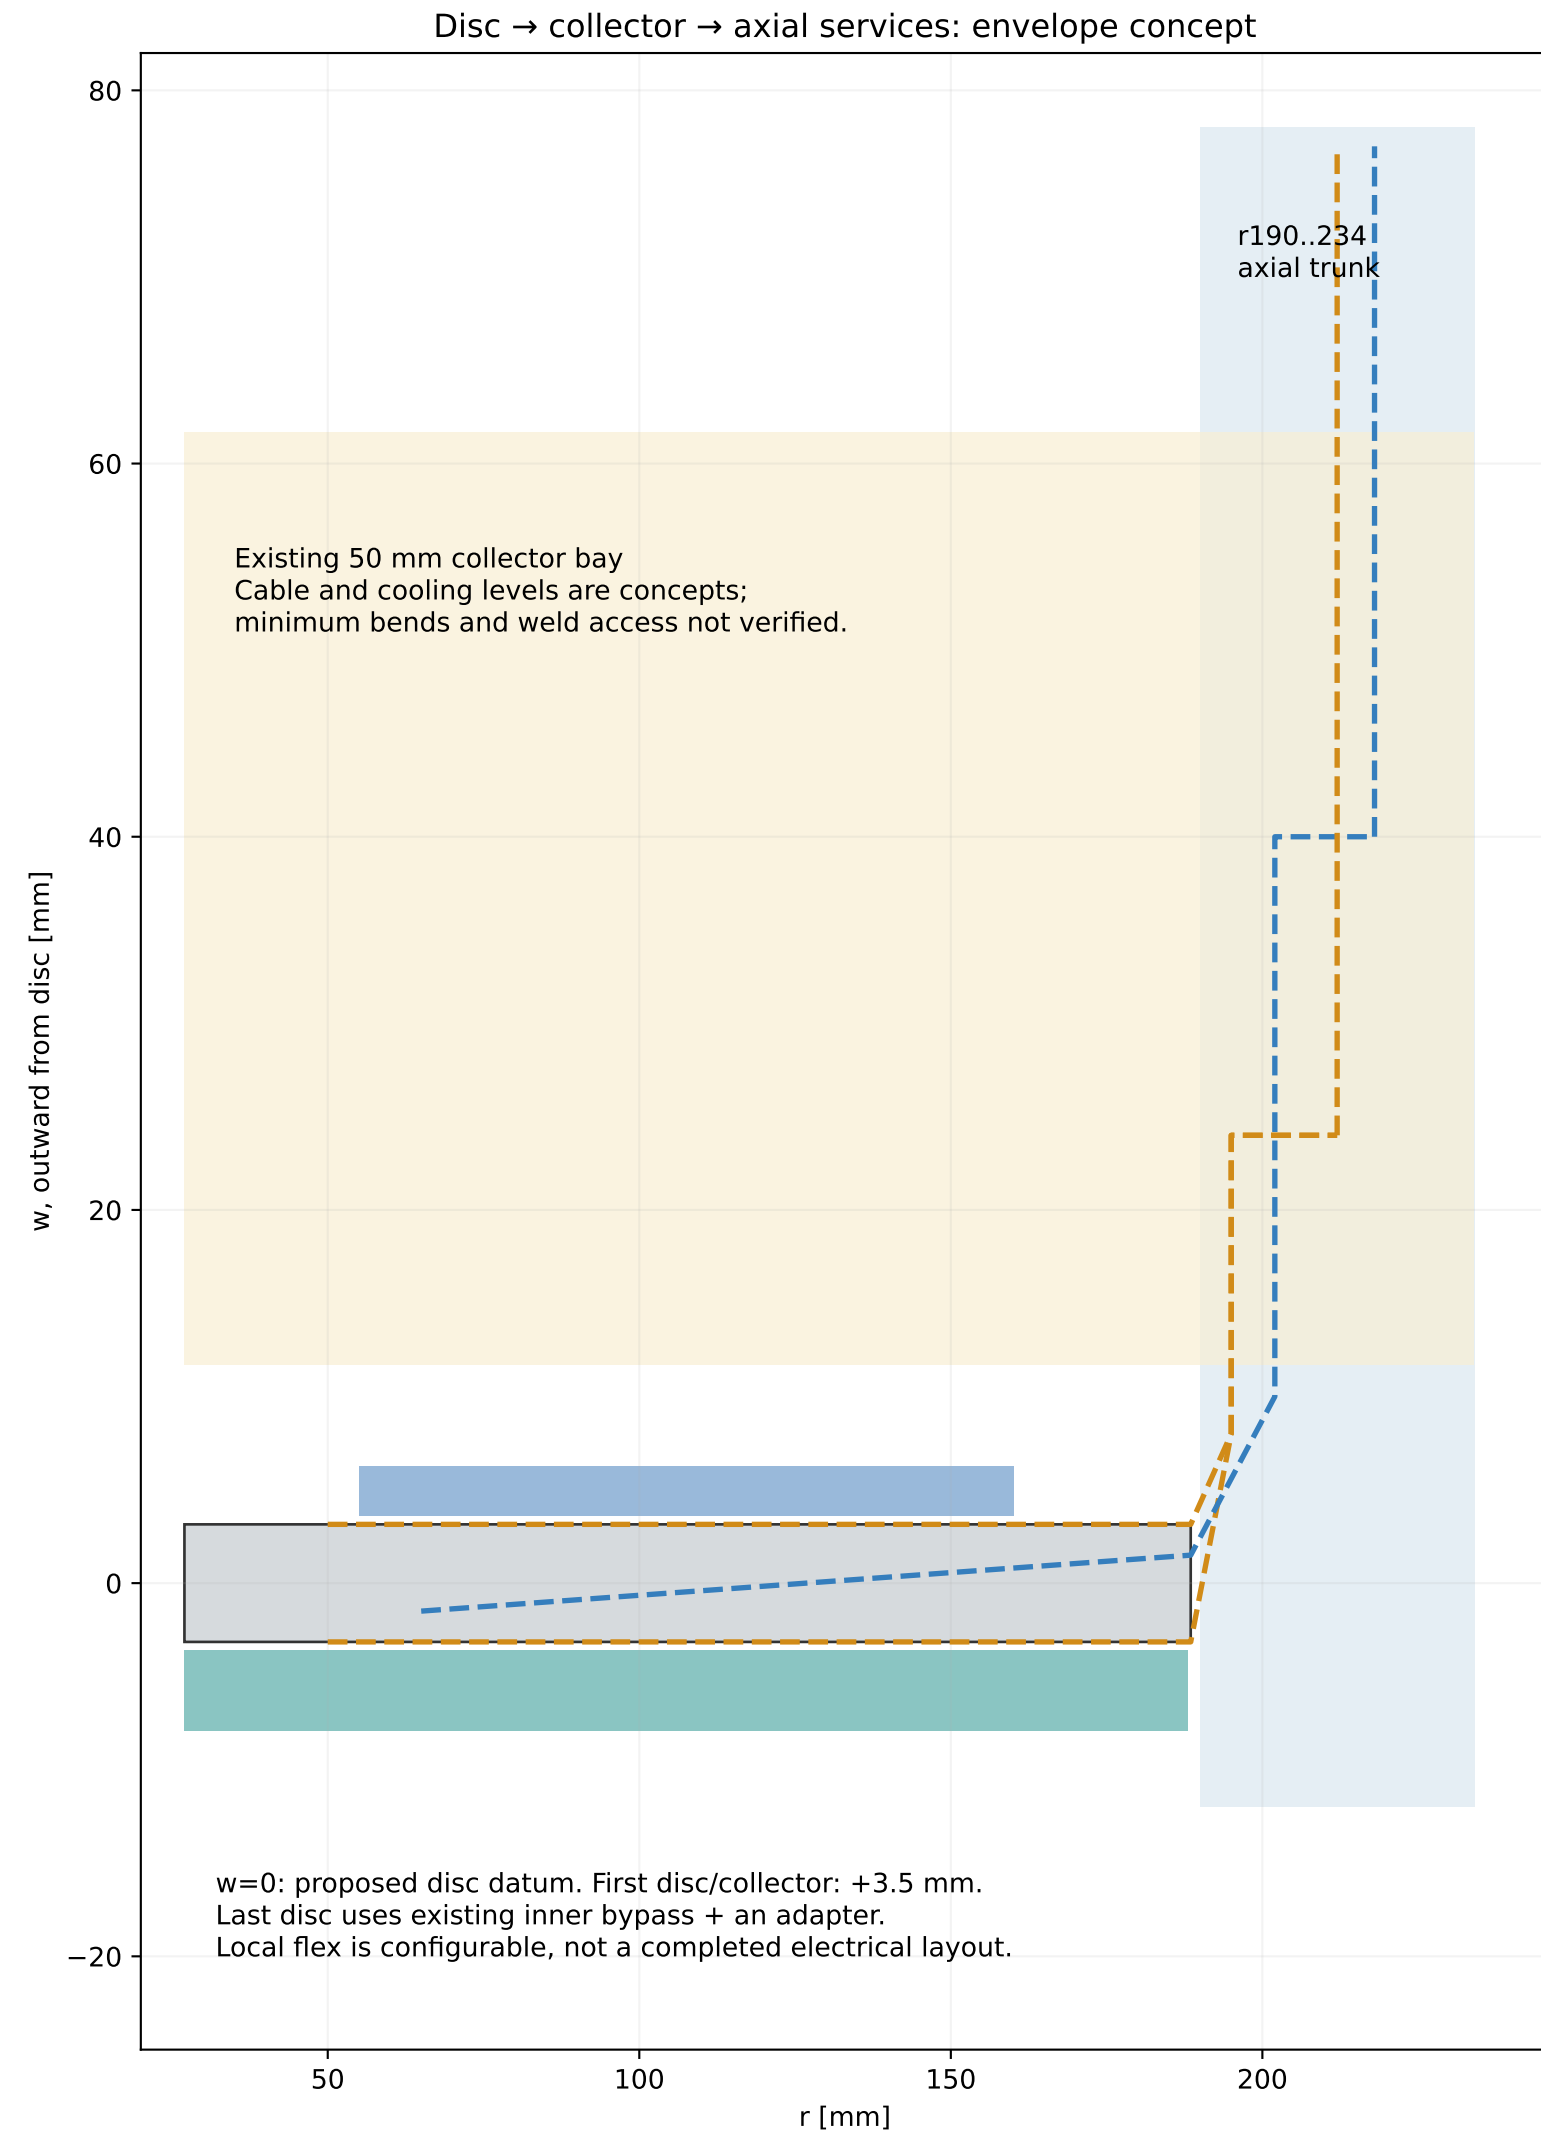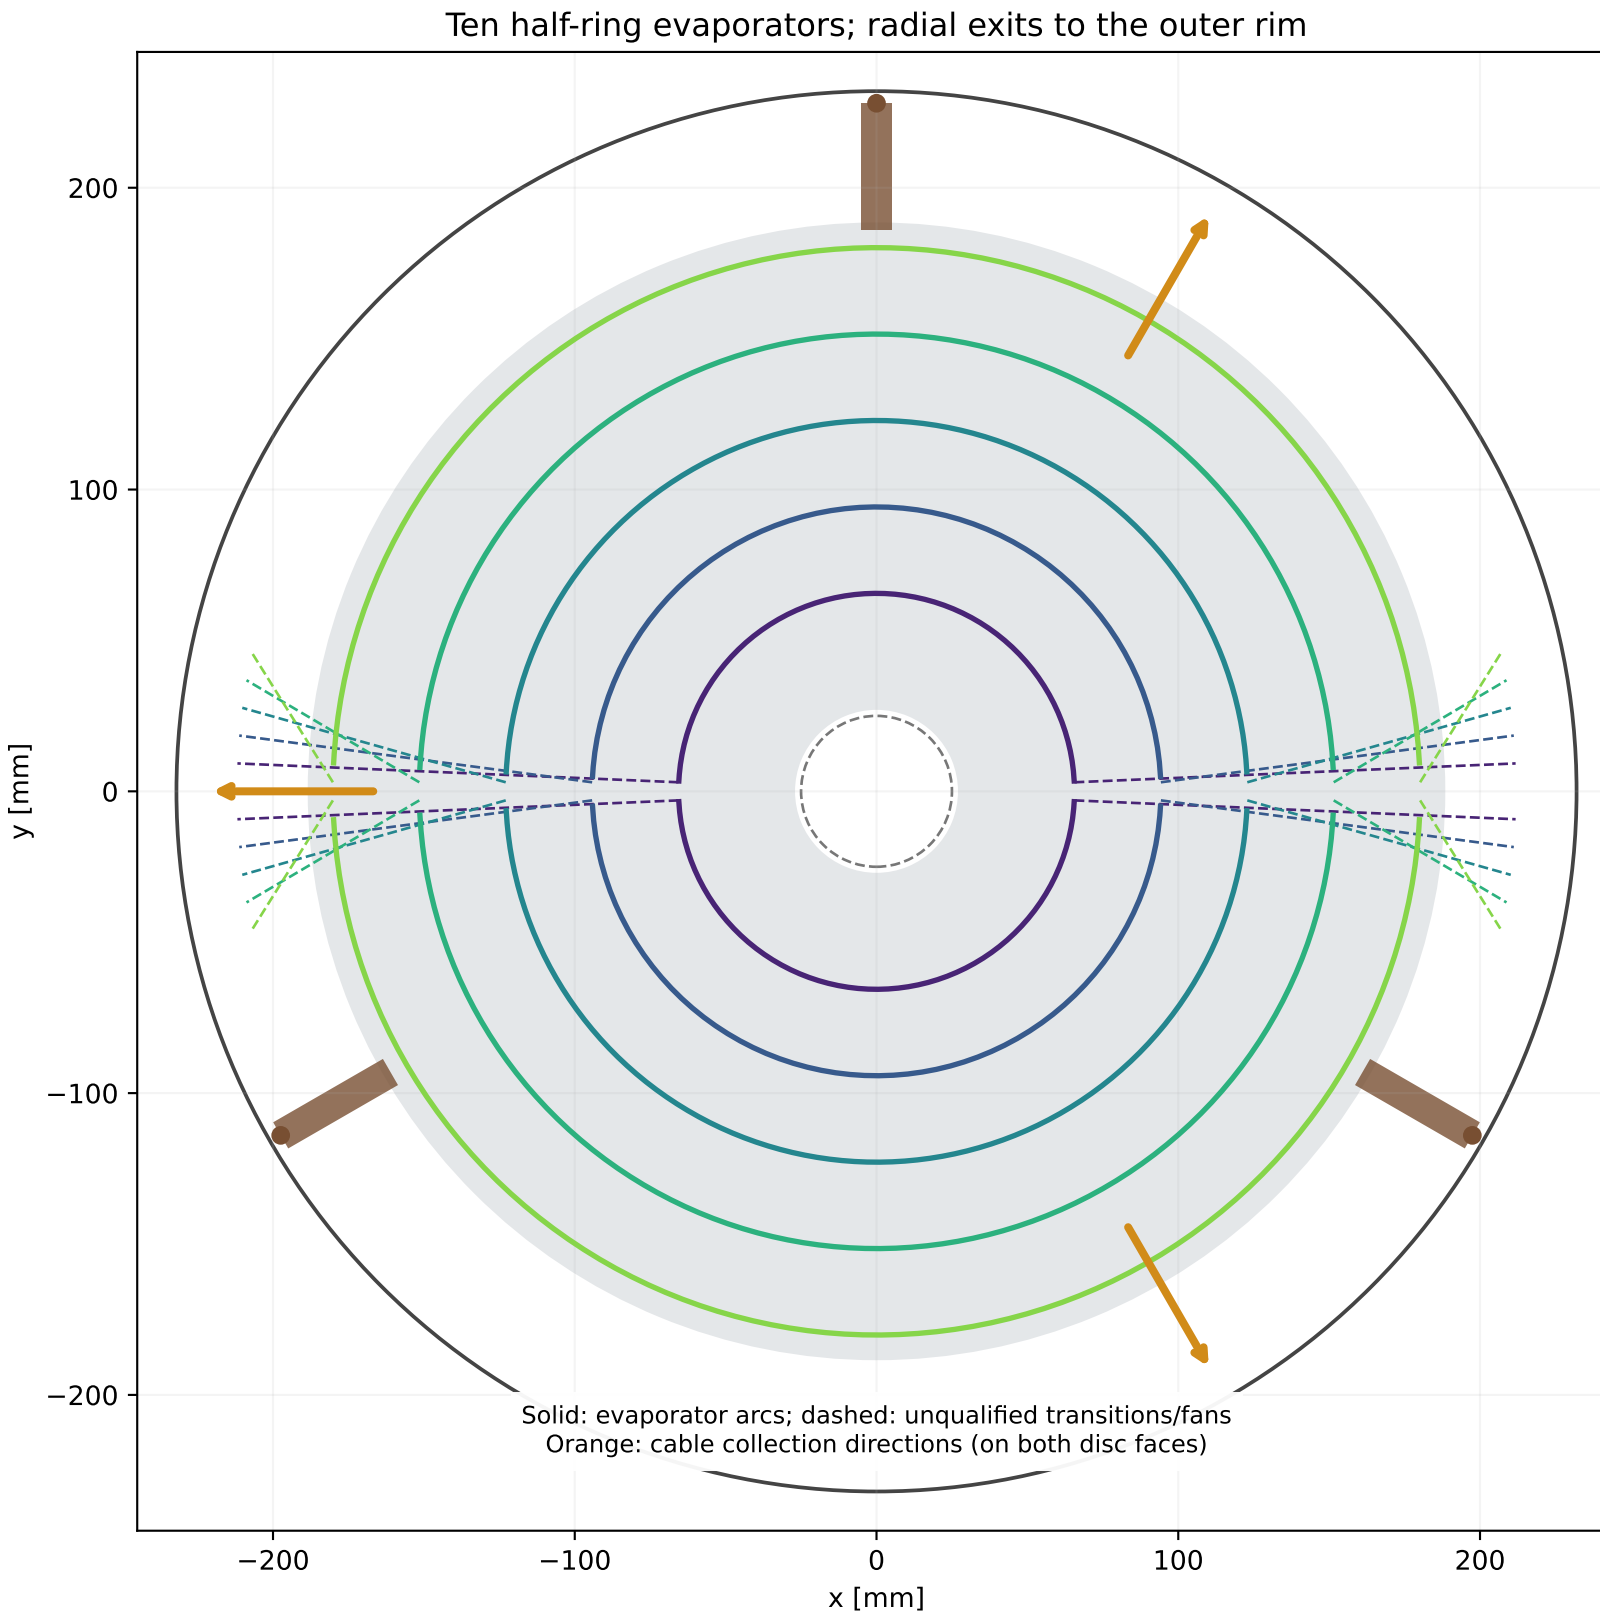

nODD / DES-014 / Carrier, rails and installation datum

Nine common discs per end; negative end mirrors outward coordinate w

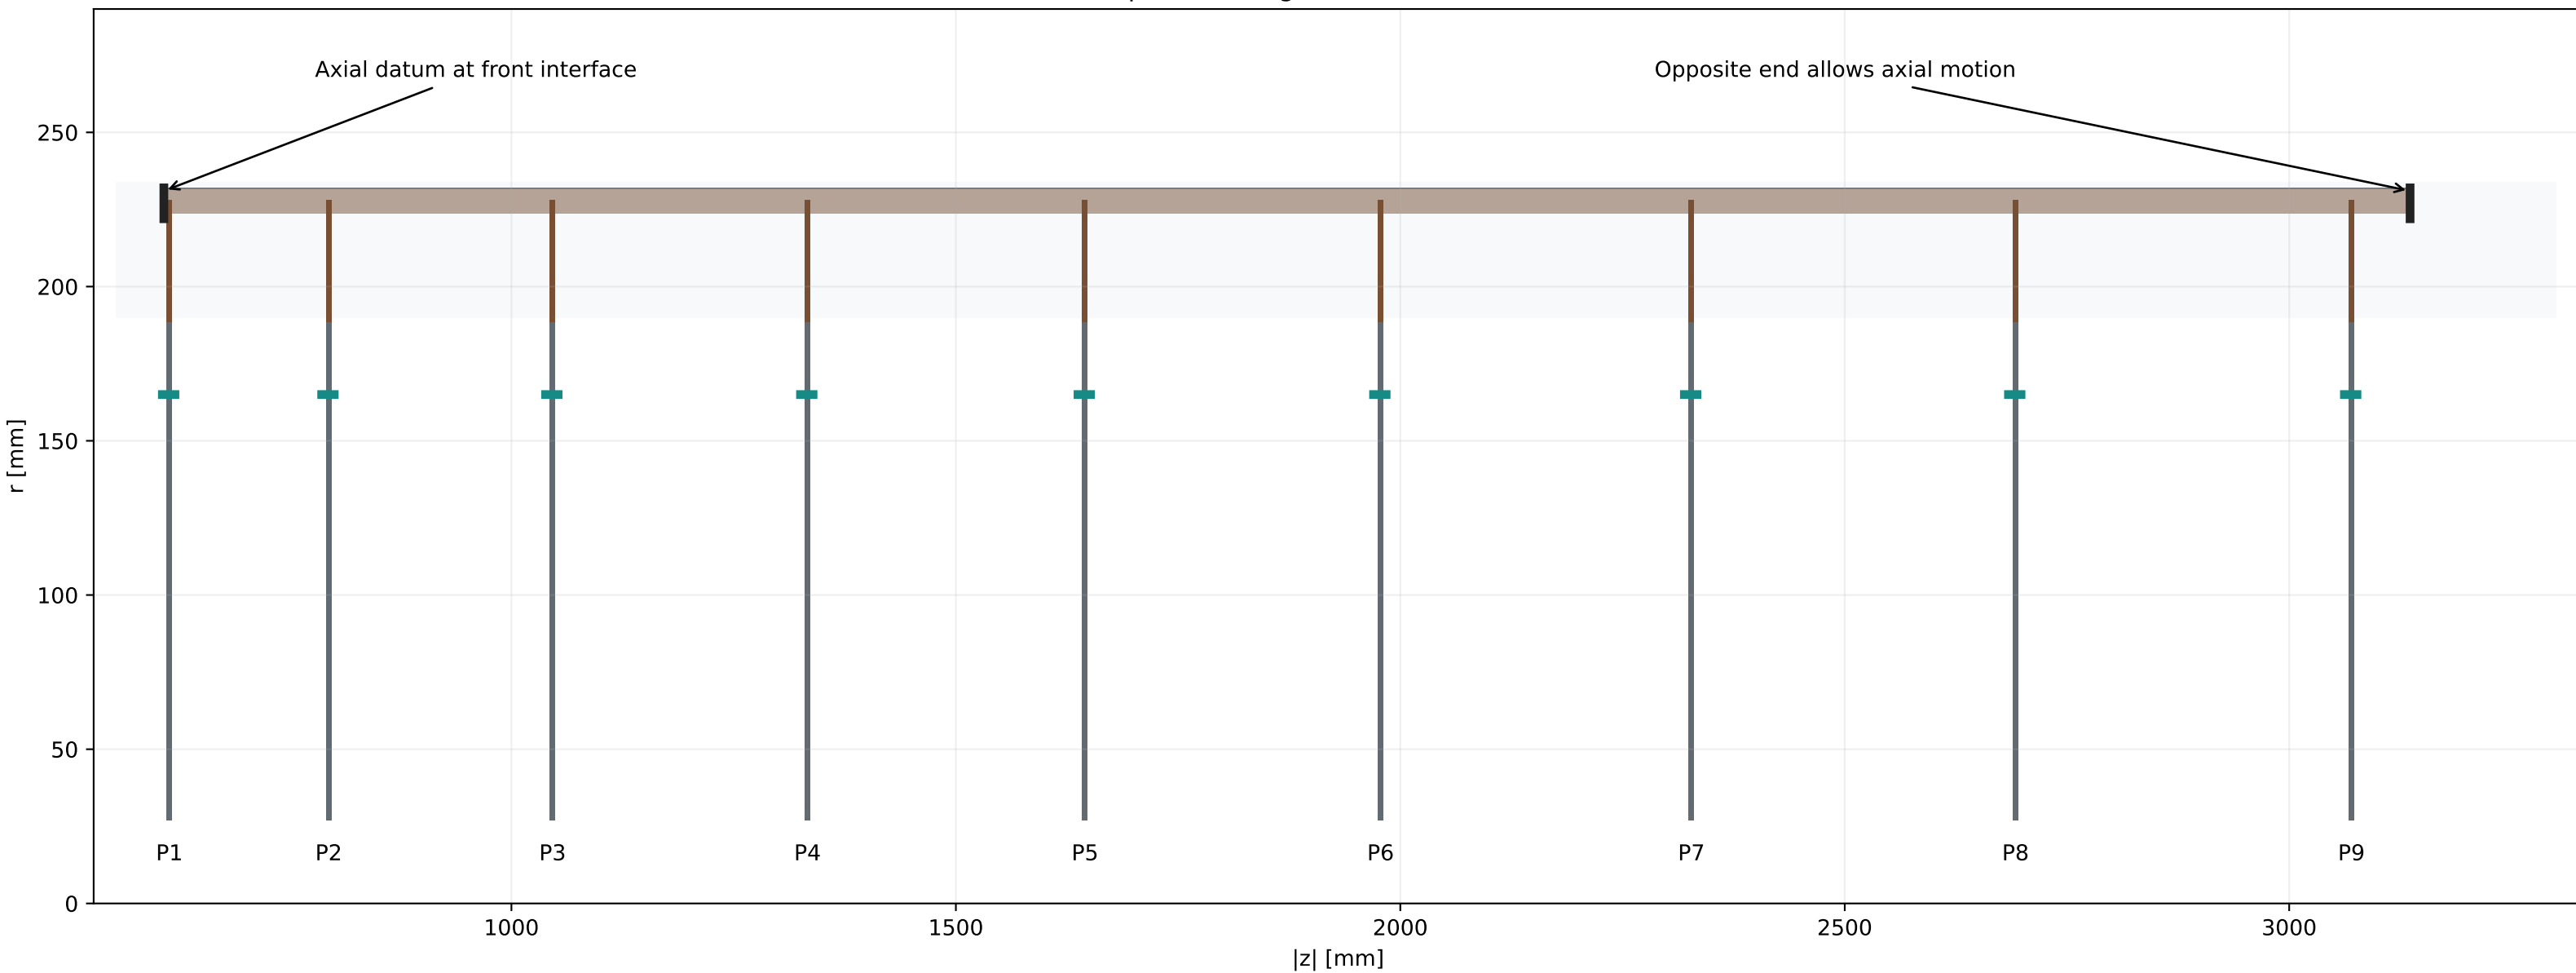

LOAD PATH

Module cradle → broad thermal foot → sandwich disc → three tongues → rails → closed shell → end flanges

REPEATABLE MOUNT

Three preloaded stations: cone (3 constraints), slot (2), plane (1).

Common rail stations at 90° , 210° , 330° . Avoid a second rigid datum; add compliant preload/release access.

DIMENSIONAL PROPOSAL

Rails: 8×8 mm CFRP boxes, 0.4 mm walls, $r223.7..231.7$ mm.

Shell: $r231.7..232.0$ mm, $|z|609..3136$ mm. Tube closes the global load path.

Three 10 mm-wide sandwich tongues/disc connect $r186..228$ mm.


Whole-cassette axial insertion is assumed; independent extraction around the installed beam pipe is NOT established.

REVIEW BEFORE CONSTRUCTION

Cone/slot/plane inserts, spring forces, fasteners, thermal travel, shell seam, flange/frame interface, access and swept installation envelope need detailed design. Beam estimates do not qualify these joints.

nODD / DES-014 / Thermal and material screening — limits retained

−40 °C CO₂; edge-biased heat; unmeasured h = 20 kW/(m² K)

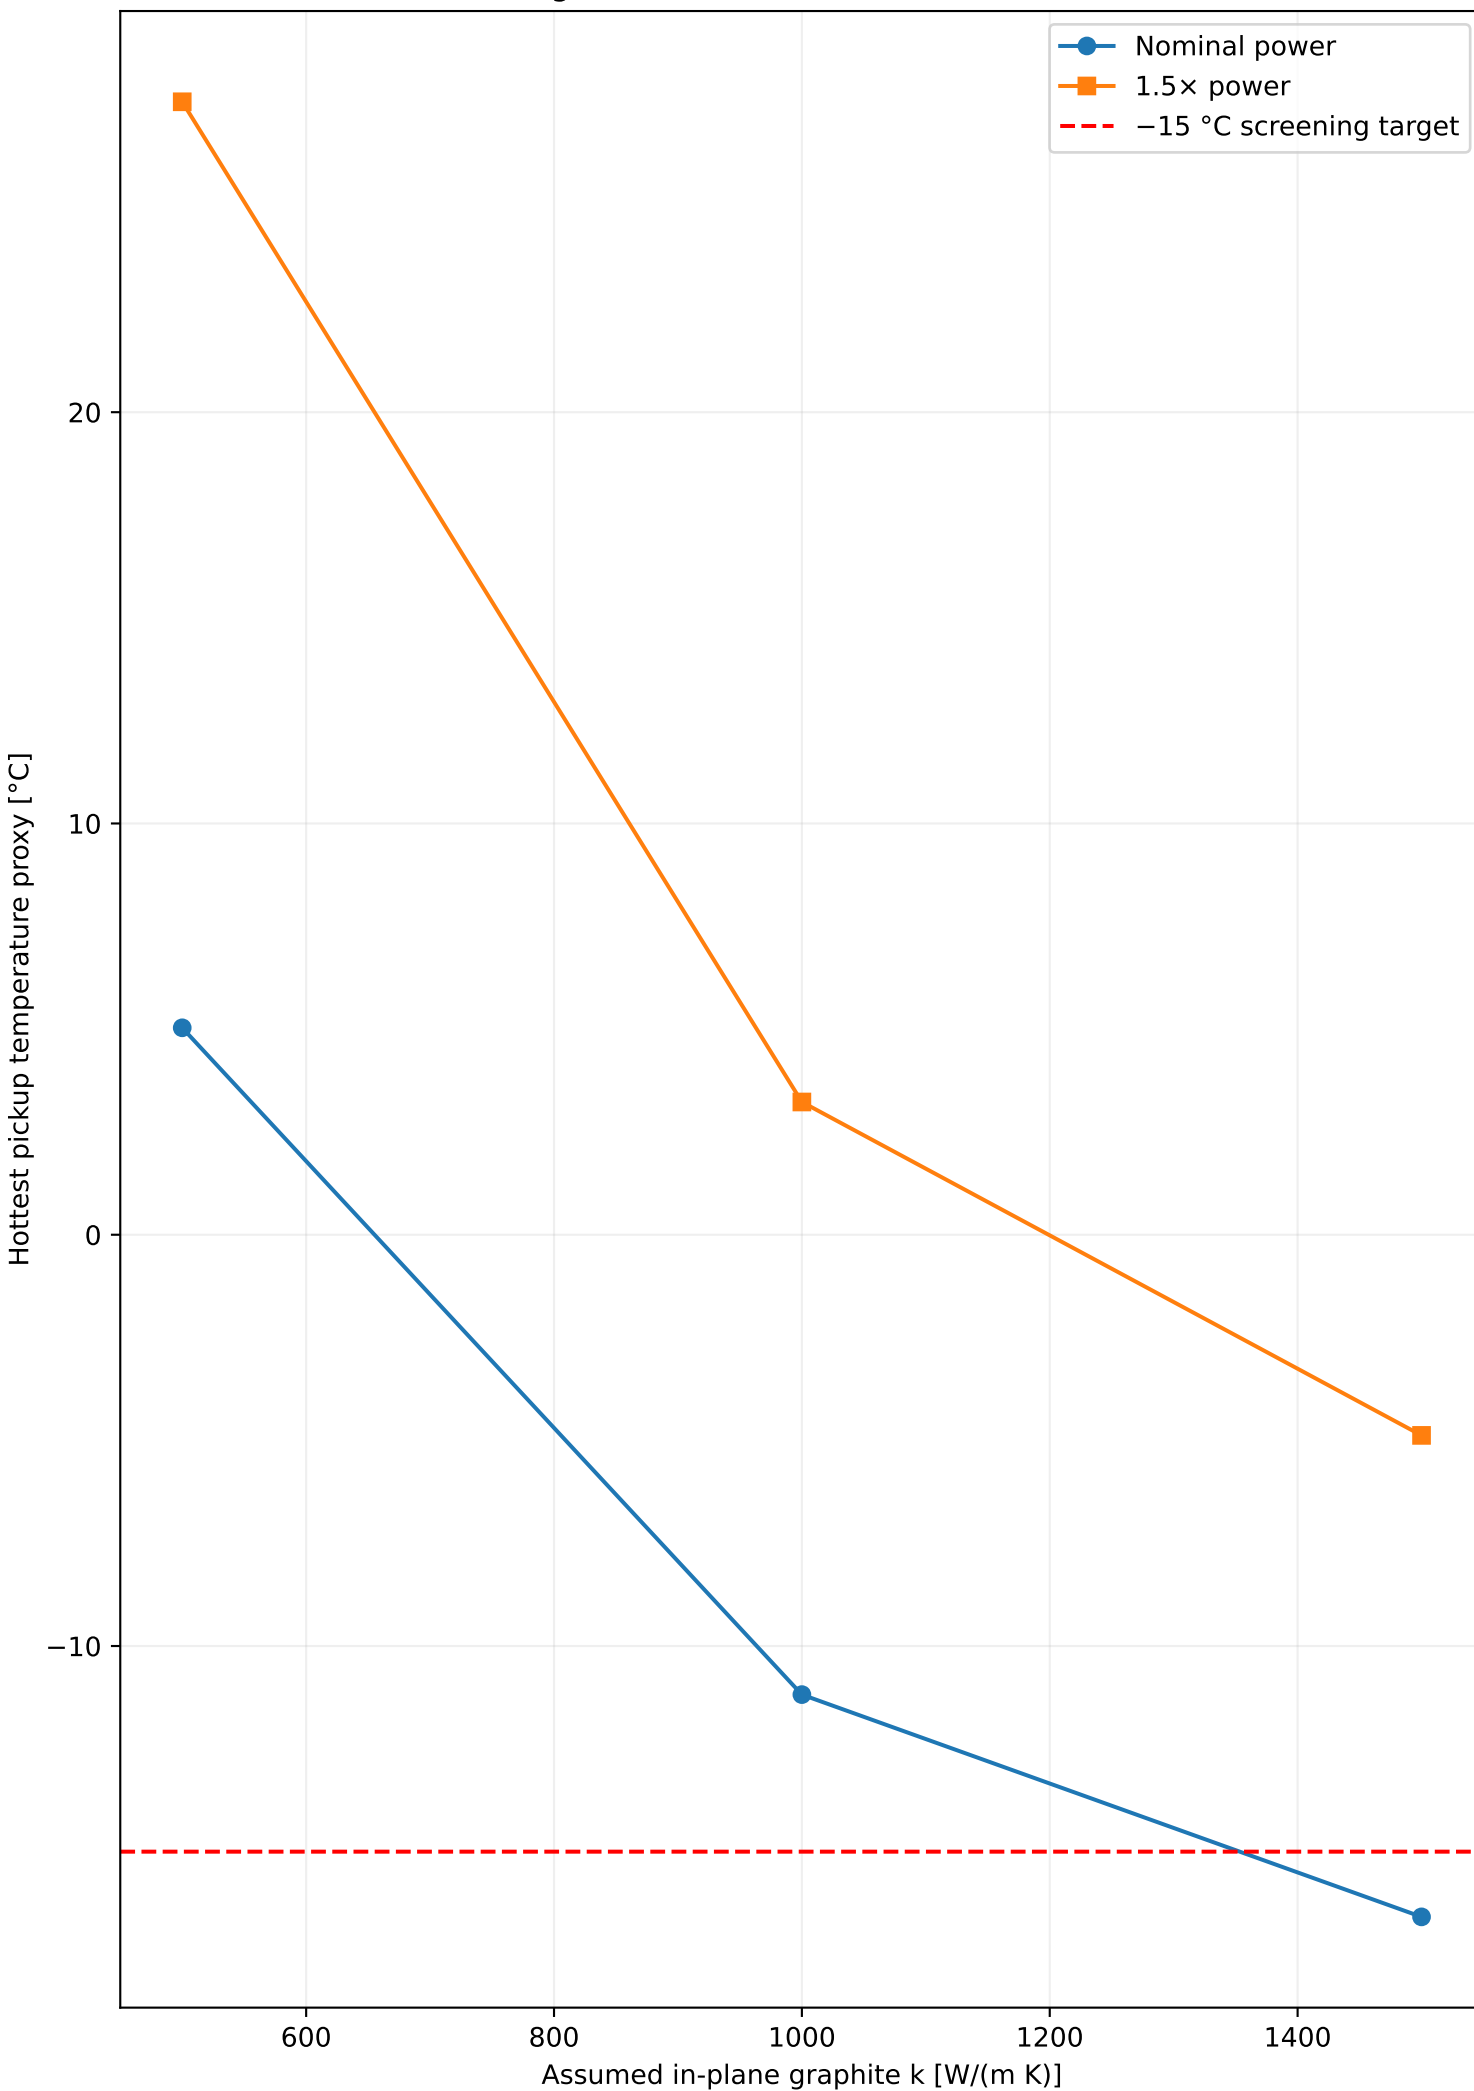

Local passive inventory; liquid fill is a mass bound

