



Candidate A — sensors inward, support outward B1 | nominal $r = 34$ mm | 12 staves

x-y section at $z = +25$ mm · actual radial staggering · no local tilt

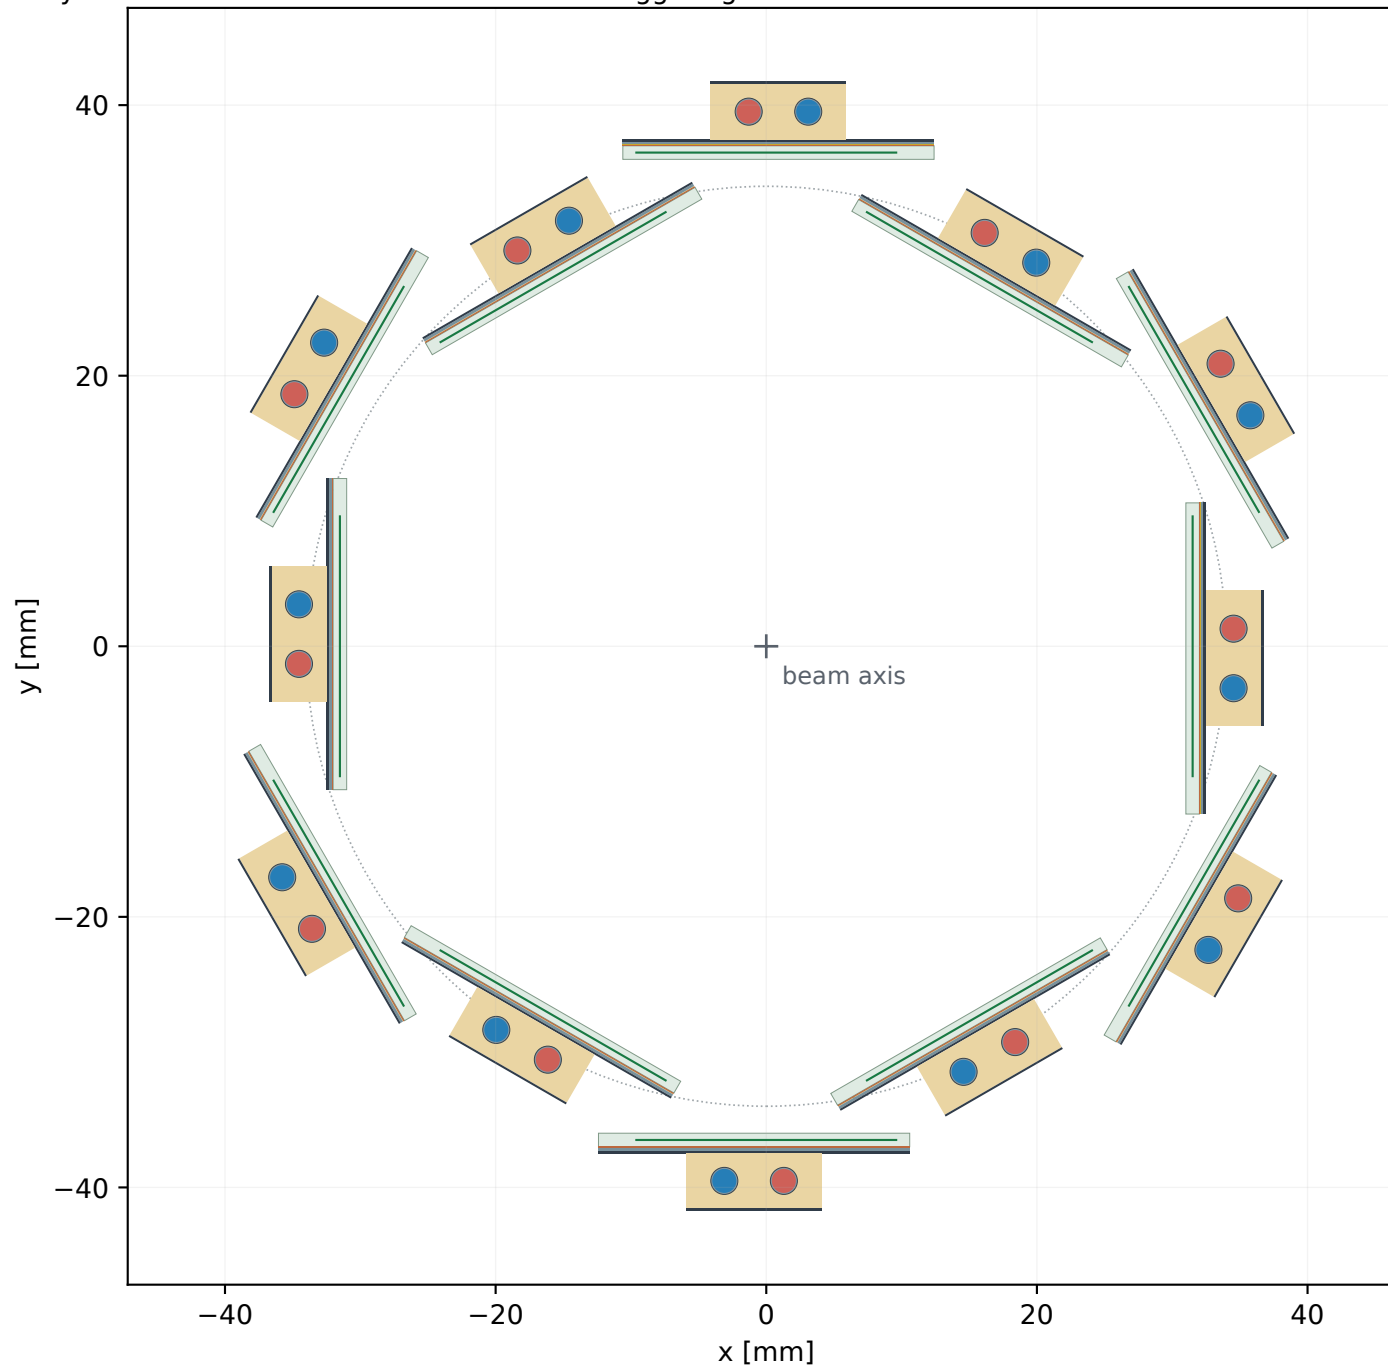

- Active sensor plane (fixed)
- Module body envelope: 1 mm
- CFRP skins
- Conductive carbon foam
- Graphite + interface / insulation
- Titanium tube wall
- CO₂ circuit 1 (+z)
- CO₂ circuit 2 (−z)
- Nominal layer radius

B1 stave detail (same x-y axes)

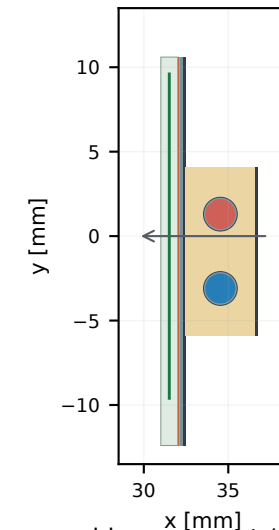

← beam / sensor side support / +r →

Single modules; 24 cooling tubes
Outer assembly radius: 42.13 mm
Closest support-to-other-module gap:
1.661 mm (nominal boxes)

PROTOTYPE · Dimensions in mm, true aspect ratio; sensor line width is symbolic.
Module / active-plane positions unchanged; internal sensor-ASIC stack unresolved.
Section is between bearings: global frame, ribs, end joints and flex are not shown or qualified.