


Candidate A — sensors inward, support outward

All four barrels | 82 staves | 164 cooling tubes

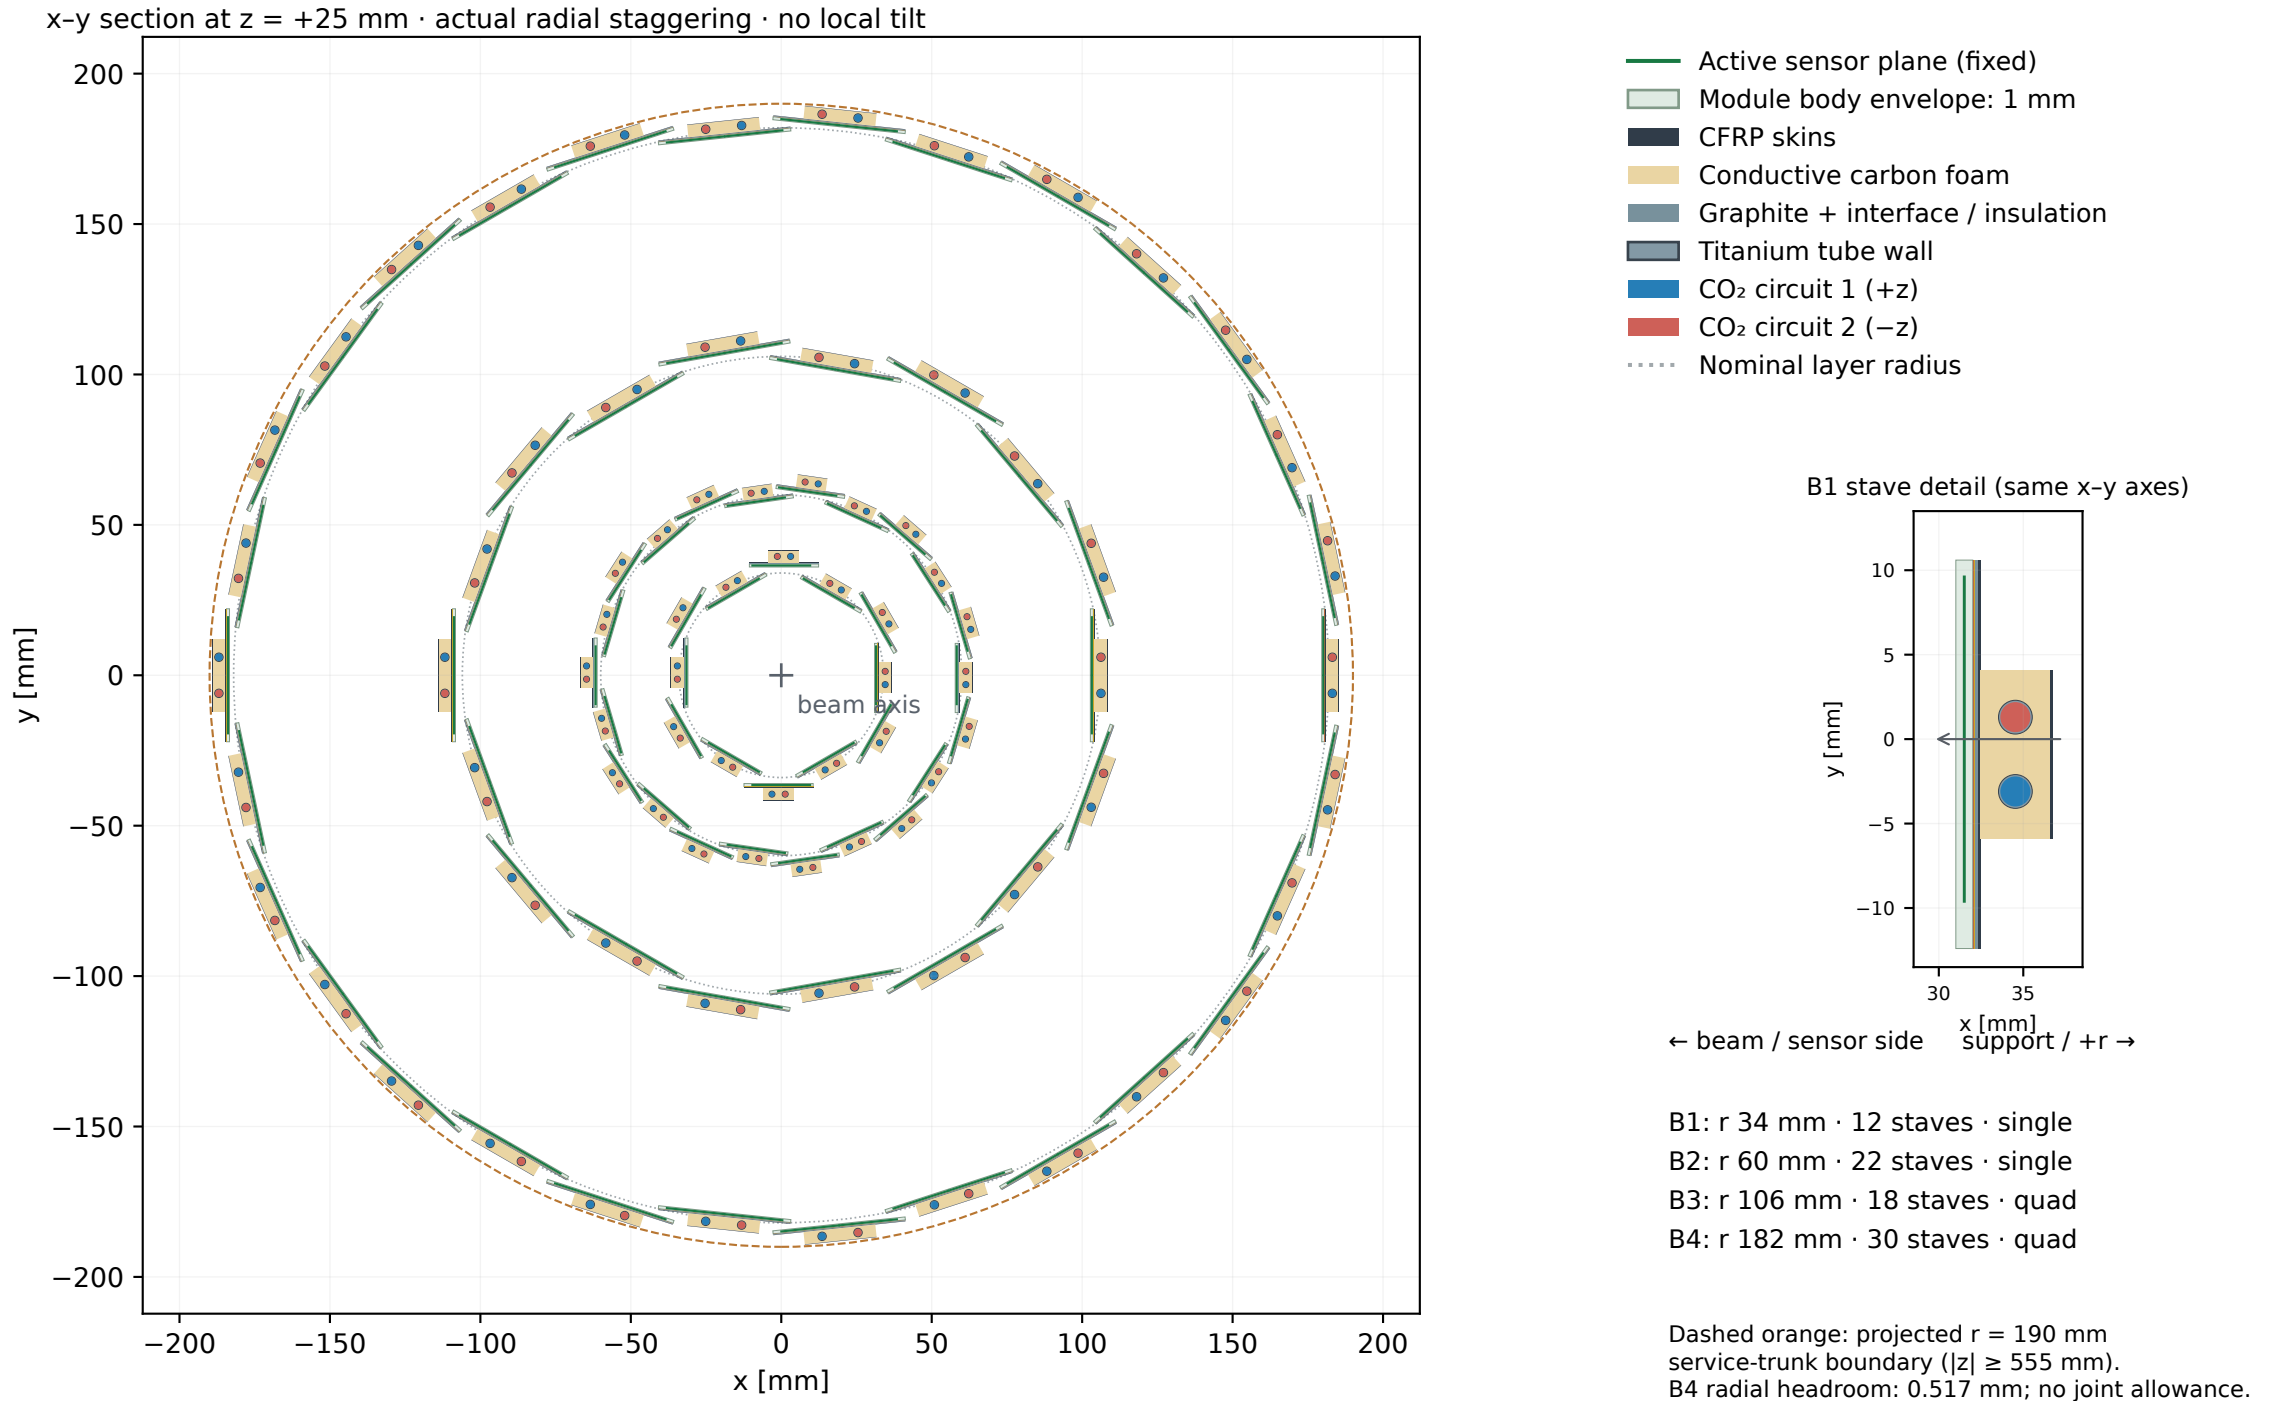

PROTOTYPE · Dimensions in mm, true aspect ratio; sensor line width is symbolic.
 Module / active-plane positions unchanged; internal sensor-ASIC stack unresolved.
 Section is between bearings: global frame, ribs, end joints and flex are not shown or qualified.