


Candidate A — outward staves with mounting rings


B1 | 12 staves | 6 ring stations

Actual x-y section at $z = +110$ mm, through an intermediate ring

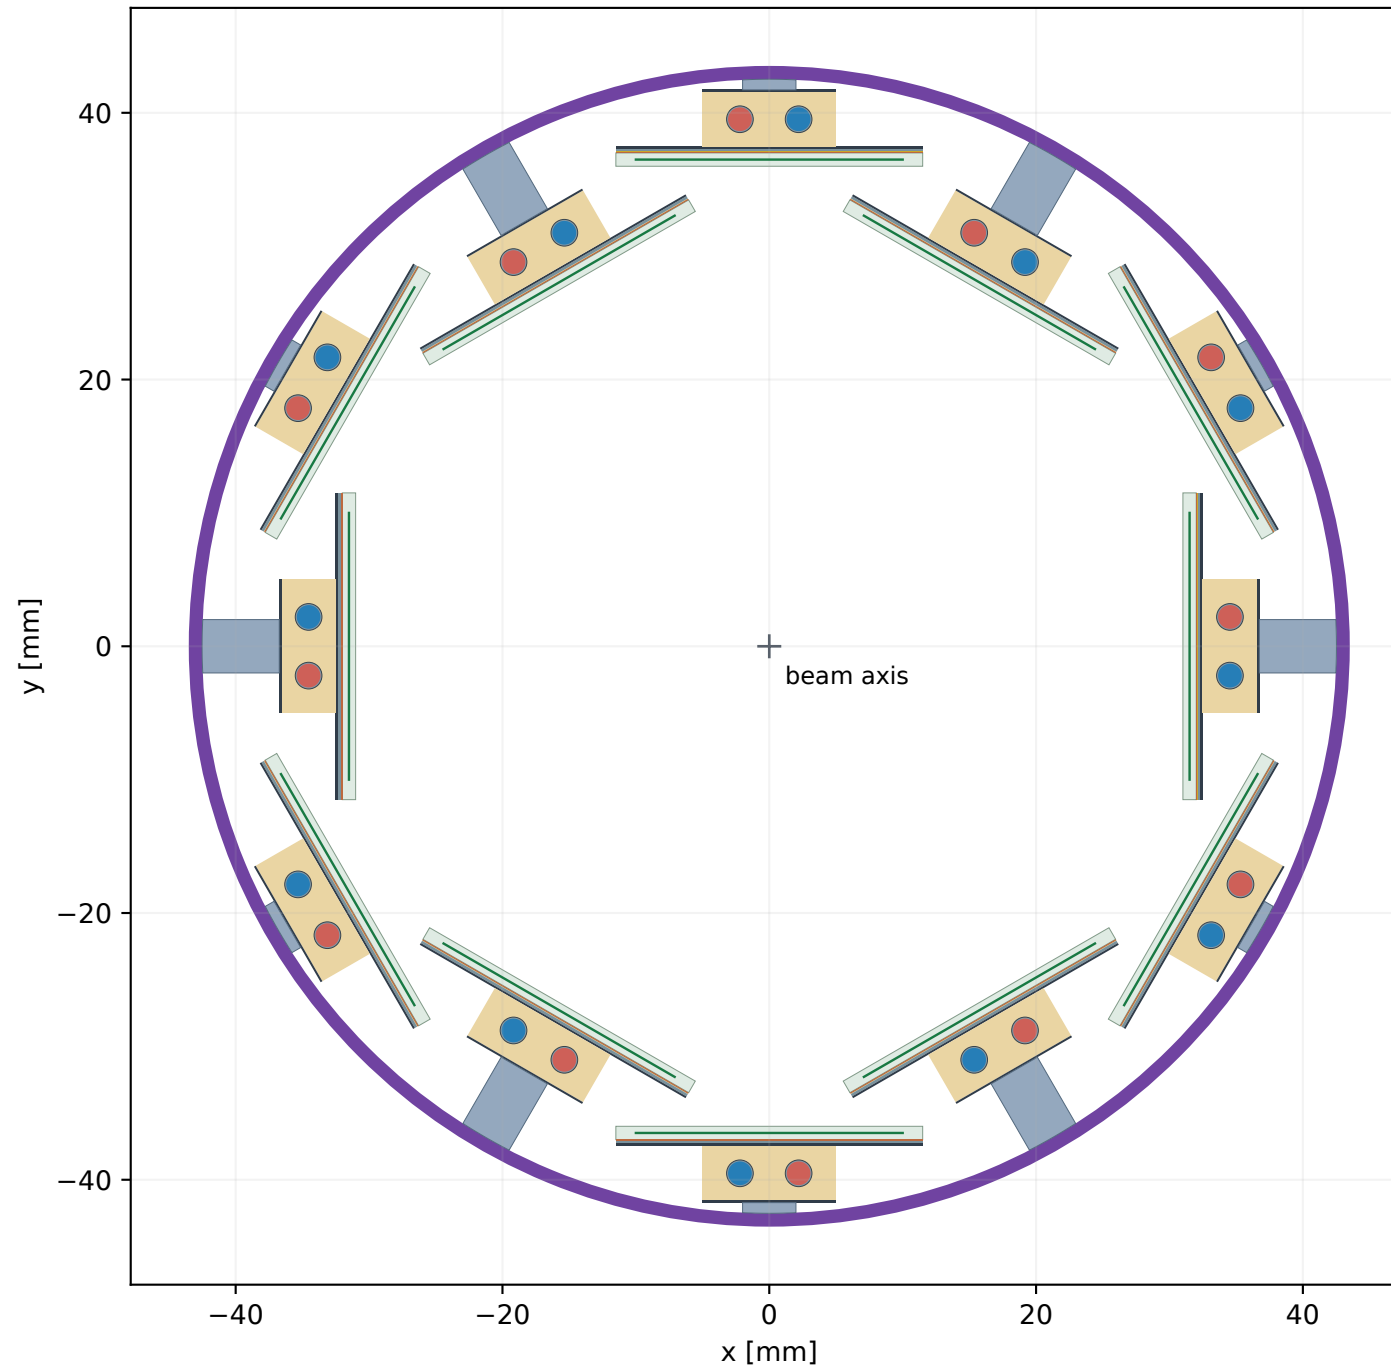

- Active sensor plane (fixed)
- Module body envelope
- Foam + CFRP stave (outward)
- Two Ti / CO₂ circuits per stave
- CFRP ring: 1 mm radial $\times$ 8 mm z
- Bearing-foot envelope (4 mm wide)

B1: stave $\rightarrow$ foot $\rightarrow$ ring

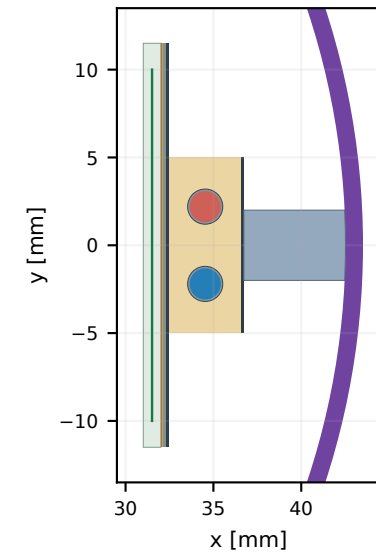

Sensor side $\leftarrow$ beam $\rightarrow$ +r / ring $\rightarrow$

Ring radii: 42.516–43.516 mm

Foot heights: 0.80–5.78 mm

6 rings + 72 foot envelopes

z stations [mm]: -546, -330, -110, +110, +330, +546

2 end mounts + 4 stiffening rings / layer

Rings are not independently grounded bearings.

PROTOTYPE · mm, true x-y aspect ratio; sensor line width symbolic. Module positions unchanged.
Feet follow the staggering. Pins, inserts, split joints and global end mounts remain unresolved.
This is a ring plane; the earlier $z = 25$ mm section remains the view between rings.