



Candidate A — outward staves with mounting rings

B4 | 30 staves | 6 ring stations

Actual x-y section at $z = +110$ mm, through an intermediate ring

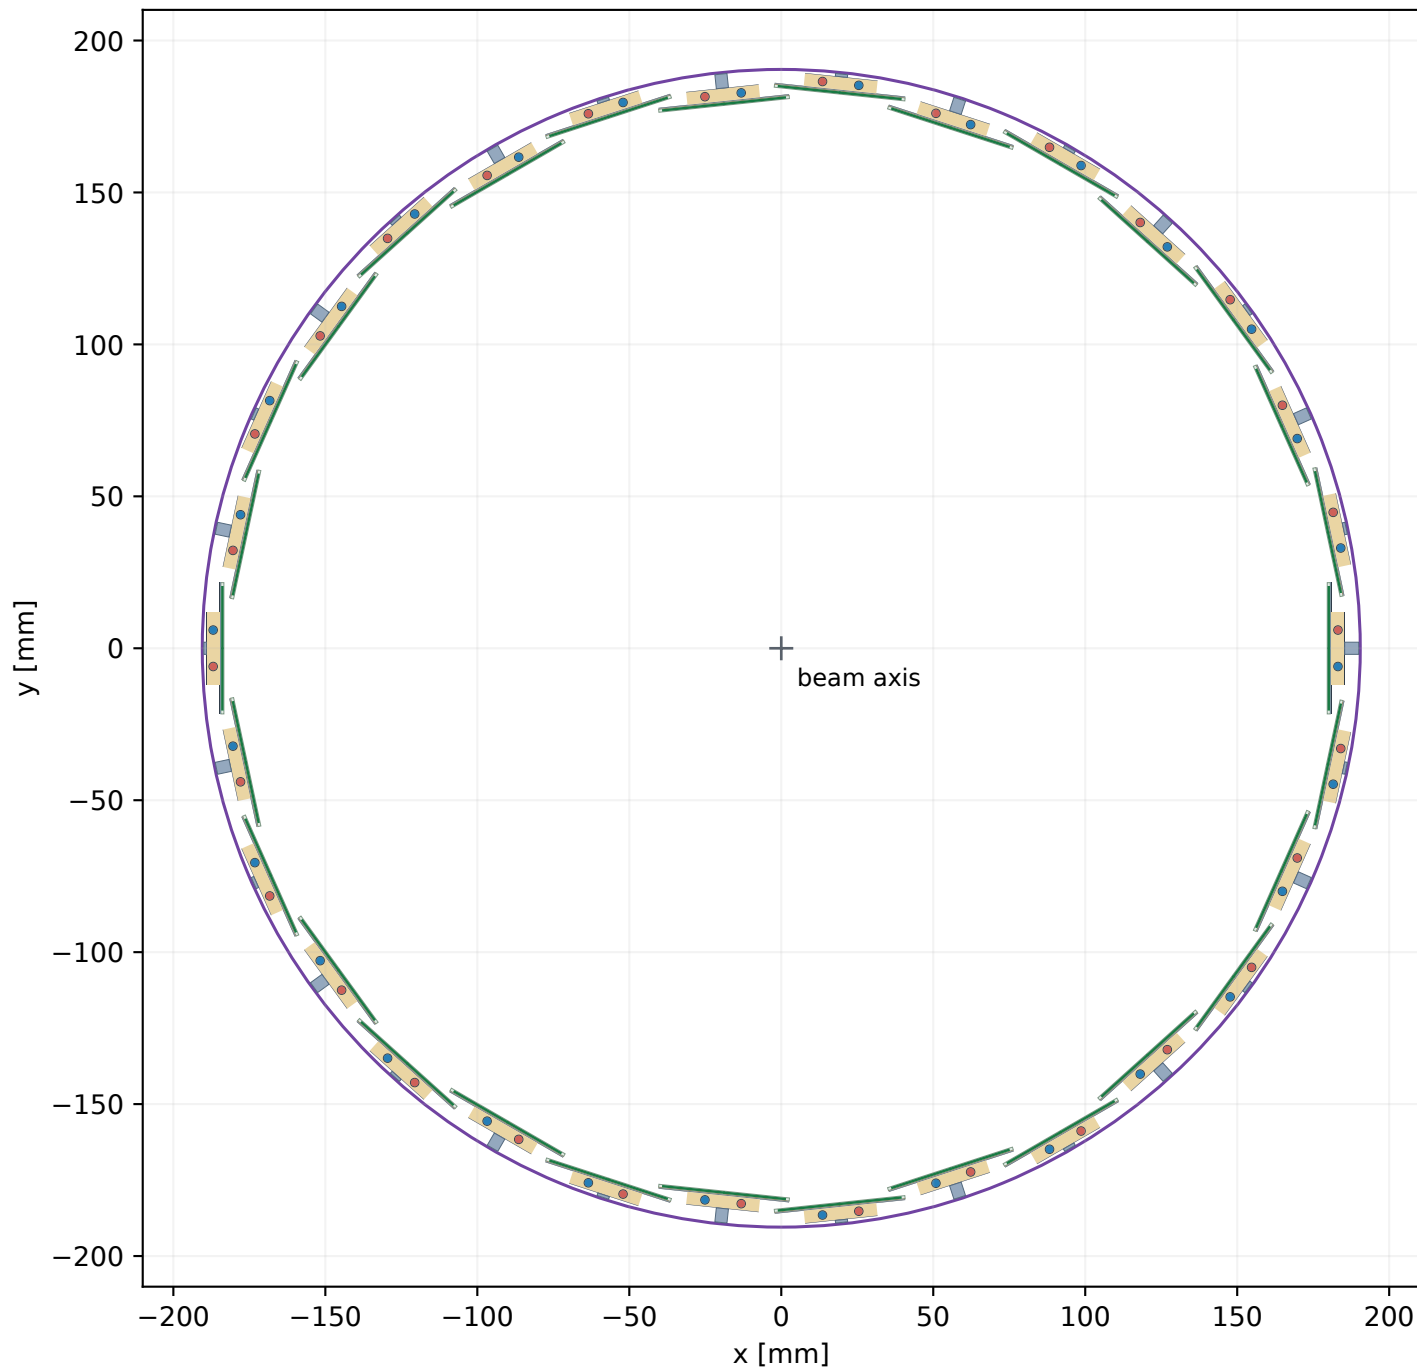

B4: stave $\rightarrow$ foot $\rightarrow$ ring

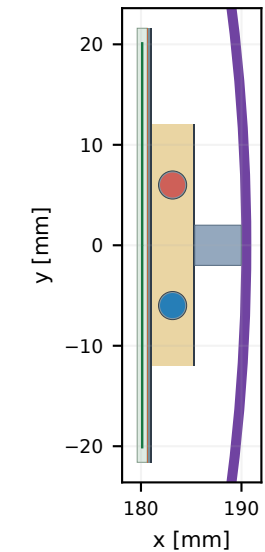

Sensor side $\leftarrow$ beam $\rightarrow$ +r / ring $\rightarrow$

Ring radii: 189.983–190.983 mm

Foot heights: 0.88–4.63 mm

6 rings + 180 foot envelopes

z stations [mm]: -546, -330, -110, +110, +330, +546

2 end mounts + 4 stiffening rings / layer

Rings are not independently grounded bearings.

PROTOTYPE · mm, true x-y aspect ratio; sensor line width symbolic. Module positions unchanged.
Feet follow the staggering. Pins, inserts, split joints and global end mounts remain unresolved.
This is a ring plane; the earlier $z = 25$ mm section remains the view between rings.