Common cross-section at an accessible chip edge

Sensor backside above; chip backside below. Schematic geometry; nominal thicknesses.

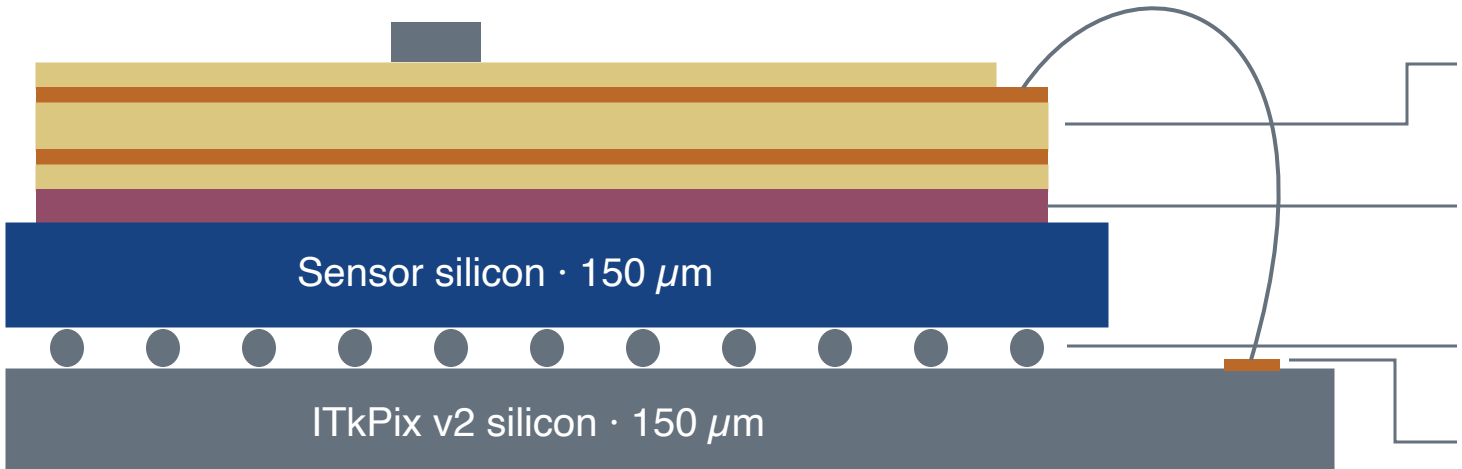

Flex: 25 μm PI + 2 × 12.5 μm coverlay
2 × 18 μm patterned Cu; separate films
Other adhesive and passives: undefined

Flex-to-sensor epoxy · 25 μm
Grade and bonded area: undefined

Discrete bumps · 20 μm standoff
Shape and alloy: undefined

Chip pad → Al wire → flex pad
Wire: 25 μm; loop geometry undefined

Chip backside; thermal contact is shown in the upper panel.