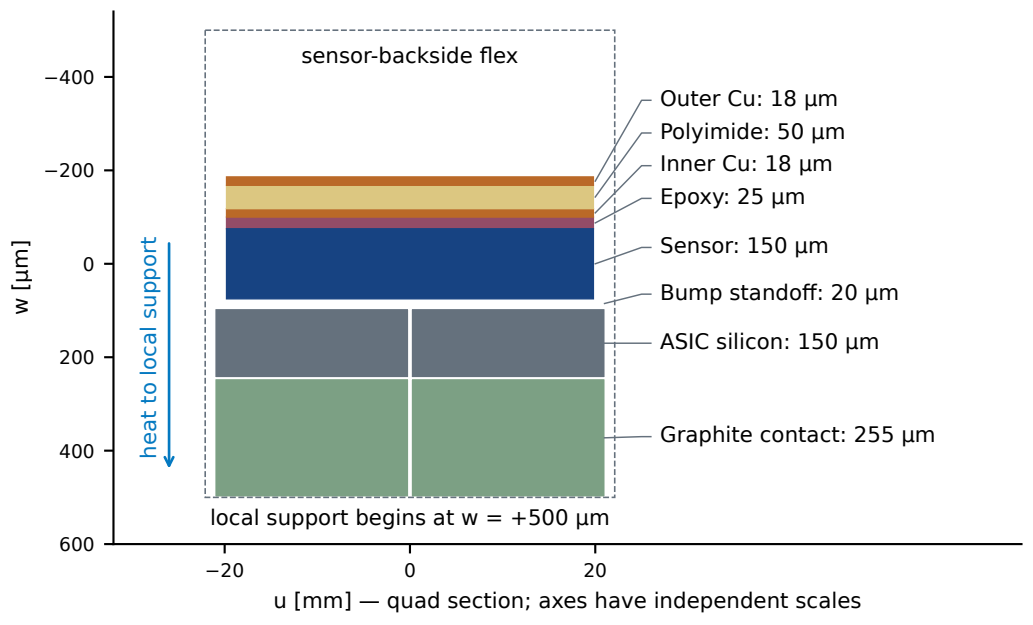

sensor-backside flex
Outer Cu: 18 µm
Polyimide: 50 µm
Inner Cu: 18 µm
Epoxy: 25 µm
Sensor: 150 µm
Bump standoff: 20 µm
ASIC silicon: 150 µm
Graphite contact: 255 µm
heat to local support
local support begins at w = +500 µm
w [µm]
−400
−200
0
200
400
600
−20
0
20
u [mm] — quad section; axes have independent scales