


DES-002 | Support spacing and service handoff | PROTOTYPE

Two straight independent CO₂ circuits per stave, flowing in opposite directions — no central U-bend

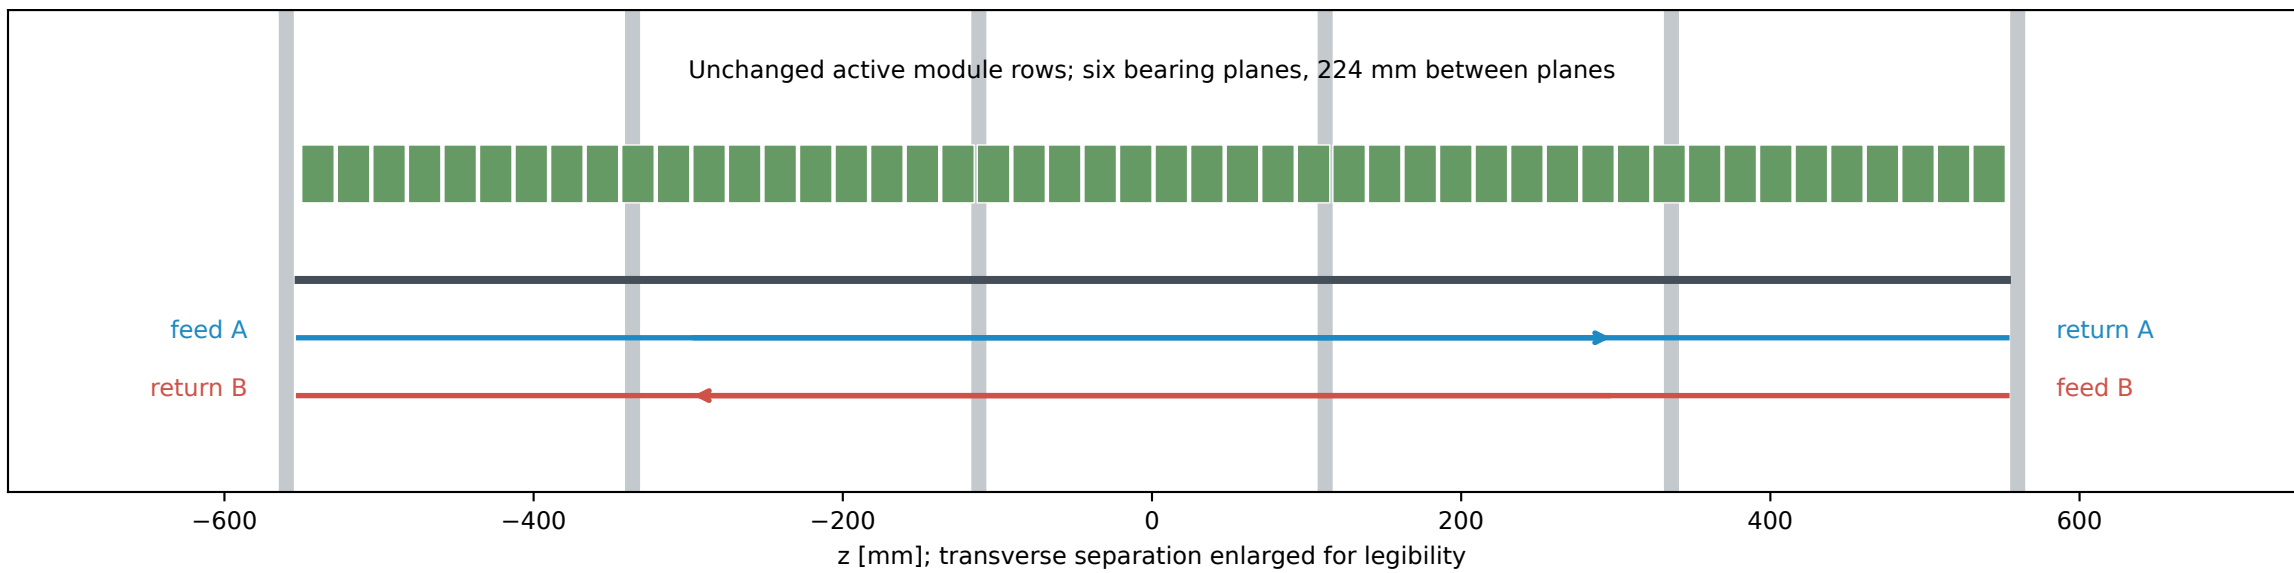

Mounting and load path

One axial locator; remaining bearings slide or flex axially during cooldown. Ribs support radial/tangential loads. Four intermediate shared CFRP rib planes plus end flanges; rib positions are a proposal, not installed geometry. Hardpoints, stagger-height brackets and the global support-shell connection require CAD/FEA and material scans.

