



Candidate A — outward staves with mounting rings

All four barrels | 24 rings in total

Actual x-y section at $z = +110$ mm, through an intermediate ring

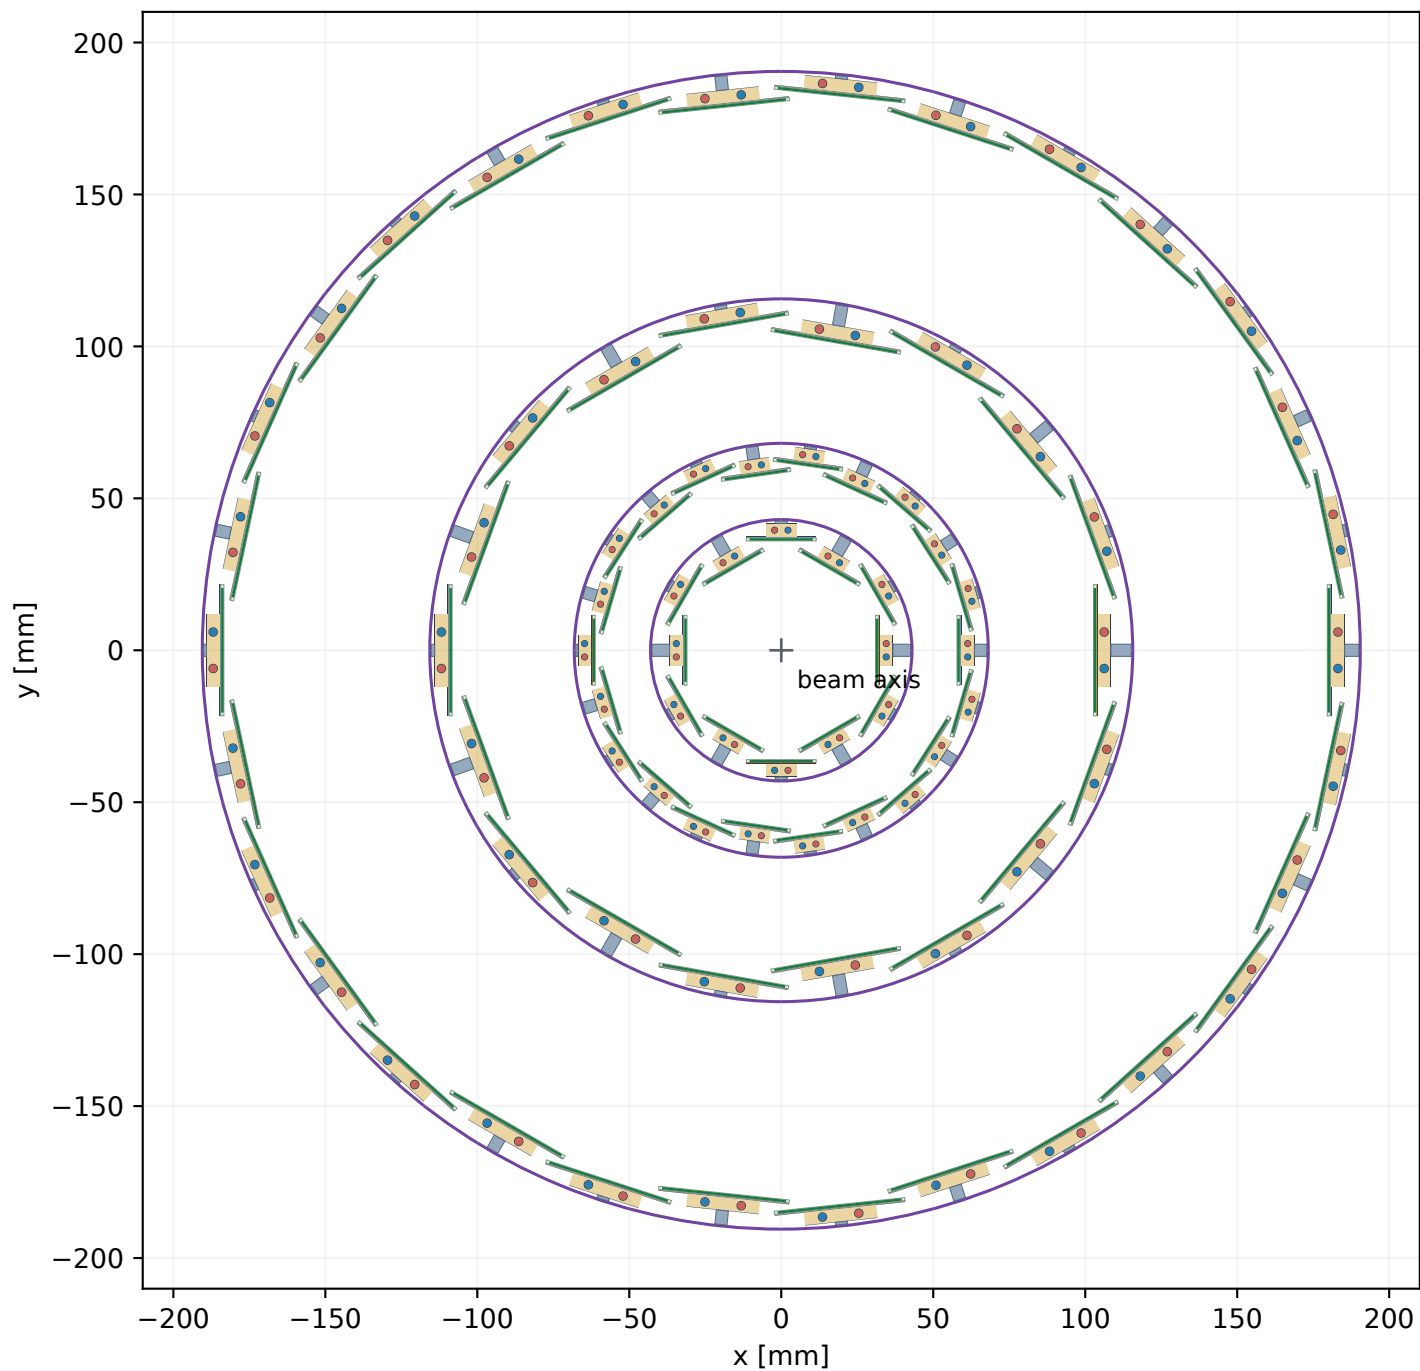

- Active sensor plane (fixed)
- Module body envelope
- Foam + CFRP stave (outward)
- Two Ti / CO₂ circuits per stave
- CFRP ring: 1 mm radial × 8 mm z
- Bearing-foot envelope (4 mm wide)

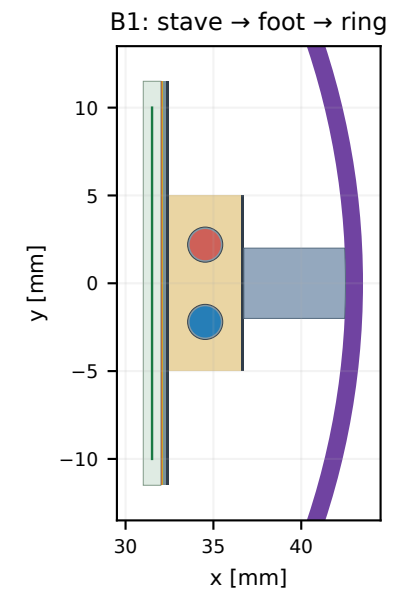

Sensor side ← beam +r / ring →

B1 ring outer r: 43.516 mm
 B2 ring outer r: 68.604 mm
 B3 ring outer r: 116.133 mm
 B4 ring outer r: 190.983 mm

z stations [mm]: -546, -330, -110, +110, +330, +546
 2 end mounts + 4 stiffening rings / layer
 Rings are not independently grounded bearings.

PROTOTYPE · mm, true x-y aspect ratio; sensor line width symbolic. Module positions unchanged.
 Feet follow the staggering. Pins, inserts, split joints and global end mounts remain unresolved.
 This is a ring plane; the earlier $z = 25$ mm section remains the view between rings.