
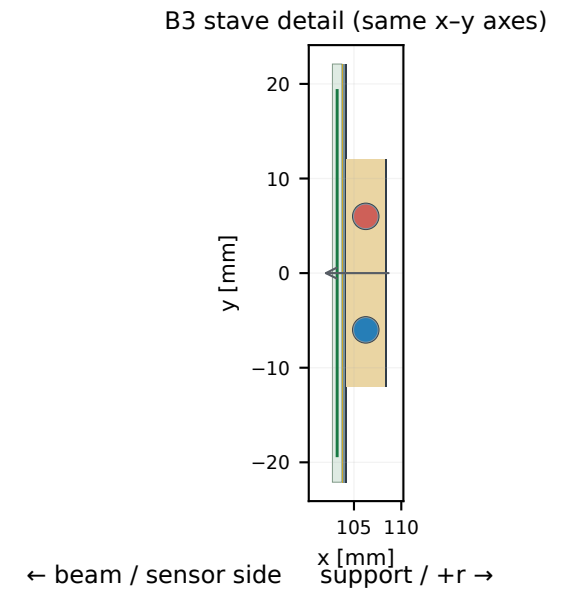


Candidate A — sensors inward, support outward B3 | nominal r = 106 mm | 18 staves

x-y section at z = +25 mm · actual radial staggering · no local tilt

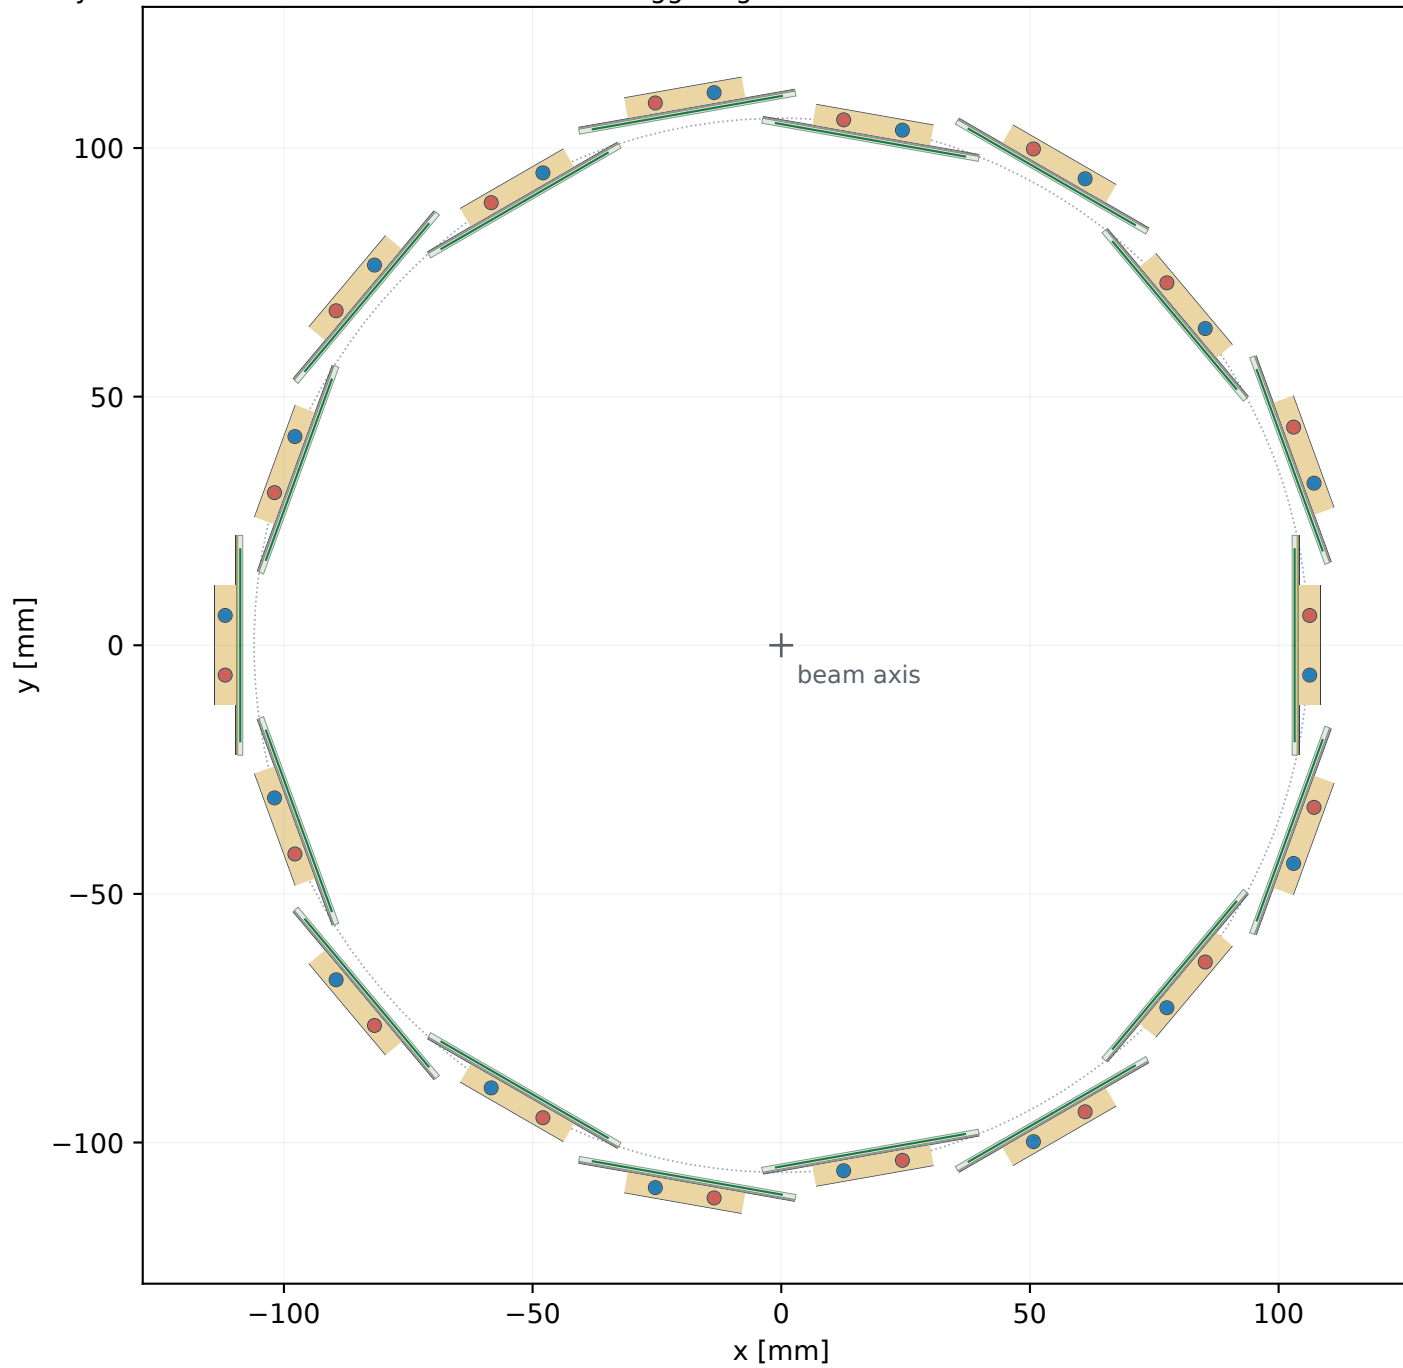

Quad modules; 36 cooling tubes
Outer assembly radius: 114.63 mm
Closest support-to-other-module gap:
2.807 mm (nominal boxes)

PROTOTYPE · Dimensions in mm, true aspect ratio; sensor line width is symbolic.
Module / active-plane positions unchanged; internal sensor-ASIC stack unresolved.
Section is between bearings: global frame, ribs, end joints and flex are not shown or qualified.