# Power and thermal requirements for the proposed module

Assumed fixed electronics fractions: 25% nominal, 50% adverse, 100% no-scaling stress control. Leakage remains 2 W/module.

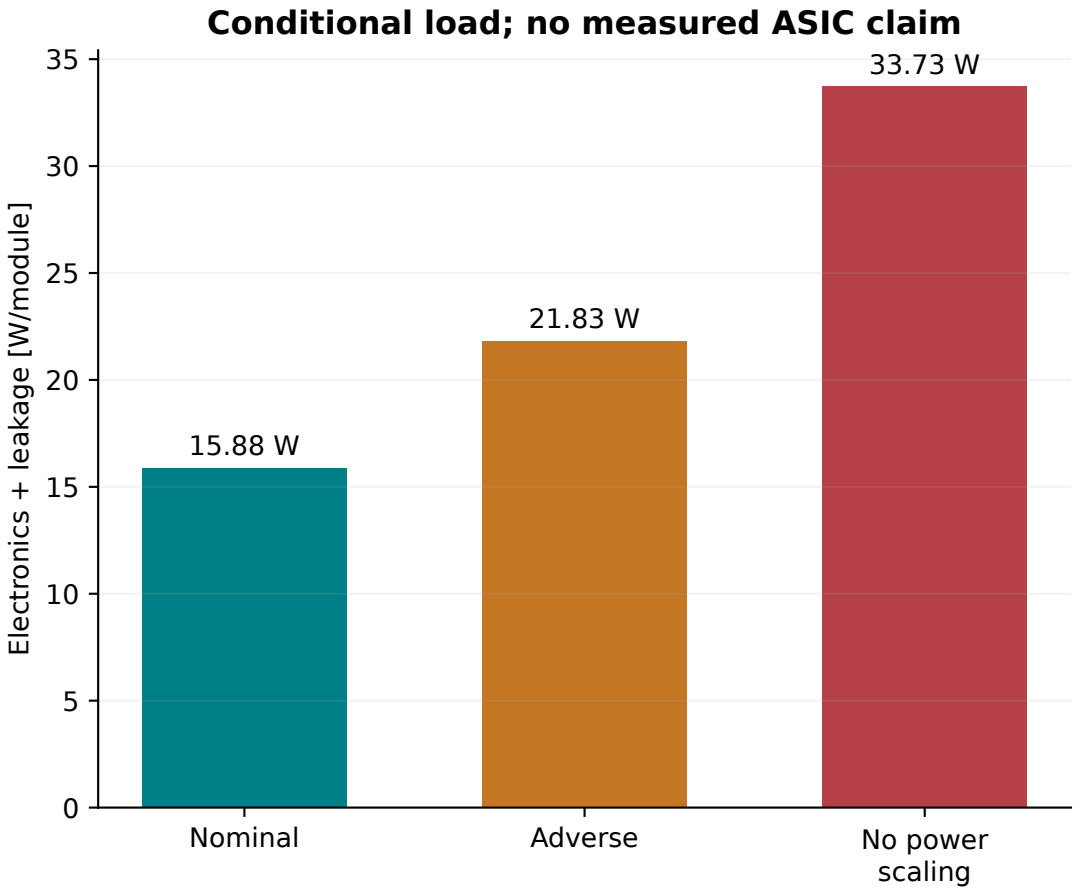


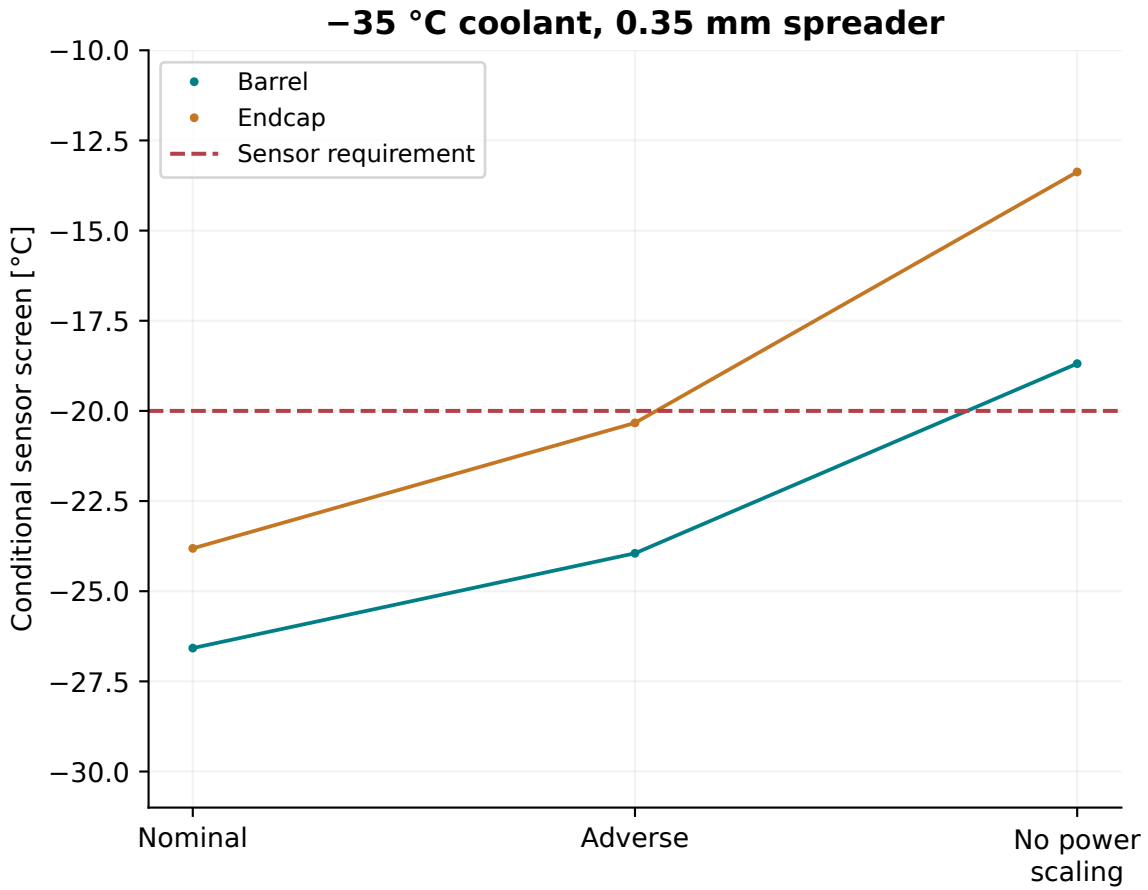


Required module redesign: two logical ASIC tiles + redistribution, thermal windows, direct inserts, insulating TIM and new power/flex protection.