

5G/6G Communication Systems- ECA5601 (LAB)

Student Name: A.SAI KIRAN

Reg no: 192312672L

Experiment 11: Implementation of IoT-based Smart Agriculture using MATLAB

Aim: To design and simulate an IoT-based smart agriculture system using MATLAB by monitoring soil moisture levels, controlling water pump status (ON/OFF), and evaluating irrigation efficiency for optimized water resource management.

Objective 1:

Program:

```
clc; clear; close all;
```

```
% Simulated soil moisture data (%)
```

```
time = 1:10;
```

```
soil_moisture = [30 35 28 25 20 18 22 30 40 45];
```

```
% Threshold for irrigation
```

```
threshold = 40;
```

```
figure
```

```
% ----- Graph 1: Soil Moisture Variation -----
```

```
subplot(2,1,1)
```

```
plot(time, soil_moisture, '-o', 'LineWidth', 2)
```

```
title('Soil Moisture Monitoring in IoT Smart Agriculture')
```

```
xlabel('Time (Hours)')
```

```
ylabel('Soil Moisture (%)')
```

```
grid on
```

```
hold on
```

```
ylime(threshold,'r--','Threshold')
```

```
% ----- Graph 2: Moisture Status (Dry/Wet Level) -----
```

```

status = soil_moisture >= threshold;

subplot(2,1,2)

stem(time, status, 'filled', 'LineWidth', 2)

title('Soil Condition Status (1=Wet, 0=Dry)')


xlabel('Time (Hours)')

ylabel('Status')

grid on

```

Output:

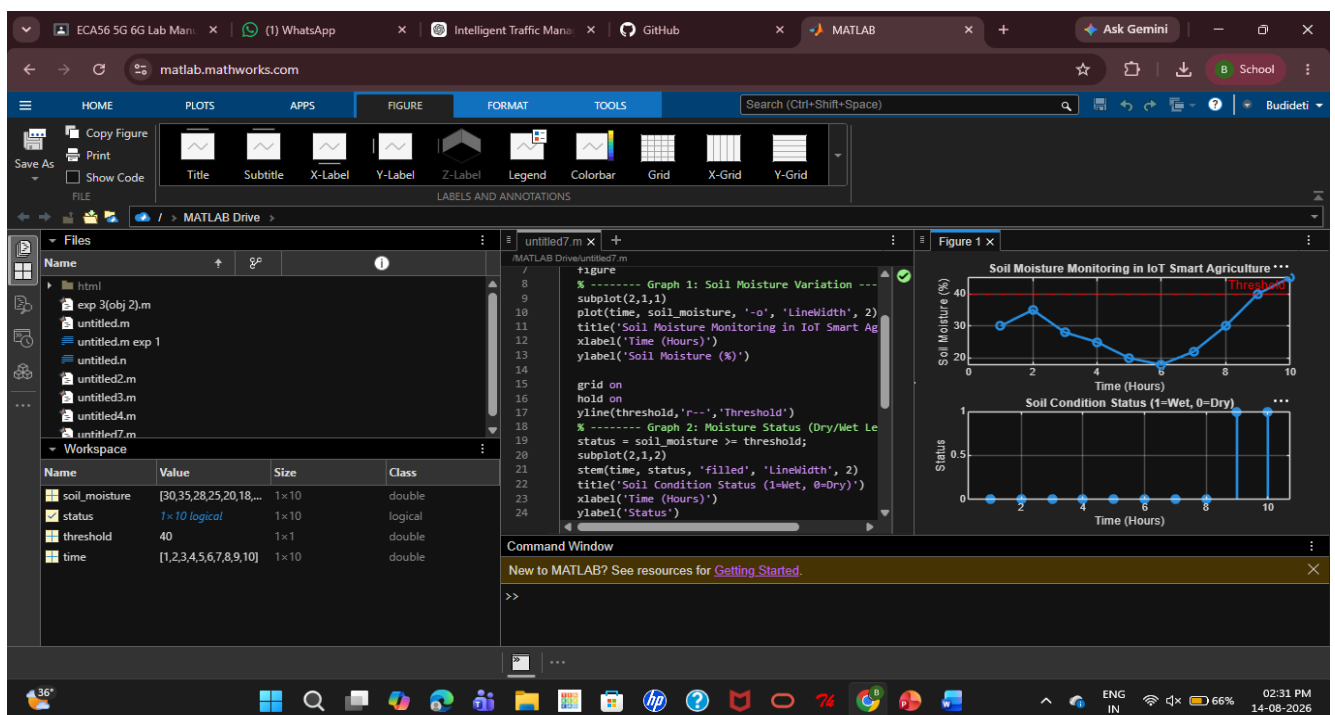

Objective 2:

Program:

```

clc; clear; close all;

% Simulated soil moisture (%)

time = 1:10;

soil_moisture = [30 35 28 25 20 18 22 30 40 45];

% Threshold level

threshold = 40;

```

```

% Pump control logic (1 = ON, 0 = OFF)
pump_status = soil_moisture < threshold;


figure

% ----- Graph 1: Soil Moisture vs Pump Status -----
subplot(2,1,1)
plot(time, soil_moisture, '-o','LineWidth',2)
title('Soil Moisture vs Pump Control')
xlabel('Time (Hours)')
ylabel('Soil Moisture (%)')
grid on
hold on
yline(threshold,'r--','Threshold')

% ----- Graph 2: Pump Status (ON/OFF) -----
subplot(2,1,2)
stem(time, pump_status, 'filled','LineWidth',2)
title('Water Pump Status (1=ON, 0=OFF)')
xlabel('Time (Hours)')
ylabel('Pump Status')
grid on

```

Output:

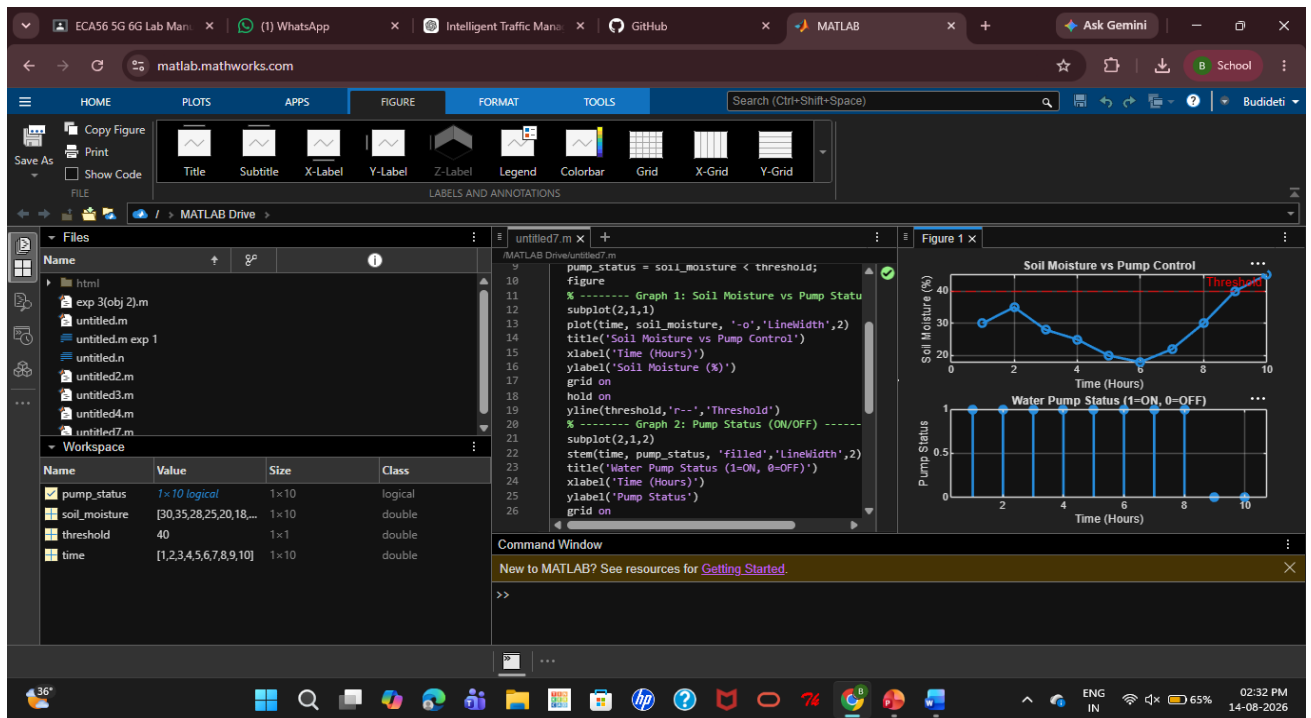

Objective 3:

MATLAB Code:

clc; clear; close all;

% Simulated soil moisture data (%)

time = 1:10;

soil_moisture = [30 35 28 25 20 18 22 30 40 45];

% Threshold level

threshold = 40;

% Irrigation efficiency calculation (%)

efficiency = (soil_moisture ./ threshold) * 100;

efficiency(efficiency > 100) = 100; % limit to 100%

figure

% ----- Graph 1: Soil Moisture vs Efficiency -----

subplot(2,1,1)

plot(time, soil_moisture, '-o','LineWidth',2)

title('Soil Moisture Variation')

xlabel('Time (Hours)')

```
ylabel('Soil Moisture (%)')
```

```
grid on
```

```
hold on
```

```
ylines(threshold,'r--','Threshold')
```

```
% ----- Graph 2: Irrigation Efficiency -----
```

```
subplot(2,1,2)
```

```
plot(time, efficiency, '-s','LineWidth',2)
```


```
title('Irrigation Efficiency (%) in Smart Agriculture')
```

```
xlabel('Time (Hours)')
```

```
ylabel('Efficiency (%)')
```

```
grid on
```

Output:

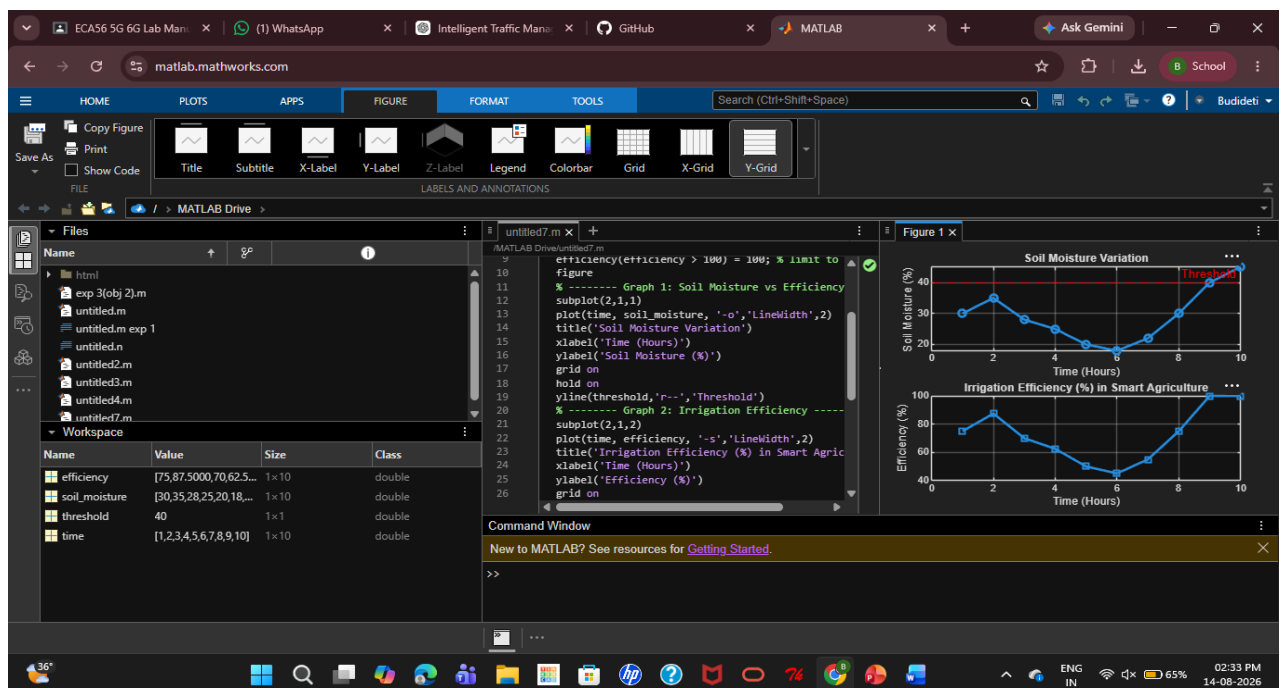

Result:

The IoT-based Smart Agriculture system was successfully simulated in MATLAB. Soil moisture was monitored, the water pump was automatically controlled based on the threshold, and irrigation efficiency was evaluated for effective water management.