

MaameDrone V1.0: top

95 x 116.5 mm, 2 layers, 6S 18-25.2 V. 12 V buck and 9 V output removed; Pi pin labels added. Power on board: 5V_AUX buck 3.5 A, J20 VBAT OUT 2 A fused, 5V_FC and 3V3 from the Kakute.

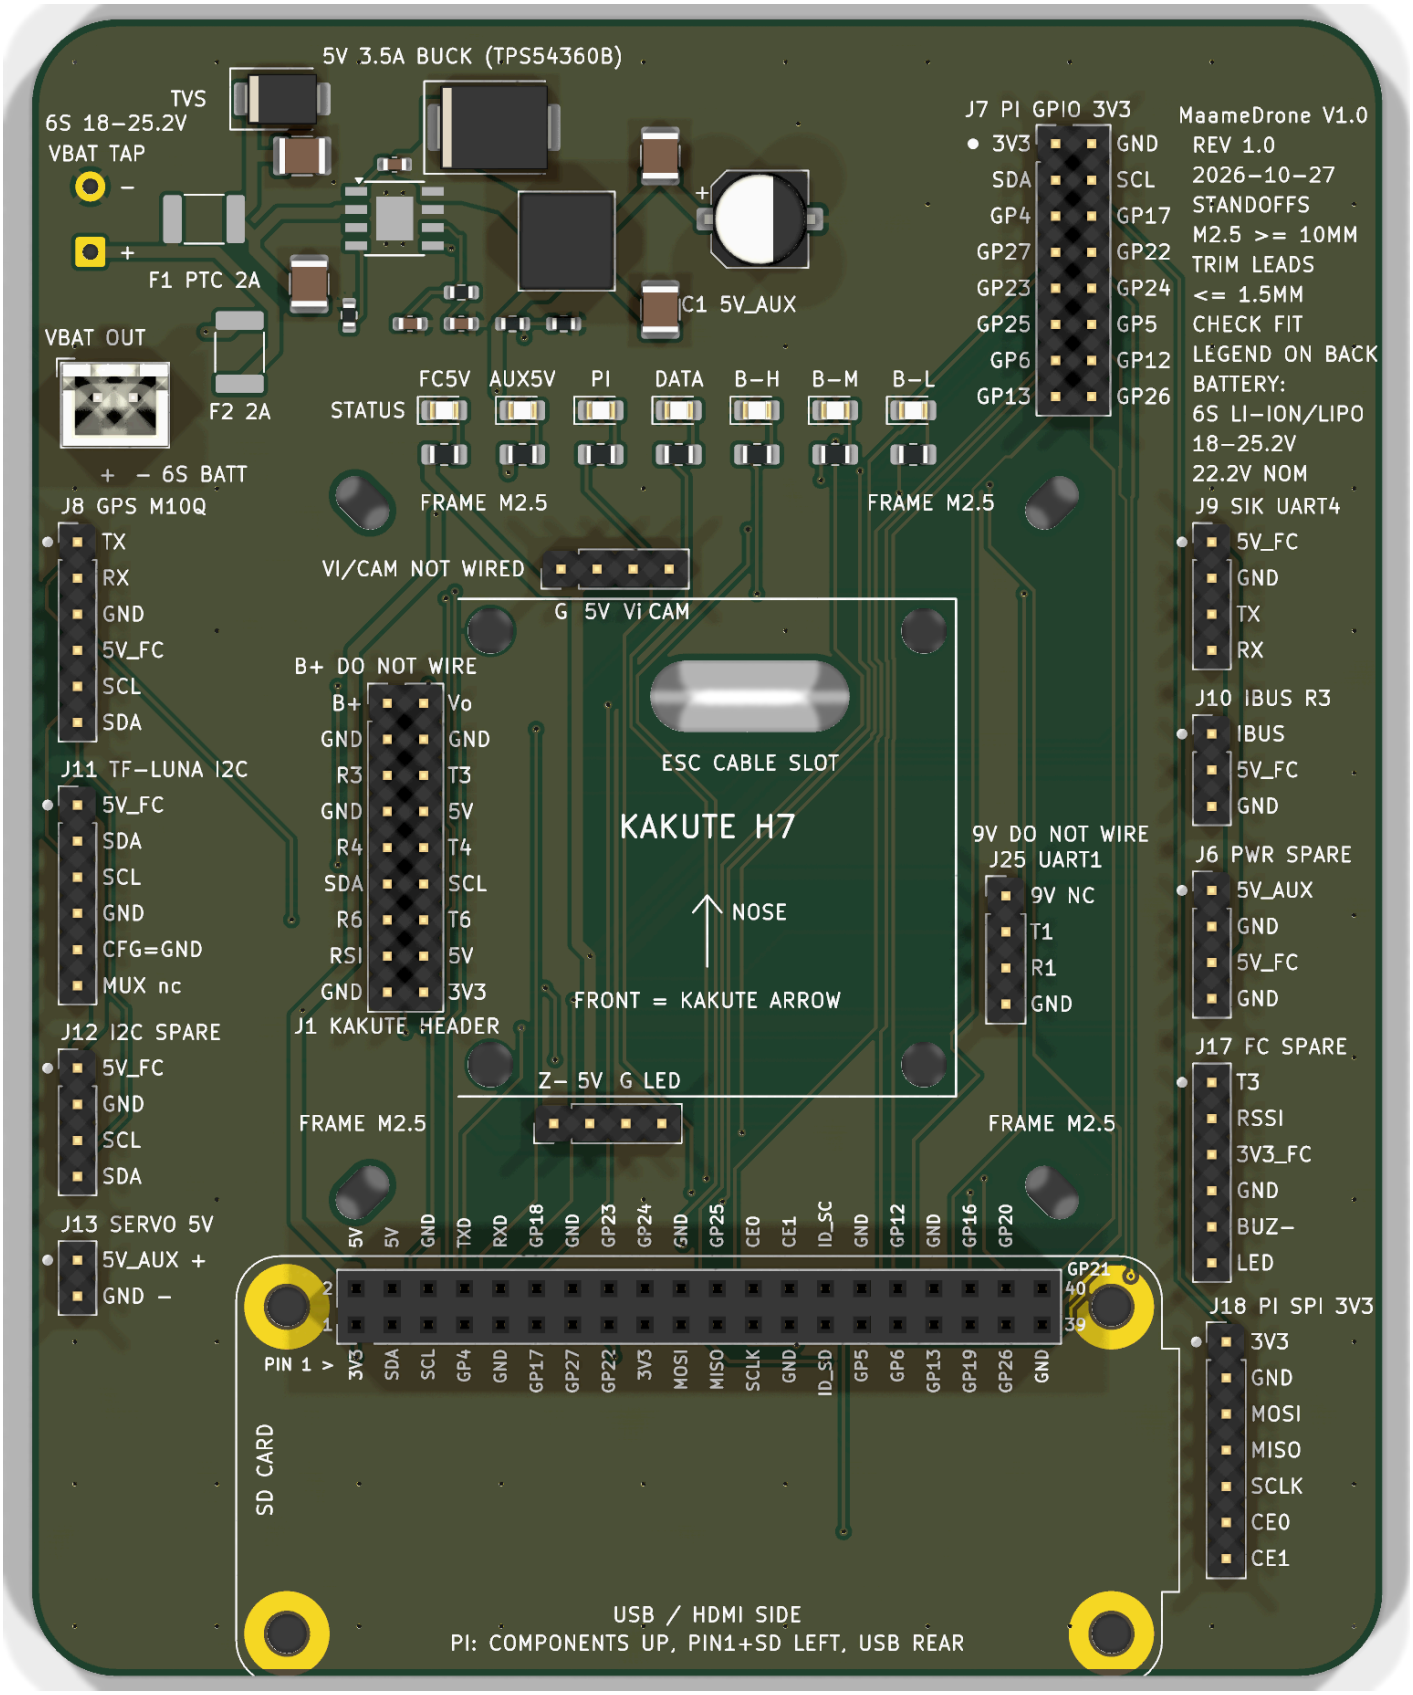

MaameDrone V1.0: 3D view

Parts as fitted by JLCPCB: 5 V buck, status LEDs, Kakute headers, Pi socket.

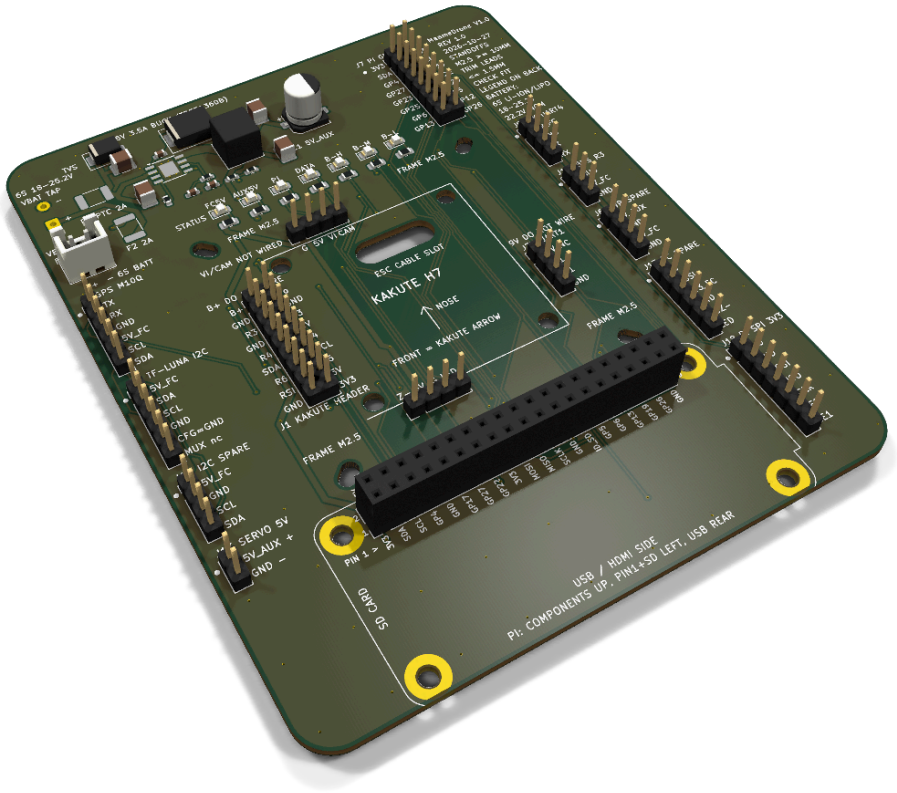

MaameDrone V1.0: bottom

Back side with the connection legend.

