



Rockstar®

Manufacturer, Exporter & Supplier of
CONSTRUCTION MATERIALS





Rockstar®


BLOCK JOINTING MORTAR



ROCKSTAR BLOCK JOINTING MORTAR

Rockstar Block Jointing Mortar Is A High-quality Semi-premix Mortar For Aac And Concrete Blocks. Made Of Cement, Graded Sand, And Polymers, It Offers Strong Bonding, Water Retention, And Stability. It Reduces Joint Thickness From 12-18mm To Just 3-5mm And Complies With ASTM C1660-09.

APPLICATION STEPS

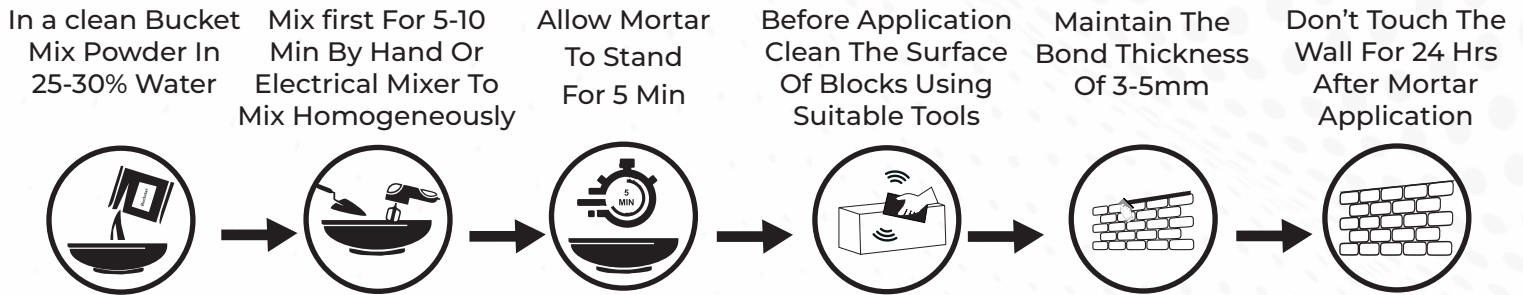

PRECUATIONS




Surface Cleanliness



Pre-Wet The Blocks



Do Not Overwater



Apply Uniform Thickness



Personal Protection



Aoid Direct Sunlight or Rain

TECHNICAL INFORMATION

Sr.	Name of Test	Result/Observations
1	Appearance	Free Flowing Grey Colour Powder
2	Water Demand	25%-30% by weight
3	Application	Mixed paste can be applied by trowel
4	Thickness	3-5 mm on AAC Blocks
5	Touch Dry	40-60 minutes on ACC Blocks
6	Compressive Strength 7 Days	3-4N/mm ³
7	Compressive Strength 28 Days	5-7N/mm ²
8	Pull Of strength	0.62N/mm ²
9	Bulk Density	1200-1300kg/m ³
10	Pot Life	Approx.300 mins.



COVERAGE

Block Size	Unit	Coverage Area
(100 x 240 x 625)mm	Sq.ft	130 - 140
(125 x 240 x 625)mm	Sq.ft	115 - 130
(150 x 240 x 625)mm	Sq.ft	105 - 115

- Coverage Varies Based On Block Size, Joint Thickness, Surface Level, And Workmanship.
- Under Normal Conditions, The 40 kg bag for 3-5 mm Thickness Will Be As given.

Tile Adhesive



ROCKFIX
100, 200, 300

High Quality
Tile Adhesive Range

Available In
Grey & White



ROCKSTAR TILE ADHESIVE (ROCKFIX 100,200,300)

Rockfix 100 (Type 1) Is Grey Cement Based Tile Adhesive Used For Fixing Small Sized Ceramic & Mosaic Tiles For Internal Application. Preferred By Professional Builders, Contractors, And Architects.

Rockfix 200 (Type 2) Grey cement-based tile adhesive used for fixing medium-sized ceramic and vitrified tiles for internal wall & floor applications and external floor use.

Rockfix 300 (Type 3) High-performance, polymer-modified tile adhesive designed for superior bonding and long-lasting durability. suitable for fixing ceramic, vitrified tiles and natural stones.—trusted by professional builders, contractors, and architects.



TECHNICAL INFORMATION

Sr.	Name of Test	Unit	ROCKFIX100	ROCKFIX200	ROCKFIX300
1	Water Demand	%	26.3	30.40	26.3
2	Open Time	Minute	30	25	30
3	Adjustability	Minute	35	30	35
4	Pot Life	Minute	300	390	360
5	Setting Time	Hours	24	24	24
6	Shear Strength Dry (28) Days	N/mm ²	1.14	1.34	1.87
7	Shear Strength Wet (28) Days	N/mm ²	1.10	1.18	1.22
8	Shear Strength Heat Aging (28) Days	N/mm ²	0.72	1.28	1.44
9	Tensile Strength Dry (28) Days	N/mm ²	0.48	1.27	1.54
10	Pull Out Adhesion (28) Days	N/mm ²	0.68	1.00	1.52

Standard: As per IS 15477:2019

COVERAGE

- A 20kg Bag of Rockstar - ROCKFIX Tile Adhesive Gives 20-25 sq.ft Coverage Of 6mm Thickness.



PREMIX PLASTER

**PREMIX PLASTER
(M SAND)**

**PREMIX PLASTER
(RIVER SAND)**



#Crafting Beauty, Layer by Layer...

ROCKSTAR PREMIX PLASTER (M SAND) & (RIVER SAND)

Rockstar Premix Plaster High-quality, Ready-to-use, Water-resistant, Polymer-modified Cement Plaster. Easy To Apply; Crack, Water, And Weather Resistant. Suitable For All Climates. Ideal For AAC/CLC Blocks, Fly Ash/red Bricks, Stone Walls, And Concrete An Excellent Alternative To Traditional Cement-Sand Plaster.

APPLICATION STEPS

Surface Must Be Clean, Free From Oil, Paint, Loose Plaster, Or Dust



Mix 1 Bag Plaster With 6-7l Water



Apply Cement Slurry, Roughen Smooth Surface



Apply Mixture On Wet Slurry, Level With Tools



For 2nd Coat, Groove 1st Coat, Level After Final Coat



Cure Plaster 2-3 Times Daily For 7 Days



PRECUATIONS



Dirty Or Dusty Surface



Uneven Surface



Check Moisture



Avoid Direct Sunlight Or Rain



Personal Protection

TECHNICAL INFORMATION

Sr.	Name of Test	M SAND	RIVER SAND
1	Appearance	Greyish Granular Powder	Greyish Granular Powder
2	Water Demand	20-25% by Weight	20-25% by Weight
3	Initial Setting Time	95 Minutes	95 Minutes
4	Final Setting Time	235 Minutes	235 Minutes
5	Touch Dry	40-60 minutes on ACC Blocks	40-60 minutes on ACC Blocks
6	Compressive Strength 7 Days	5-6 N/mm ²	5-7 N/mm ²
7	Compressive Strength 28 Days	8-10 N/mm ²	8-10 N/mm ²
8	28 Day Pull off force	0.5 N/mm ²	0.5 N/mm ²
9	Bulk Density	1700 – 1800 kg/m ³	1700 – 1800 kg/m ³
10	Pot Life	30 minutes	30 minutes

COVERAGE

M SAND

- For Aac/ Clc Blocks 10-12mm Thk.-covers 16-18 Sq.ft.(approx)
- For Fly Ash Bricks 10-15mm Thk.-covers 12-15 Sq.ft.(approx)


RIVER SAND

- For Aac/ Clc Blocks 10-12mm Thk.-covers 16-20 Sq.ft.(approx)
- For Fly Ash Bricks 10-15mm Thk.-covers 14-16 Sq.ft.(approx)





STUCCO PLASTER



“Engineered for Flawless Walls.”

ROCKSTAR STUCCO PLASTER

Rockstar® Stucco Plaster is a ready-mix cement based polymer modified thin plaster designed for smooth finishing of interior and exterior walls. It contains graded sand, cement and special additives for better bonding, smooth finish and faster application. Suitable for brick walls, AAC blocks and concrete surfaces.

FEATURES & BENEFITS




High Bond Strength




Uniform Smooth Finish



Thin Layer Application



Fast Application



Ready for Paint in 24 hrs

APPLICATION STEPS



Clean the surface



Lightly wet the surface



Mix with 20-30% clean water



Apply using a steel trowel



Spread evenly (3-6 mm thickness)

AREAS OF APPLICATION

- Interior wall plastering • Exterior wall finishing • Brick masonry walls • Concrete surfaces
- AAC / Block walls • Columns and beams finishing

TECHNICAL INFORMATION

Sr.	Name of Test	Result/Observations
1	Bulk Density	1450-1550 Kg/m ³
2	Water Powder Ratio	25% - 30%
3	Pot Life	Approx 120 Minutes @ 27 ° C
4	Compressive Strength 28 day	5 - 6 N/mm ²
5	Coverage	Approx. 60sq.ft per 25 kg bag (3 mm thickness)
6	Layer Thickness	3 - 6 mm
7	Water Curing	Not Required
8	Adhesion Strength	-0.8 N/mm ²
9	Water Absorption	Low



COVERAGE

- For AAC/CLC blocks 3-6 mm thk. - Covers 58- 60 sq.ft. (approx).

SHELF LIFE & STORAGE

Shelf life is 6 months from the date of manufacturing in packed bags. Store the material in cool, dry and shaded place.

Rockstar®

HACKOPLAST

Plaster Hacking Agent

*Bond Between
Concrete And Plaster*



Superior
grip



Self curing
saves labour
& time



Improves quality and
service life of plaster



Preserve the bond
between concrete & plaster



Cost Effective
& user friendly

ROCKSTAR HACKOPLAST HACKING AGENT

Rockstar Hackoplast Hacking Agent Is A Unique Single-component Liquid Bonding Agent For Plaster That Strengthens The Bond Between The Plaster And Concrete. The New Way To Increase Speed And Improve Quality Of Plastering.

USES & APPLICATION

- Bond Between Concrete And Plaster.
- Bond Between Concrete And Concrete.
- Bond Between Concrete And Ceramic/Glaze Tile.
- Bond For Gunning Applications.

SURFACE PREPARATION




Clean The Surface With A Water Jet Thoroughly To Remove Dirt, Loose Particles, Etc.




Moisten The Surface With Water



Apply A Coat Of Hackoplast And Cement



When The Surface Becomes Tacky, Apply A Dash-Coat Of Cement Mortar Within 10 Minutes.



Check And Ensure That The Surface Is Tacky Before Application.



Plaster The Surface Or Place The Concrete In The Usual Manner After Setting The Chat / Dash.

TECHNICAL INFORMATION

Sr.	Name of Test	Result/Observations
1	Appearance	Milky White Liquid
2	Specific Gravity	1.00 ± 0.005
3	Bond Strength	7 days > 0.20 Mpa
4	Drying Type	Air drying
5	Solid Content	40 - 41 %

COVERAGE

- 5 To 6 Sq.m Per Litre On A Fairly Smooth Surface When Applied By Spray Mixed With Cement.
- 6 To 6.5 Sq.m Per Litre On A Fairly Smooth Surface When Applied By Spray Directly.



Rockstar® *Rockbond* BONDING AGENT



“Bond Better. Build Stronger.”

ROCKSTAR ROCKBOND-BONDING AGENT

Rockstar Rockbond Serves As An Excellent “bonding Agent” On The Rcc Background And The Internal Gypsum Based Or Any Other Plaster Based Wall Lining. Rockbond Is Specially Formulated As A Plaster Bonding Agent For Pre – Treatment Of Smooth Backgrounds. Hence, Removing The Need To Physically Develop The Surface By Hacking Or Any Other Methods.

KEY FEATURES AND BENEFITS




Excellent bonding to RCC, concrete, and other surfaces.




Single Coat Application




Faster Application



High Strength & Water Retention



Green colour For Identification




Better Bond Strength


APPLICATION STEPS




Clean dust and loose particles and repair any surface faults to stop moisture penetration.




Mix Material Well With A Clean Rod To Evenly Distribute Particles



Use A Good-quality Paint Brush & Clean It Thoroughly With Fresh Water



Pre-wet The Surface With Brush Or Roller Just Before Applying Rockbond



Let It Dry Completely For About 24 Hours

TECHNICAL INFORMATION

Sr.	Name of Test	Result/Observations
1	Setting Time	24 Hrs
2	Color	Green
3	Bond Strength	> 1 Mpa*
4	Type	Solution with suspended solid

COVERAGE

- A 1 Kg Of Rockstar™ Rockbond Gives ~35-40 Sq. Ft Of Coverage.



Our Key Clients



Head Off : Vishwa Vimal Complex, Opp. Hyundai Kothari Showroom, Next to Titan I plus Showroom, Magarpatta-Kharadi road, Kharadi, Pune - 411014. Maharashtra, India.

Contact : +91 85 2687 2687 | contact@asbspl.com | www.asbspl.com

A S BUILDING SOLUTIONS PVT. LTD. rockstar_asbspl Rockstar A S Building Solutions Pvt. Ltd.

U.P. | Delhi | Maharashtra