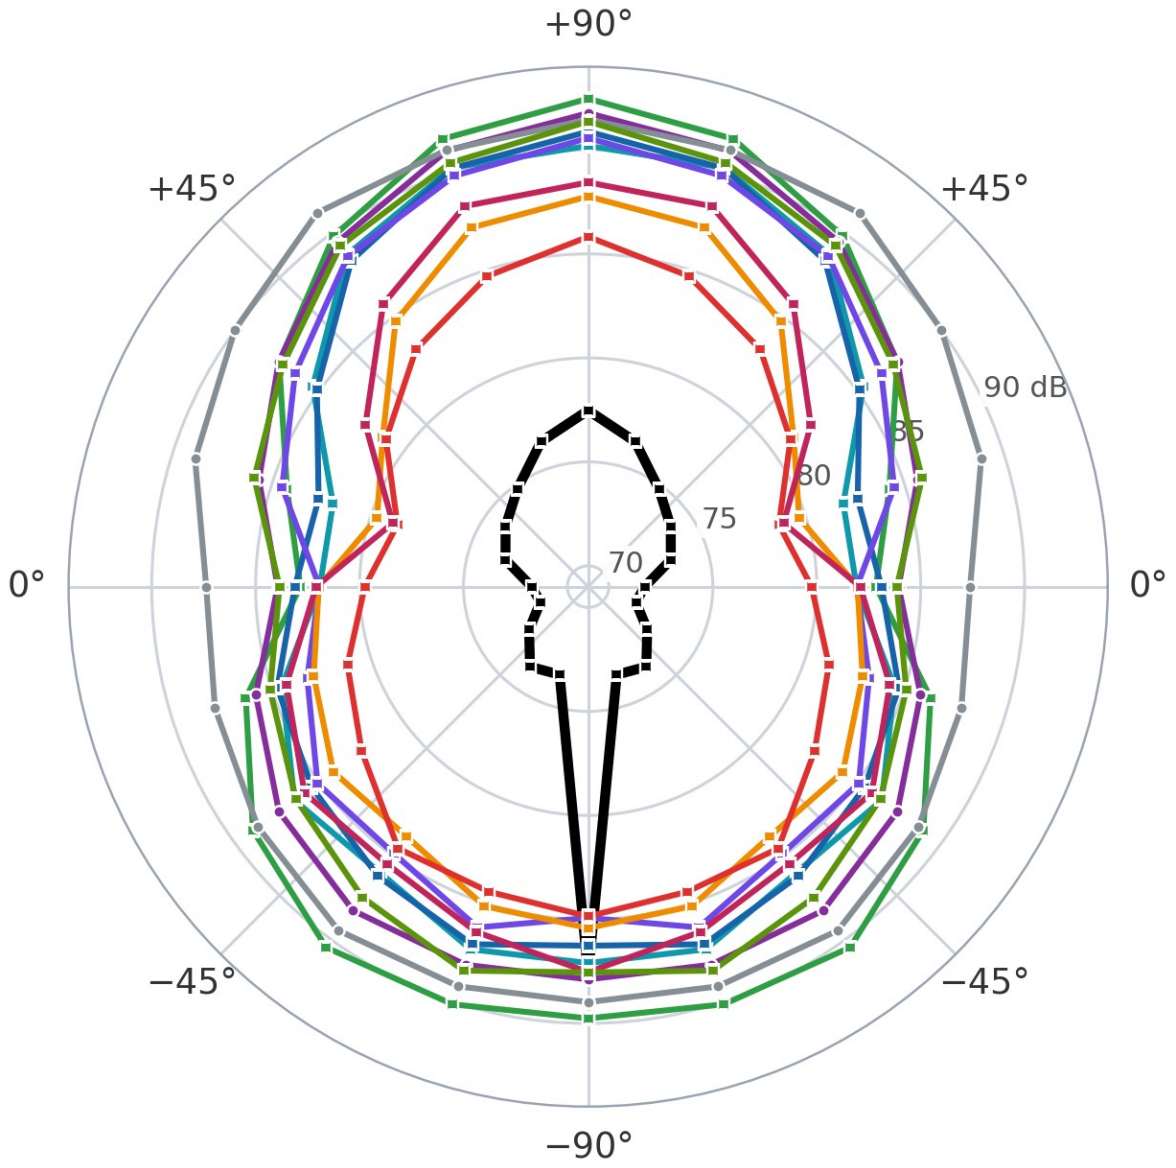


THE MEMBRANES

Membranes at 2000 µs

Mean level. Round markers: 8 Oct. Square: 9 Oct.

Bare prop	9 Oct	75.1 dB
Thinsulate, 4 layers	9 Oct	82.8 dB
Thinsulate, 2 layers	9 Oct	84.0 dB
Thinsulate, 8 layers	9 Oct	85.0 dB
Felt + rubber	9 Oct	86.0 dB
Felt	9 Oct	86.3 dB
Felt, double layer	9 Oct	86.4 dB
Duct + PU foam, double	9 Oct	87.5 dB
PU foam	8 Oct	87.9 dB
Cork	9 Oct	88.5 dB
Duct, membrane only	8 Oct	89.5 dB

up to 10.2 dB

best against worst membrane set-up (Thinsulate, 4 layers and Duct, membrane only), at +18°; 6.7 dB on average

Thrust at 2000 µs: bare prop 3.75 N. The quietest other set-up, Thinsulate 4 layers, only 0.39 N.

8 and 9 Oct 2026, 5-inch 3-blade propeller, 500 Hz–24 kHz, 2000 µs, mean of 3 repeats, corrected files. Axis 69–94 dB. Not comparable with slide 8.