Cisco № 5


```
Switch(config)#int fal/1
Switch(config-if)#svitchport mode access
                         ^
% Invalid input detected at '^' marker.

Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 2
Switch(config-if)#exit

 Switch(config)#int fa0/1
 Switch(config-if)#switchport mode access
 Switch(config-if)#switchport access vlan 2
 Switch(config-if)#exit

Switch(config)#int fa2/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 3
Switch(config-if)#exit
Switch(config)#int fa3/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 3
Switch(config-if)#exit
Switch(config)#
```
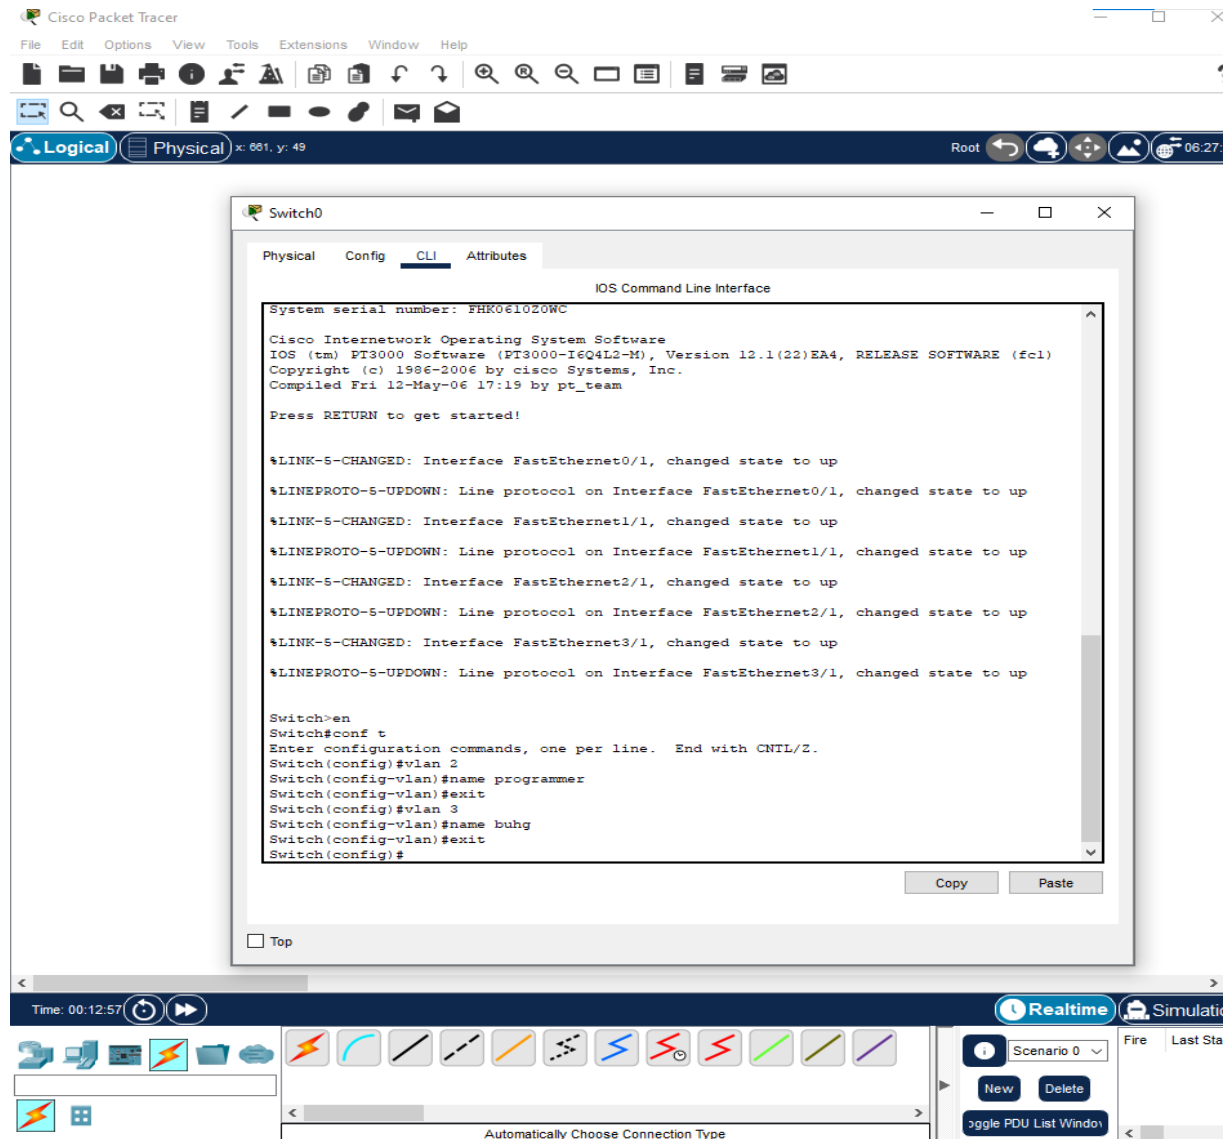
Команда ping

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.1

Pinging 192.168.0.1 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Request timed out.
```

Отправка пакета данных: