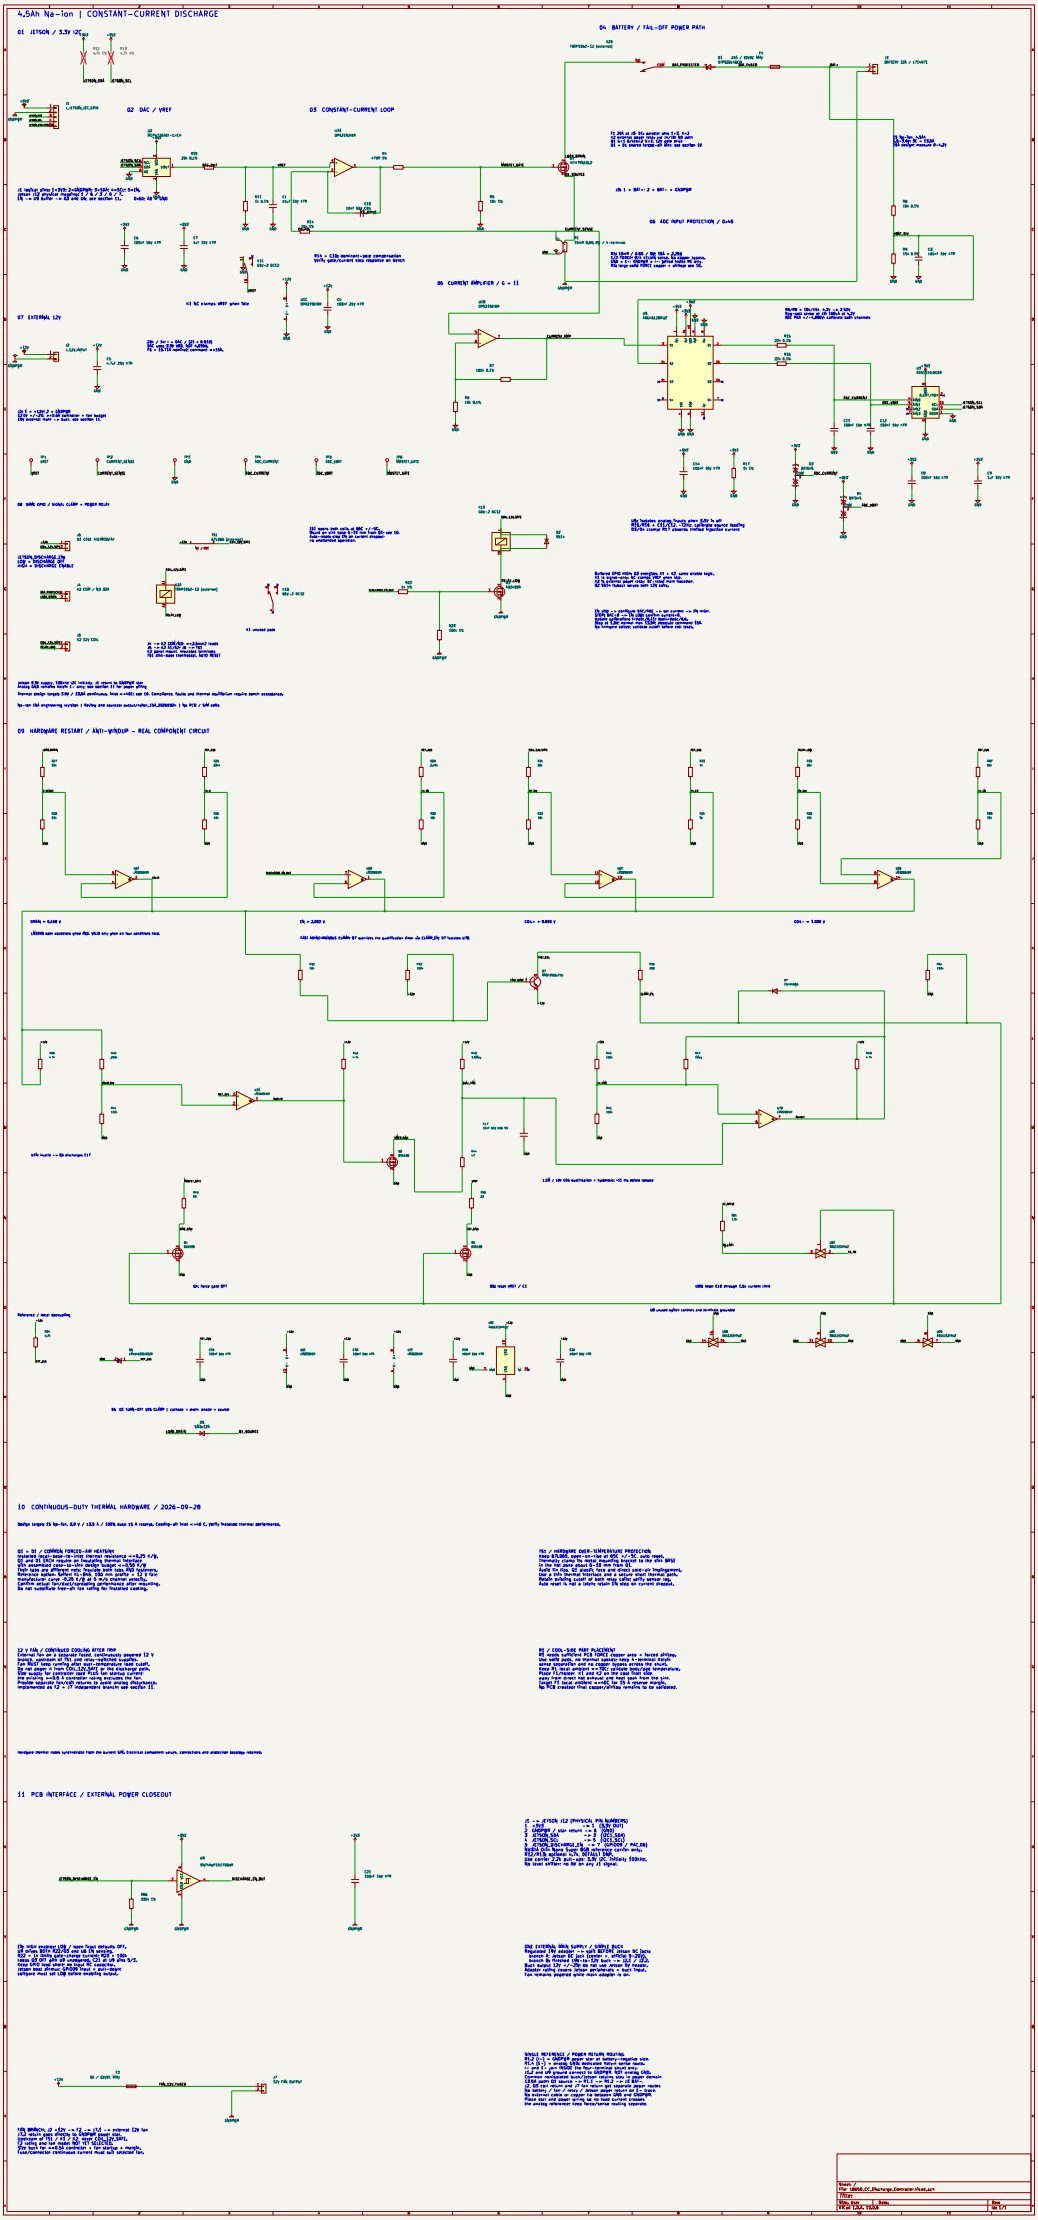

4.5Ah Na-Ion | CONSTANT-CURRENT DISCHARGE
01 JETSON / 3.3V I2C
02 DAC / VREF
03 CONSTANT-CURRENT LOOP
04 BATTERY / FAIL-OFF POWER PATH
05 CURRENT AMPLIFIER / G = 11
06 ADC INPUT PROTECTION / OVR
07 EXTERNAL 12V
08 GATE DRV / SIGNAL CLAMP + MOSFET HOLD
09 HARDWARE RESTART / ANTI-WINDUP — REAL COMPONENT CIRCUIT
10 CONTINUOUS-DUTY THERMAL HARDWARE / 2026-09-28
11 PCB INTERFACE / EXTERNAL POWER CLOSEOUT