

USB-C FOR POWER AND PROGRAMMING TO ATMEGA32U4 MCU





PROGRAMMER/ISP/FLASH With RESET BUTTON

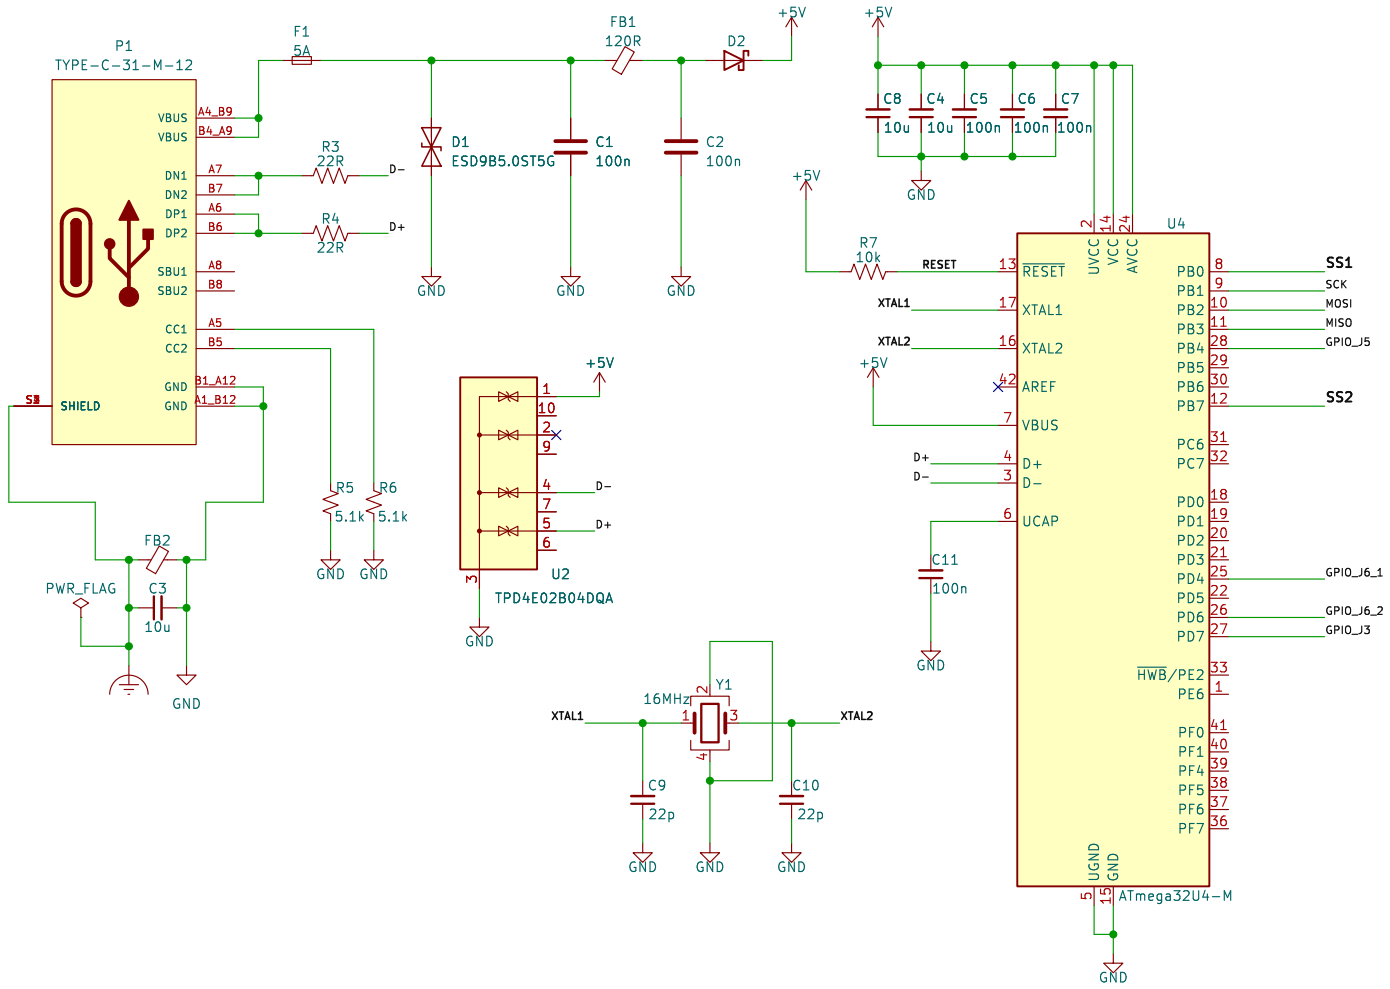


SPI Version – Dual Die – Application Diagram For MLX90316KDC-BCG-200-TU Hall Effect Sensor

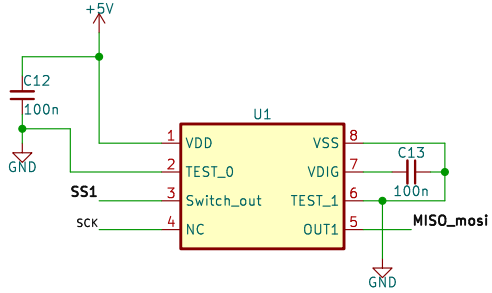


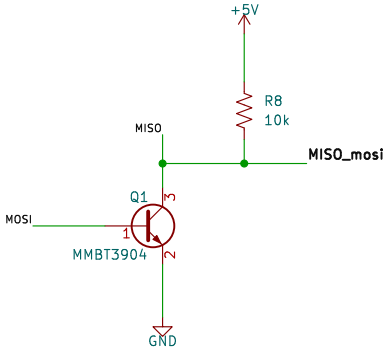

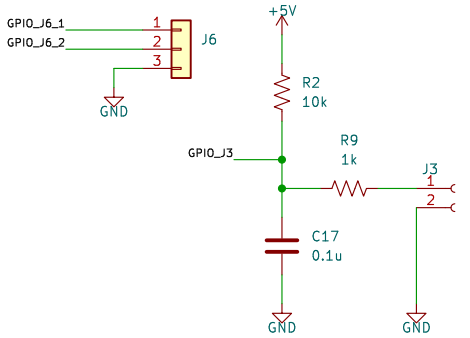



Second Hall Effect Sensor Connector



H1 H2 H3 H4

Notes:
Serial Protocol
Generic schematics for dual slave applications are described.
Pg 40 of the MLX90316KDC-BCG-200-TU datasheet

Sheet: /
File: ThrottleControllerMainRev.kicad_sch

Title:

Size: A4	Date:	Rev:
KiCad E.D.A. kicad 7.0.5		Id: 1/1