



**UNIVERSITY
OF ICELAND**

Meteorological Conditions and Rural Injury Accidents in Iceland

Analysis of Accident Frequency and Traffic, 2007–2025

Ásgeir Snær Magnússon

September 2026

M.Sc. thesis
in Software Engineering

Meteorological Conditions and Rural Injury Accidents in Iceland

Analysis of Accident Frequency and Traffic, 2007–2025

Ásgeir Snær Magnússon

30 ECTS thesis submitted in partial fulfilment of a
Master of Science degree in Software Engineering

Supervisors
Kristján Jónasson
Guðmundur Freyr Úlfarsson

Faculty of Industrial Engineering, Mechanical Engineering and Computer Science
School of Engineering and Natural Sciences
University of Iceland
Reykjavík, September 2026

Meteorological Conditions and Rural Injury Accidents in Iceland
(Meteorological Conditions and Rural Injury Accidents)
Analysis of Accident Frequency and Traffic, 2007–2025

30 ECTS thesis submitted in partial fulfilment of a M.Sc. degree in Software Engineering

Faculty of Industrial Engineering, Mechanical Engineering and Computer Science
School of Engineering and Natural Sciences
University of Iceland
Dunhagi 5
107, Reykjavík, Iceland
Telephone: 525 4000

Bibliographic information:

Ásgeir Snær Magnússon (2026). *Meteorological Conditions and Rural Injury Accidents in Iceland*, M.Sc. thesis, Faculty of Industrial Engineering, Mechanical Engineering and Computer Science, University of Iceland.

Copyright © 2026 Ásgeir Snær Magnússon

This thesis may not be copied in any form without author permission.

Reykjavík, Iceland, September 2026

Abstract

This study examines whether rural injury accidents in Iceland occur disproportionately during strong wind. Accident records from 2007–2025 were linked to nearby weather observations. The primary analysis compared observed accident counts with those expected from the local frequency of each weather condition. Two further analyses examined the role of traffic: an approximate adjustment for changes in traffic during adverse weather, and a separate comparison of accident rates using daily traffic counts and estimated distance travelled. Mean wind was the primary weather measure; gust and temperature provided complementary comparisons.

Strong wind was over-represented at accident times. At mean wind speeds of at least 20 m/s, the observed-to-expected accident ratio (O/E) was 2.15. Counters showed lower traffic in strong wind. Accounting approximately for this reduction strengthened rather than removed this pattern. The separate traffic-based rate analysis pointed in the same direction, although its highest-wind intervals contained few accidents. Gust showed a similar pattern, while temperature associations were less consistent across methods.

The findings support an association between strong wind and rural injury accidents, not a causal effect. Weather observations cannot fully describe conditions on the road, and the traffic analyses rely on selective counter coverage and estimated exposure within each day. Hourly traffic data with broader geographic coverage would be needed for a direct national estimate of accident risk per distance travelled.

Ágrip

Rannsóknin fjallar um tengsl veðurs og umferðarslysa með meiðslum í dreifbýli á Íslandi á árunum 2007–2025. Kannað var hvort slys væru hlutfallslega algengari í miklum vindi en við önnur veðurskilyrði. Slysaskrár voru tengdar veðurmælingum frá nálægum stöðvum og fjöldi slysa borinn saman við þann fjölda sem vænta mætti miðað við hversu oft viðkomandi veður kom fyrir á hverjum stað. Einnig var tekið tillit til þess að umferð getur minnkað í slæmu veðri. Annars vegar var samanburðurinn leiðréttur með hliðsjón af gögnum um daglega umferð og hins vegar var slysatíðni metin miðað við áætlaðan akstur á vegum þar sem umferðarteljarar voru til staðar.

Slys reyndust hlutfallslega algengari í miklum vindi. Við meðalvindhraða 20 m/s eða meiri var hlutfall skráðs og væntanlegs fjölda slysa 2,15. Umferðarmælingar sýndu minni umferð í sterkum vindi og leiðrétting vegna þess styrkti þetta mynstur. Samanburður við áætlaðan akstur benti í sömu átt, en fá slys lágu að baki niðurstöðum fyrir mesta vindinn. Svipuð tengsl komu fram fyrir vindhviður. Niðurstöður fyrir hitastig voru óreglulegri og háðari greiningaraðferð.

Niðurstöðurnar sýna tengsl en staðfesta ekki að vindur hafi valdið slysum. Veður á mælistöð lýsir ekki alltaf aðstæðum á vegi og umferðarteljarar ná hvorki til allra vega né allra tímabila. Þar að auki lágu ekki fyrir umferðartölur eftir klukkustundum. Víðtækari og nákvæmari umferðarmælingar þarf því til að meta slysaáhættu á hvern ekinn kílómetra fyrir landið allt.

Contents

Abstract	v
Ágrip	vi
Abbreviations	xiii
1 Introduction	1
1.1 Context and Motivation	1
1.2 Aim and Research Questions	1
1.3 Thesis Outline	2
2 Background	3
2.1 Wind and Rural Road Accidents	3
2.2 Temperature, Daylight, and Time of Day	3
2.3 Traffic and Accident Rates	4
3 Data and Methods	5
3.1 Data	5
3.1.1 Source Data	5
3.1.2 Accident Data	6
3.1.3 Weather Data	7
3.1.4 Traffic Data	9
3.1.5 Selection Summary	10
3.1.6 Descriptive Accident Patterns	10
3.2 Data Preparation and Reproducibility	10
3.3 Analysis	12
3.3.1 Q1: Weather-Frequency Comparison	12
3.3.2 Use of Traffic Data	13
3.3.3 Q2: Approximate Traffic Correction to O/E	14
3.3.4 Q3: Traffic-Based Accident Rates	14
3.3.5 Supporting Matched-Time Comparison	16
3.3.6 Supporting Road-Section Traffic Comparison	17
3.3.7 Supporting Allocated Daily-Counter Model	17
4 Results	19
4.1 Study Sample and Coverage	19
4.2 Weather-Frequency Baseline	21
4.2.1 Mean Wind	21
4.2.2 Wind Gust	21
4.2.3 Temperature	21

4.3	Traffic Response and Approximate O/E Correction	25
4.3.1	Traffic Behaviour and the Baseline Limitation	25
4.3.2	Full-Period Correction	27
4.3.3	Period Comparison and Counter-Era Correction	30
4.4	Counter-Based Accident Rates	34
4.4.1	All Year Rates	34
4.4.2	Mean Wind by Season	36
4.4.3	Wind Gust by Season	37
4.5	Same-Day Weather Allocation Sensitivity	38
4.6	Secondary Robustness Checks	43
4.6.1	Matched-Time and Secondary Weather Checks	43
4.6.2	Supporting Traffic Models	43
5	Discussion	45
5.1	Interpretation	45
5.2	Strengths	46
5.3	Limitations	46
5.4	Future Work	47
6	Conclusion	49
A	Supporting Checks	53
A.1	Accident Characteristics	53
A.2	Adjusted Severity Model	53
A.3	Supporting Allocated Daily-Counter Sample	55
A.4	Traffic Sensitivity Checks	56

List of Figures

3.1	Locations of rural injury accidents and strong-wind matches.	7
3.2	Rural injury accidents by hour, season, daylight, and temperature.	11
4.1	Annual rural injury-accident counts and weather-match coverage.	20
4.2	All-year and seasonal mean-wind O/E, 2007–2025.	22
4.3	All-year and seasonal wind-gust O/E.	23
4.4	All-year and seasonal temperature O/E.	24
4.5	Daily traffic relative to calendar expectation.	26
4.6	Original and traffic-corrected mean-wind O/E.	27
4.7	Original and traffic-corrected wind-gust O/E.	28
4.8	Traffic-corrected O/E by injury group.	29
4.9	All year weather-frequency O/E, 2007–2018.	31
4.10	All year weather-frequency O/E, 2019–2024.	32
4.11	Traffic-corrected All year O/E by injury group, 2019–2024.	33
4.12	Counter-based wind and gust rates, All year.	35
4.13	Traffic-based mean wind rates by season.	36
4.14	Traffic-based gust rates by season.	37
4.15	Same-day weather allocation sensitivity, All year.	39
4.16	Same-day mean-wind allocation sensitivity by season.	40
4.17	Same-day gust allocation sensitivity by season.	41
4.18	Same-day temperature allocation sensitivity by season.	42
A.1	Registered vehicles involved in rural injury accidents.	53
A.2	Accident-type composition by injury severity.	54
A.3	Coverage of the supporting allocated daily-counter sample.	56

List of Tables

3.1	Source datasets. The study period is 2007–2025.	5
3.2	Definitions used throughout the thesis.	6
3.3	Example of a cleaned rural injury-accident record.	7
3.4	Weather-match coverage and distance.	8
3.5	Wind-data scope and quality audit, 2007–2025.	8
3.6	Official traffic averages and the spring/autumn daily traffic value used in the annual-traffic analysis.	9
3.7	Overview of data selection.	10
3.8	Data preparation and analysis workflow.	12
3.9	Comparison of the main monthly-frequency allocation and same-day sensitivity.	16
4.1	Analysis sample sizes.	19
4.2	Selection for the Q3 traffic-based rate analysis.	20
4.3	Q3 monthly-frequency daily-counter rates, 2019–2024.	34
4.4	Headline Q1–Q3 wind and gust results.	38
4.5	Selected matched-time contrasts.	43
A.1	Adjusted model of injury severity.	55
A.2	Selection of accidents for the supporting allocated daily-counter model.	55
A.3	Characteristics of accidents retained and excluded by the linkage used for the supporting allocated daily-counter model.	56
A.4	Upper-bin estimate from the supporting allocated daily-counter model under three assignment distances.	57
A.5	Sensitivity and quality checks for the supporting traffic analyses.	57

Abbreviations

ADU	Average annual daily traffic.
CI	Confidence interval.
O/E	Observed-to-expected accident ratio.
OR	Odds ratio.
RR	Rate ratio.
SDU	Summer daily traffic, June–September.
VDU	Winter daily traffic, December–March.
VHDU	Spring/autumn daily traffic derived from ADU, SDU and VDU.
VKT	Vehicle-kilometres travelled.

1 Introduction

1.1 Context and Motivation

Weather affects both driving conditions and the decision to travel. Strong wind can make a vehicle harder to control, low temperature can coincide with slippery roads, and darkness can reduce visibility. These conditions are relevant to Icelandic roads, where terrain can produce substantial local variation in wind (Snæbjörnsson et al., 2007; Pu et al., 2018). Precipitation and fog are also relevant road-weather hazards, but they are context for this study and are not analysed here.

Previous research provides two reasons to examine wind. Engineering studies describe mechanisms by which crosswind can destabilise vehicles, while observational studies compare accident occurrence with the frequency of windy conditions (Baker, 1986, 1994; Edwards, 1994). These are complementary forms of evidence: a physical mechanism does not establish how often accidents occur across a road network. Reviews also find less consistent road-safety evidence for wind than for precipitation (Theofilatos and Yannis, 2014). Local evidence is therefore needed to determine whether the same pattern is present on Icelandic roads.

In Iceland, wind-related road safety has been studied using vehicle-reliability analyses and operational vehicle-wind models (Snæbjörnsson et al., 2007; Hrafnkelsdóttir, 2020). This thesis addresses a different question: whether rural injury accidents are over-represented under particular weather conditions relative to how often those conditions occur locally. It then examines how the interpretation changes when available traffic information is introduced. The study therefore links a long Icelandic accident series with local weather frequency and two complementary traffic-exposure approaches, while treating station observations as proxies for road conditions rather than direct measurements of the forces acting on a vehicle.

The study covers rural injury accidents in Iceland from 2007–2025. Accident times and locations are linked to nearby 10-minute weather observations. Mean wind is the primary weather measure; wind gust and temperature are secondary measures, while season, time of day and daylight provide additional context.

Accident counts alone do not measure accident risk. Severe weather may increase the hazard faced by each vehicle while also reducing the number of vehicles on the road. Weather frequency and traffic volume are therefore considered separately (Andrey et al., 2003; Lord and Mannering, 2010; Washington et al., 2020).

1.2 Aim and Research Questions

The primary research question is: *How does rural injury-accident occurrence vary with weather, particularly strong wind, after accounting as far as possible for local weather*

frequency and traffic exposure?

The analysis proceeds in three stages:

1. **Weather-frequency baseline (Q1).** Compare observed accidents with the number expected from local weather frequency, by parameter and season. This measures over-representation relative to weather time, not risk per vehicle.
2. **Approximate traffic correction (Q2).** Establish how traffic changes with weather, then use the observed counter response to reweight the baseline comparison. This asks whether lower traffic explains the wind pattern.
3. **Counter-based accident rates (Q3).** Relate accident counts to estimated vehicle-kilometres using daily traffic, rural road length and monthly weather frequencies. Compare with allocation using the actual day's weather.

Q1–Q3 identify analysis stages addressing this question, not repeated estimates of one parameter. The baseline and approximate correction cover 2007–2025; the rate analysis uses a smaller counter-linked sample from 2019–2024. Matched-time and older traffic models provide secondary robustness checks. Minor injury and serious or fatal injury form disjoint components of all injury. The study estimates associations, not causal effects or a complete national accident rate per vehicle-kilometre.

1.3 Thesis Outline

Chapter 2 gives the background for the weather and traffic comparisons. Chapter 3 describes the data, data preparation, and statistical methods. Chapter 4 presents the three main analyses in research-question order, followed by supporting checks. Chapter 5 discusses their interpretation and limitations, and Chapter 6 gives the conclusions. The appendix contains additional checks that support interpretation of the main results.

2 Background

2.1 Wind and Rural Road Accidents

Crosswind can produce overturning, lateral sideslip, or excessive yaw. The critical condition depends on vehicle geometry and mass, vehicle speed, road friction, wind direction, and driver response rather than wind speed alone (Baker, 1986, 1994). High-sided vehicles are particularly exposed, but the physical mechanisms also provide a reason to examine loss-of-control accidents more generally. These engineering studies establish physical plausibility and vehicle-specific failure mechanisms; they do not by themselves establish a population-level association between wind and accident occurrence.

This problem is directly relevant in Iceland, where terrain can accelerate and redirect near-surface wind over short distances. An Icelandic reliability study by Snæbjörnsson et al. (2007) modelled accident probability as a combined function of wind velocity and direction, road camber and friction, and vehicle speed. A station measures wind at one point, whereas vehicle stability also depends on the wind's direction relative to the road and on local road conditions. Terrain between a station and a road can alter the wind reaching the vehicle. Station observations therefore remain exposure proxies, and a shorter matching distance does not guarantee identical conditions. Mobile road measurement research similarly shows that roadside terrain creates marked spatial variation that a sparse fixed-station network cannot fully resolve (Pu et al., 2018).

Vegagerðin has developed a vehicle-wind model to support decisions about hazardous conditions and road closures, while also noting the limited experimental evidence available for passenger cars (Hrafnkelsdóttir, 2020). The present thesis does not test that operational model; it examines population-level accident occurrence using a separate data design.

Empirical work has compared the share of accidents occurring in high wind with the share of time that high wind was observed, an approach closely related to the observed/expected comparison used here (Edwards, 1994). Studies linking crashes to nearby weather stations likewise show that station observations can be informative while retaining measurement error (Young and Liesman, 2007). More broadly, Theofilatos and Yannis (2014) report less consistent road-safety evidence for wind than for precipitation.

2.2 Temperature, Daylight, and Time of Day

Temperature, daylight, and time of day add context that wind alone cannot provide. They affect road-surface conditions, visibility, travel patterns, and the composition of road users, but accident counts in these categories are not rates unless the corresponding amount of travel is known. Temperature effects can also be non-linear and season-specific: a Seoul time-series

study found its strongest cold-weather association below freezing in winter, while an hourly case-crossover study in Shenzhen found a J-shaped temperature relationship (Lee et al., 2014; Zhan et al., 2020). Temperature is therefore compared with its local seasonal frequency rather than treated as having one linear effect.

Darkness presents the same denominator problem. A method developed using Norwegian, Swedish, and Dutch data compared daylight and darkness within clock time and season, avoiding the interpretation of raw night-time counts as risk (Johansson et al., 2009). Here, raw hour, season, and daylight counts describe the sample. Matched daylight and adjusted severity models are used for numerical comparisons.

2.3 Traffic and Accident Rates

Weather can change the amount of traffic as well as the hazard. Research using automatic traffic recorders shows that extreme weather variables, including wind, can reduce or redistribute hourly traffic volume (Sathiaraj et al., 2018). Accident counts during strong wind can remain low even if risk to each travelling vehicle is higher. High-resolution crash studies illustrate the value of hourly weather data rather than daily or monthly averages (Xing et al., 2019). The analyses distinguish three quantities: accident occurrence relative to weather frequency, rates based on estimated vehicle-kilometres, and changes in observed daily traffic. Studies with real-time traffic, weather, and road geometry show what a more complete analysis could achieve when such data are available (Ahmed et al., 2012).

3 Data and Methods

3.1 Data

3.1.1 Source Data

Table 3.1 summarises the source datasets. Official documentation for each source is listed in the bibliography (Samgöngustofa, 2026; Veðurstofa Íslands, 2026; Vegagerðin, 2026; Hagstofa Íslands, 2026).

Table 3.1: Source datasets. The study period is 2007–2025.

Data	Provider	Contents	Coverage
Accident	Samgöngustofa	Accident events and road links	126,607 events and 126,610 road links, 2007–2025
Weather	Icelandic Meteorological Office (IMO)	10-minute weather observations and station metadata	232,459,562 observations from 338 stations; 438 station records, 2007–2025
Traffic and roads	Vegagerðin	Annual road traffic, daily counter reports, counter locations, and road geometry	33,757 section-years, 2000–2025; 1,033,659 counter channel-days, 2019–2024
Urban areas	Statistics Iceland	Urban-area polygons	97 polygons in the 2020–2024 release

Records from the year 2025 are included in the accident, injury, vehicle, road-link, annual-traffic and weather datasets under the same selection and quality criteria as records from earlier years. Daily counter data are available through 2024. Table 3.2 defines the weather and traffic quantities used in the subsequent comparisons.

Table 3.2: Definitions used throughout the thesis.

Term	Definition	Use in this thesis
f	10-minute mean wind speed, m/s	Main weather measure, matched within five minutes of the accident time.
fg	Wind gust reported in the same 10-minute observation, m/s	Additional weather measure; not a daily maximum.
t	Air temperature reported with each 10-minute observation, °C	Additional weather measure matched independently.
O/E	Observed accidents divided by accidents expected from local weather frequency	Main relative-occurrence result; traffic is not included.
ADU	Average vehicles per day over the year	Used to check and derive annual traffic quantities.
SDU	Average vehicles per day in June–September	Official summer traffic value.
VDU	Average vehicles per day in December–March	Official winter traffic value.
VH DU	Average vehicles per day in April–May and October–November	Spring/autumn daily traffic calculated as the residual from ADU, SDU and VDU.

3.1.2 Accident Data

The accident dataset contains 126,607 records from 2007–2025 (Samgöngustofa, 2026). One record lacks valid temporal or spatial information, leaving 126,606 valid records.

Rural status is derived from accident coordinates and Statistics Iceland urban-locality polygons (Hagstofa Íslands, 2026). Points inside an urban polygon are classified as Urban, and valid points outside all polygons as Rural. A defined Vestmannaeyjar area is also classified as Urban. The same 2020–2024 polygon dataset is applied to the full 2007–2025 accident period. Changes in urban boundaries before 2020 are not represented.

Applying this rural classification yields 24,005 accidents, of which 6,414 involve injury. Of these, 6,259 have a qualifying primary weather match within 20 km and five minutes.

Accident severity is recorded in `meidsli`: code 1 denotes a fatal accident, code 2 a serious accident, code 3 a minor-injury accident, and code 4 an accident without injury. The main outcome is $\text{meidsli} \leq 3$. The serious or fatal comparison uses $\text{meidsli} \leq 2$. The source data also contain 17,591 rural damage-only accidents; these are outside the injury outcome.

For the reader-facing results, injury accidents are divided into two disjoint groups: minor injury ($\text{meidsli}=3$) and serious or fatal injury ($\text{meidsli}=1$ or 2). The O/E calculation for these groups is described in Section 3.3.1.

Table 3.3 illustrates the cleaned accident record before weather matching. Date, time, road location, rural classification, injury category and vehicle count describe the event; weather measurements are added in a later linkage step. The example is a single-vehicle minor-injury accident and is not intended to represent the frequency of accident types.

Table 3.3: Example of a cleaned rural injury-accident record. The table illustrates accident-level information retained before weather matching. The source identifier is omitted, time is rounded to the hour, and coordinates to 0.1 degree; no weather fields are included.

Field	Example value
Example identifier	A (source identifier omitted)
Date	2007-01-03
Time (rounded to the hour)	18:00
Registered road section	1-g8
Approximate location	64.6 degrees N, 21.9 degrees W
Area classification	Rural
Injury category	Minor injury
Involved vehicles	1

Figure 3.1 shows the geographic distribution of the rural injury sample and highlights accidents matched to strong mean wind.

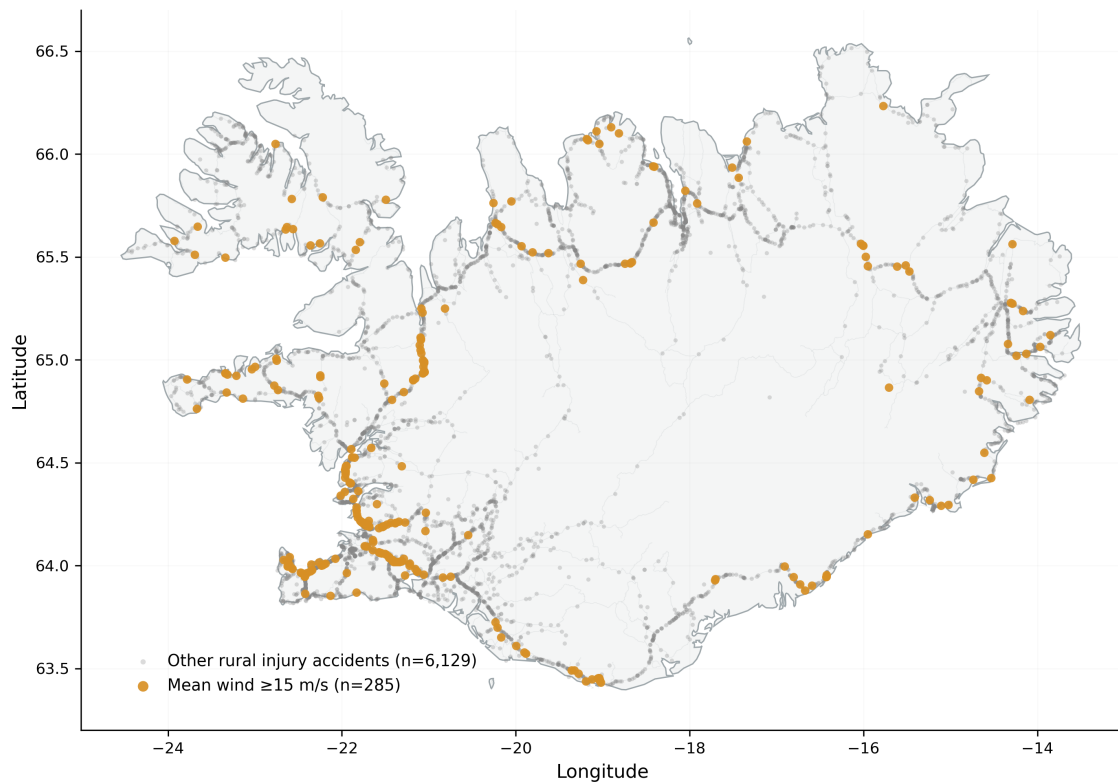


Figure 3.1: Locations of the 6,414 rural injury accidents. Accidents matched to mean wind of at least 15 m/s are highlighted. The map shows the spatial coverage of the study and is not a regional accident-rate map.

3.1.3 Weather Data

The weather dataset contains 10-minute observations from Icelandic weather stations. The variables used here are 10-minute mean wind speed (f), reported wind gust (fg), and temperature (t). For each accident, the gust is taken from the same matched 10-minute observation

as mean wind; it is not the maximum across the accident day. Mean wind speed remains the main weather measure. A wind observation is used when

$$0 \leq f < 45, \quad 0 \leq fg < 65, \quad fg + 0.5 \geq f.$$

Rows missing either f or fg are excluded. Negative values, values at or above either upper limit, and internally inconsistent values where $fg = 0$ but $f > 0$ are excluded. These quality exclusions are summarised in Table 3.5. A value of $f = 0$ alone is kept. Only uninterrupted all-zero runs where $f = fg = 0$ for at least two hours are excluded as potentially frozen sensors. Missing temperature does not affect whether a wind observation is used.

Each accident is matched to the geographically nearest station with a quality-controlled wind observation at one of the two adjacent timestamps on the 10-minute observation grid. The selected observation is therefore no more than five minutes from the recorded accident time. Because matching is based on absolute time difference, the adjacent observation can fall on the neighbouring calendar day for accidents occurring within five minutes of midnight. The maximum matching distance is 20 km. The matching dataset includes all 6,414 accidents and records whether each accident meets the weather-match criterion.

Temperature is matched independently within the same 20 km and five-minute limits. The nearest valid value between -30 and 30°C may therefore come from a different station when the wind station lacks temperature. In the final analysis dataset, however, all 6,259 wind and temperature matches use the same station and observation time.

The IMO supplied observations of time, station, temperature, mean wind, and gust. The same quality-controlled weather data are used for accident matching, background frequencies, matched control times, and traffic analyses. No temperature value is imputed.

Table 3.4 reports spatial and temporal match quality for wind and temperature. Table 3.5 then summarises the wind-quality exclusions and retained observations.

Table 3.4: Share of accidents with weather information from a station with a valid measurement within 20 km. Distance is shown as median / 90th percentile; every retained observation is within five minutes of the accident time.

Variable	Accidents	Share	Stations	Distance (km)
Mean wind and gust	6,259	97.6%	279	5.1 / 12.3
Temperature	6,259	97.6%	279	5.1 / 12.3

Table 3.5: Wind-data scope and quality audit, 2007–2025. Quality-rule shares use all supplied observations. Every supplied station-year contains at least one wind measurement.

Category	Records	Share
All supplied station-time observations	232,459,562	100.00%
Missing f or fg	261,519	0.11%
Negative or upper-threshold wind	8,766	0.00%
Internally inconsistent f/fg	257,245	0.11%
Frozen all-zero runs (≥ 2 hours)	1,473,082	0.63%
Quality-controlled wind observations retained	230,458,950	99.14%

The wind-quality rules exclude 2,000,612 observations and retain 230,458,950 (99.14%). The largest excluded category is uninterrupted all-zero runs, which is reported separately because it reflects the rule for possible instrument stoppages rather than a missing observation. The audit reports each rule separately and uses all supplied weather observations from 2007–2025. For each accident’s station and season, the O/E expected count uses all quality-controlled background observations in that station–season group, not only observations recorded on accident days.

3.1.4 Traffic Data

Daily counter data underpin Q2 and Q3, while annual road-section traffic is used in supporting analyses.

Annual road-section data provide average annual daily traffic (ADU), summer daily traffic (SDU), winter daily traffic (VDU), section length, and annual vehicle-kilometres for 2000–2025 (Vegagerðin, 2026). The road-section comparison uses the years shared with the accident study, 2007–2025. Following the official definitions, SDU covers June–September and VDU covers December–March. These data can be linked to accidents with a registered road-section identifier, but this linkage is considerably more restrictive than the weather matching. Table 3.6 distinguishes the published averages from the derived spring/autumn value.

Table 3.6: Official traffic averages and the spring/autumn daily traffic value used in the annual-traffic analysis.

Period	Months	Daily traffic reference
ADU (<i>ársdagsumferð</i>)	Full calendar year	Official annual daily traffic
VDU (<i>vetrardagsumferð</i>)	December–March	Official winter daily traffic
SDU (<i>sumardagsumferð</i>)	June–September	Official summer daily traffic
VHDU (<i>vor- og haustdagsumferð</i>)	April–May and October–November	Residual daily average calculated from ADU, SDU, VDU, and the number of days in each period

Throughout the analyses, the four study seasons are aligned with these traffic periods: winter is December–March, spring is April–May, summer is June–September, and autumn is October–November. These are study-specific traffic-aligned seasons rather than conventional three-month meteorological seasons. Using June–September as summer keeps the weather comparison aligned with the Icelandic road authority’s summer traffic period; it is an operational definition, not a claim that weather is uniform across those months. The IMO also uses June–September when summarising the Icelandic summer (Veðurstofa Íslands, 2025). VHDU is not calculated as $ADU - SDU - VDU$. Annual traffic implied by ADU is first converted to a calendar-year total; the day-weighted SDU and VDU totals are subtracted, and the remainder is divided by the number of spring and autumn days:

$$VHDU = \frac{D_{year}ADU - D_{VDU}VDU - D_{SDU}SDU}{D_{VHDU}}.$$

Here, each D is the number of calendar days in that period. VHDU is therefore a residual estimate rather than an additional official traffic measure.

Daily traffic counts extracted from Vegagerðin reports cover 2019–2024 and provide observed totals at selected counter sites. They underpin the traffic response used in Q2 and the counter-linked exposure calculation in Q3, but do not provide hourly traffic at accident locations. More than one counter may occur on a road section, and counter positions are estimated from the registered road geometry. These data remain separate from the primary O/E calculation.

Of 68,946 annual road-section–year–period records, 61,442 have nearby usable wind data; separately, 763,171 of 774,274 daily counter-days have a matched daytime wind summary. The smaller linked accident samples used by the traffic models are reported in Chapter 4.

3.1.5 Selection Summary

Table 3.7 summarises the main data reductions. Selection for the study area and injury outcome is distinguished from invalid or missing measurements: an excluded record is not necessarily an erroneous record. The traffic-based rate analysis starts with the 1,863 rural injury accidents in 2019–2024; the broader weather and annual-traffic samples cover 2007–2025. Traffic-period rows and counter-days are exposure records rather than accident counts, so the rows in the table are separate selections rather than one successive filtering chain.

Table 3.7: Overview of the main data selections. Rows are separate selections rather than successive steps; the last three count accidents.

Dataset / selection	Before	Removed	Retained	Reason
Accidents	126,607	120,193	6,414	Invalid time/location, urban, or no injury.
Weather observations	232,459,562	2,000,612	230,458,950	Missing, implausible, inconsistent or frozen wind.
Annual traffic periods	68,946	9,072	59,874	No usable weather or nonpositive traffic/length.
Daily counter-days	774,274	11,103	763,171	No usable daytime wind summary.
Primary weather sample	6,414	155	6,259	No weather match within 20 km and five minutes.
Annual traffic sample	6,414	1,289	5,125	Road linkage, exposure or weather eligibility.
Traffic-based rate sample	1,863	1,169	694	Counter linkage, daytime accident, traffic record, or weather availability.

3.1.6 Descriptive Accident Patterns

Figure 3.2 shows when the selected accidents occurred and the conditions recorded with them. The blue and red groups are the same separate severity groups used in the O/E figures. These are raw counts: more accidents in an hour or season may reflect more traffic, and the panels do not estimate accident risk. Vehicle counts and accident-type composition are shown in Appendix A.1.

3.2 Data Preparation and Reproducibility

Table 3.8 summarises the path from source data to the three main analyses. Accident, weather and traffic records first undergo quality checks and selection. Qualifying accidents are matched to nearby weather observations, and local weather frequencies form the denominator for Q1. Q2 applies an approximate traffic correction estimated from the 2019–2024 counters to that same weather-frequency framework. Q3 uses the counter-linked 2019–2024 sample

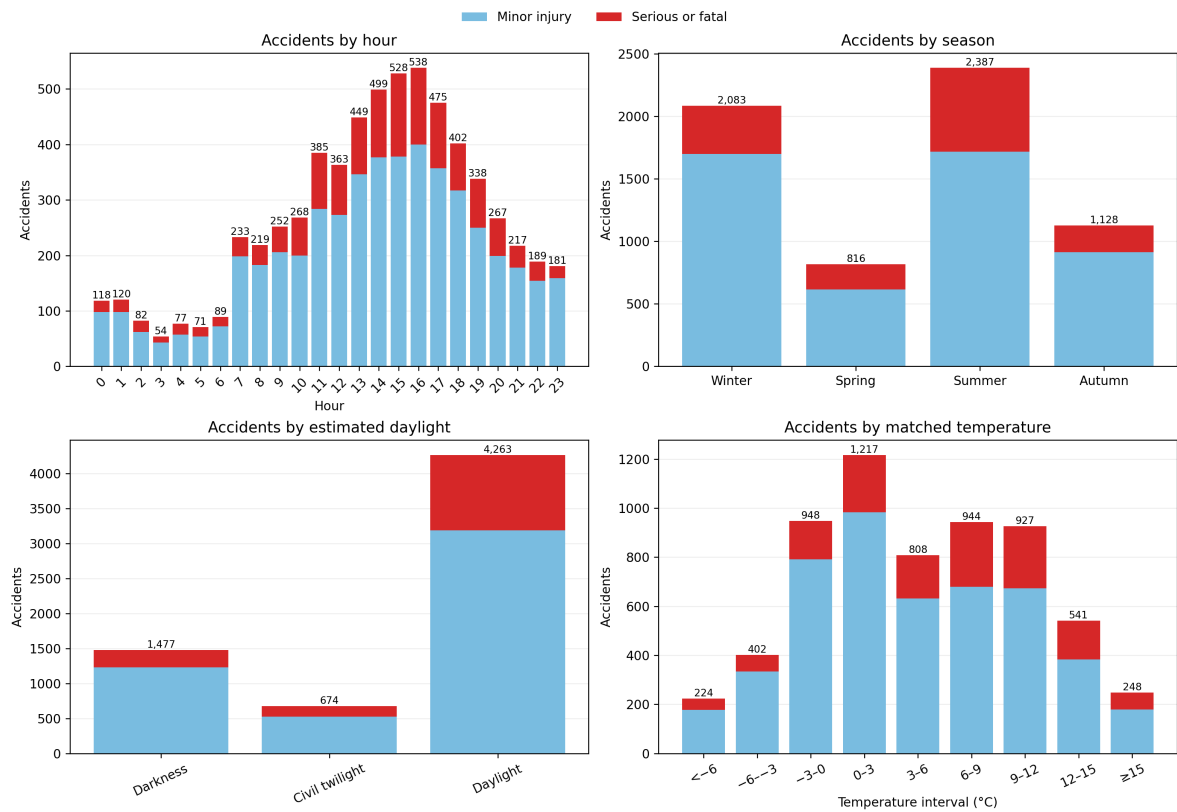


Figure 3.2: Rural injury accidents by hour, study season, estimated daylight and matched temperature. Blue shows minor injury (code 3), and red shows serious or fatal injury (codes 1–2). Labels give total accidents. Hour, season and daylight use 6,414 accidents; temperature uses 6,259 qualifying matches. These are descriptive counts, without traffic adjustment.

to estimate vehicle-kilometre exposure from observed daily traffic, road length and pooled monthly weather frequencies. Matched-time and additional traffic models are retained as supporting checks. This separation is important because the analyses use different exposure assumptions and eligible samples.

All cleaning, matching, analysis, and thesis-table generation are scripted. Generated tables are written from analysis outputs, and validation checks cover key sample counts, matching rules, and exposure conservation. This reduces manual transcription between the analysis and the thesis while keeping the main transformations auditable.

Table 3.8: Data preparation and analysis workflow.

Stage	Main data	Output	Role in thesis
Data preparation	Accident, weather, road and traffic data	Quality-controlled datasets	Defines the study data.
Accident selection	Accident data and urban boundaries	Rural injury accidents	Defines the study population.
Weather matching	Accidents, weather observations and stations	Accident-time weather and local frequencies	Common input to the weather analyses.
Q1: weather-frequency O/E	Accident weather and local frequencies	Observed and expected counts	Primary analysis.
Q2: approximate traffic correction	Primary O/E and 2019–2024 counter response	Traffic-corrected expected counts	Approximate traffic-exposure sensitivity.
Q3: monthly-frequency VKT rate	Recorded counter-days, rural lengths and monthly weather frequencies	Accidents per estimated million VKT	Main counter-linked traffic analysis.
Supporting analyses	Matched control times and alternative traffic panels	Matched odds ratios and alternative rate estimates	Robustness checks.

3.3 Analysis

3.3.1 Q1: Weather-Frequency Comparison

Accident-time mean wind speed f is the main weather measure and is divided into 5 m/s intervals. It is the 10-minute mean wind observation matched within five minutes of the accident time, not an instantaneous measurement. Wind gust f_g from the same observation and independently matched temperature are additional weather measures. For each measure, accidents are compared with the distribution of that weather measure at the matched station in the same study season, pooled across all study years. Expected counts are therefore based on how often each condition occurred locally rather than on a national weather distribution. For example, if 5% of the relevant station–season observations fall in one wind interval, approximately 5% of that group’s accidents would be expected there under weather-frequency-proportional occurrence.

Let g identify a weather station and study season. Let A_{jg} be the number of accidents in weather interval j and group g , and let $A_g = \sum_j A_{jg}$. From all quality-controlled 10-minute observations, let T_{jg} be the number in interval j and T_g the total in group g . The local

background frequency is

$$p_{jg} = \frac{T_{jg}}{T_g}.$$

If accident timing followed local wind frequency, the expected number in the interval would be $A_g p_{jg}$. The pooled observed/expected ratio is

$$R_j = \frac{\sum_g A_{jg}}{\sum_g A_g p_{jg}}.$$

At mean wind of at least 20 m/s, 56 minor-injury accidents were observed compared with 25.18 expected, giving O/E 2.22. This illustrates the calculation without attributing any individual accident to wind.

A value of one means that the accident share equals the local time share of the weather interval. A value above one means that accidents are over-represented in that interval. Standardisation within station and season prevents locations or seasons with different weather distributions from dominating the result.

The figures show the calculation separately for minor-injury accidents (*meiðsli*= 3) and serious or fatal accidents (*meiðsli*≤ 2). These groups do not overlap. Each group's expected count uses its own accident totals within station and season. The combined all-injury O/E is also retained for comparison with the other analyses; it is calculated from summed observed and expected counts, not by averaging the two group ratios. Q1 is reported as a descriptive standardised ratio rather than a fitted inferential model, so observed and expected counts are shown without model-based confidence intervals. Wind gust and temperature are handled in the same way as mean wind. Temperature is matched independently, and its intervals are below −6, −6 to −3, −3 to 0, 0 to 3, 3 to 6, 6 to 9, 9 to 12, and at least 12°C. The O/E upper interval is combined at 12°C to keep the seasonal panels readable. The matched-time and annual-traffic models retain separate 12–15 and at-least-15°C intervals. Estimates across those different upper intervals are not treated as direct numerical comparisons.

3.3.2 Use of Traffic Data

The primary O/E denominator is the local frequency of wind conditions rather than traffic volume. Complete traffic data are unavailable at the required spatial and temporal resolution, so Q1 does not account for changes in travel volume during strong wind. If traffic is lower in strong wind while other factors remain unchanged, the accident-rate contrast per vehicle-kilometre would be larger than the weather-frequency O/E contrast.

Traffic enters the main analysis in two ways. Q2 estimates the relative daily traffic response across weather intervals from the 2019–2024 counters and uses that response to reweight the Q1 denominator. Q3 constructs estimated vehicle-kilometre exposure from observed daily traffic and rural road length in a smaller counter-linked sample. Neither analysis observes hourly traffic. Additional annual road-section and allocated daily-counter models are retained as supporting checks under alternative exposure constructions.

3.3.3 Q2: Approximate Traffic Correction to O/E

The approximate correction uses the observed day-to-day traffic response at counter sections during 2019–2024. Among positive-count days, the mean count for the same counter section, year, month, and weekday defines expected daily traffic. Each day's observed 24-hour count and expected count are allocated to weather intervals in proportion to their valid 07:00–24:00 weather minutes on that date. For interval j , r_j is the sum of allocated observed traffic divided by the sum of allocated expected traffic. Zero-count days are excluded from this response calculation.

Using the same station–season group g and weather interval j as in Q1, the traffic-weighted weather frequency is

$$p_{jg}^* = \frac{p_{jg} r_j}{\sum_h p_{hg} r_h}.$$

Expected counts are then recalculated as $A_g p_{jg}^*$. Accident bins use weather at the recorded accident time, whereas r_j is based on a 24-hour traffic total repeated across the day's daytime weather composition. Daily counters do not observe hourly traffic. The 2019–2024 response is also extrapolated to the 2007–2025 primary population. The result is therefore a model-based sensitivity analysis, not a directly observed traffic-adjusted O/E.

The period sensitivity repeats the original comparison separately for 2007–2018 and 2019–2024, restricting both accidents and background weather to the stated years. The latter period is also recalculated with the counter traffic response. These All year comparisons show what changes when the accident and weather period aligns with the traffic data. Minor and serious or fatal injuries remain disjoint and use their own expected counts. The existing counter-era correction includes temperature as well as wind and gust; it does not extend the full-period correction to temperature.

3.3.4 Q3: Traffic-Based Accident Rates

The main traffic rate is restricted to 2019–2024, when daily counter data are available. Eligible accidents must be rural injury accidents occurring between 07:00 and 24:00, have a counter section for the registered road and year, be successfully located on that section, have usable accident-time wind and gust within 20 km and five minutes, and have a traffic record on the accident date. For this analysis, the 20 km weather distance is measured from the counter-section location rather than from the accident coordinate. The same five-minute time rule applies as in Q1 and can select the adjacent observation across midnight. The denominator is broader than the accident set: it uses every eligible recorded counter-section day with a nonnegative traffic count and rural road length, including days without an accident. For counter section j , date d , and weather interval b , estimated exposure, in vehicle-kilometres travelled (VKT), is

$$\hat{V}_{jdb} = C_{jd} L_j p_{j,m(d),b},$$

where C_{jd} is the observed 24-hour traffic count, L_j is rural section length under that year's definition, and $p_{j,m(d),b}$ is the 07:00–24:00 weather frequency for that calendar month at the

station assigned to counter section j . The weather frequencies are pooled across 2007–2025 to provide stable station–month proportions, while both traffic and accident eligibility remain restricted to 2019–2024. The full daily count is allocated to the 07:00–24:00 window and the proportions sum to one, so exposure is conserved. Accidents are classified separately by observed event-time weather within 20 km and five minutes. The reported rate is

$$R_b = \frac{O_b}{\sum_j \sum_d \hat{V}_{jdb}} 10^6.$$

This construction uses actual day-to-day traffic variation and rural road length, but allocates it with a typical monthly weather distribution rather than observed hourly traffic. Daily traffic still varies from day to day, but one storm day’s weather does not determine that day’s entire allocation among weather bins. The typical distribution for the station and calendar month provides a more stable allocation. This is an exposure assumption, not evidence that the monthly method measures actual traffic within each weather interval.

For the injury-component figures, the exposure denominator $\hat{V}_b = \sum_j \sum_d \hat{V}_{jdb}$ is shared:

$$R_b^{\text{minor}} = \frac{O_b^{\text{minor}}}{\hat{V}_b} 10^6, \quad R_b^{\text{serious/fatal}} = \frac{O_b^{\text{serious/fatal}}}{\hat{V}_b} 10^6.$$

Minor injury means code 3; serious or fatal injury means codes 1–2. Their counts are disjoint, so their rates sum to the all-injury rate. Blue forms the bottom of each stack and red the top. This is a descriptive decomposition of the accident numerator, not a severity model. For seasonal panels, counts and exposure are summed within each study season before division; the seasons partition the All year result. In the seasonal rate figures, mean-wind intervals at or above 15 m/s and gust intervals at or above 20 m/s are combined by summing counts and exposure before division. All year retains the fine bins.

Same-day allocation sensitivity. The alternative allocation uses weather observed on each actual counter-day:

$$\hat{V}_b^{\text{day}} = \sum_j \sum_d C_{jd} L_j \frac{M_{jdb}}{1020}, \quad R_b^{\text{day}} = \frac{O_b}{\hat{V}_b^{\text{day}}} 10^6,$$

where M_{jdb} is the number of observed minutes in bin b during 07:00–24:00. Traffic is assumed uniform over this window. Weather is taken from the nearest qualifying station available at each timestamp; missing weather time contributes no allocated exposure. Eligible positive-traffic days without accidents still contribute. Unlike monthly allocation, this method retains only weather-covered exposure rather than the full daily total. It therefore depends more strongly on the weather composition of individual days, completeness of observations and the assumption about traffic within the day. Sparse extreme-weather days can have greater influence. It is retained as a sensitivity, not a replacement for the main monthly-frequency denominator. The accident numerator still uses actual event-time weather in the linked sample. The existing output supports mean wind, gust and temperature, with disjoint injury groups sharing exposure in each bin and season. Seasonal wind and gust tails are combined for display as specified in Results, while All year keeps the finer bins. This is Q3’s exposure-allocation sensitivity, distinct from the older allocated daily-counter regression below.

Table 3.9 summarises the two exposure constructions. Monthly allocation is the main method because only daily traffic totals are observed: typical station-month weather provides a stable allocation while retaining actual day-to-day traffic variation. It depends less on isolated storm days and missing observations within a particular day. Same-day allocation has the useful advantage of using realised weather, but distributing the full daily traffic total using that day's observed weather requires an additional assumption about traffic within the day. Neither method observes hourly exposure.

Table 3.9: Comparison of the main monthly-frequency allocation and same-day sensitivity.

	Monthly-frequency main method	Same-day sensitivity
Traffic and road input	Observed daily count $\times$ rural road length	Same
Weather allocation	Typical pooled station-month distribution	Weather observed on the actual date
Accident classification	Actual accident-time weather	Actual accident-time weather
Accident-free days	Included when eligible	Included where weather defines exposure
Hourly traffic observed?	No	No
Main advantage	Stable weather-bin allocation	Responds to realised daily weather
Key limitation	Monthly weather approximates exposure	Daily total allocated by observed weather; missing time excluded
Role	Main traffic-rate analysis	Sensitivity to allocation choice

3.3.5 Supporting Matched-Time Comparison

The supporting matched-time analysis uses a time-stratified case-crossover design in which each accident forms one matched set. The accident time is the case time, and the control times are the other occurrences of the same weekday and clock time in the same calendar month and year. For example, a Tuesday accident at 14:20 is compared with the other Tuesdays at 14:20 in that month. Mean-wind and gust controls use the accident's matched wind station; temperature controls use its independently matched temperature station. Control weather must satisfy the same five-minute observation-time rule, and both station matches are restricted to 20 km. Conditional logistic regression compares weather at the accident time with weather at its matched control times. This time-stratified referent strategy was selected to avoid overlap bias and to control calendar time without selecting controls from outside the accident month (Janes et al., 2005).

The model asks whether weather at an accident time differs from weather at comparable non-accident times. The matching holds station, year, month, weekday, and clock time fixed, but not unusual traffic, road conditions, or other factors that change on a particular day. Continuous effects are reported per 5 m/s or 5°C together with categorical estimates.

Mean wind and temperature are also entered together as categorical variables to assess whether the wind estimate changes after including temperature at the same case and control times. Daylight is calculated at the accident location for the accident date and the same matched dates. Because month, weekday, and clock time are held fixed, only strata that change between darkness, civil twilight, and daylight contribute information.

Seasonal differences in the mean-wind association are tested in a separate matched-time model. Mean wind is grouped as 0–10, 10–15, and at least 15 m/s for stability. The model includes interactions between wind interval and season, and a likelihood-ratio test compares it with a model having one common wind association across seasons. The omnibus test is used instead of judging seasonal differences from separate confidence intervals.

A separate logistic model describes serious or fatal rather than minor injury among accidents with complete wind and temperature matches. It includes broad categories of mean wind, temperature, daylight, time of day, and season. The result concerns injury severity among recorded accidents. It is not a model of whether an accident occurs and does not replace the traffic analyses.

3.3.6 Supporting Road-Section Traffic Comparison

Annual road-section data provide a supporting exposure analysis for accidents that can be linked by road section, year, official traffic period, and wind interval. For road-section–year–traffic-period stratum k and wind interval j , estimated vehicle-kilometres are

$$V_{kj} = q_k L_k D_k p_{kj},$$

where q_k is SDU, VDU, or derived VHDU vehicles per day, L_k is section length, D_k is the number of calendar days, and p_{kj} is the local share of quality-controlled 10-minute observations in wind interval j . This construction accounts for road length and differences in published seasonal traffic, but assumes that traffic within each traffic period is distributed across wind intervals in proportion to time. It does not observe traffic at the accident minute.

The station nearest the road-section midpoint with qualifying data supplies p_{kj} . Accidents in this analysis are matched to that road-section station, rather than to the accident-nearest station used in Q1, and are retained only when the station is within 20 km and has a valid observation within five minutes of the accident time.

A conditional Poisson model is fitted as a supporting inferential analysis. Each road section, year, and traffic period has its own intercept:

$$\log E(A_{kj}) = \alpha_k + \beta_j + \log V_{kj},$$

where A_{kj} is the accident count and $\log V_{kj}$ is the offset. The exponentiated coefficient $\exp(\beta_j)$ is the estimated rate ratio relative to 0–5 m/s within road-section–year–traffic-period strata. Strata with no accidents contain no within-stratum information after conditioning and do not contribute to this model. The model is fitted separately for all injury accidents and for serious or fatal accidents. A seasonal extension uses 0–10, 10–15, and at least 15 m/s because the finer upper-wind cells are sparse.

3.3.7 Supporting Allocated Daily-Counter Model

An additional daily-counter model uses observed 24-hour totals but estimates how those totals are distributed across wind intervals within each day. Directional channels are first summed

to one count for each physical counter and date. Each 2019–2024 accident then requires a counter on the exact registered road section and year, positive traffic on the accident date, and a qualifying accident-time mean-wind observation. For counter c , date d , and wind interval j , the daily count is allocated as

$$\hat{Q}_{cdj} = Q_{cd} \frac{N_{cdj}}{N_{cd}},$$

where N_{cdj} is the number of valid 10-minute observations in interval j and N_{cd} is the total number of valid observations that day. Accidents are classified by accident-time mean wind from the same station used for the counter-day denominator. Estimated traffic and accidents are aggregated by counter, year, and wind interval, and a conditional Poisson model gives each counter–year its own intercept. The allocation assumes uniform traffic across valid observation times and is therefore an estimated within-day split rather than observed hourly exposure. Selection and sensitivity checks for this 762-accident supporting model are reported in the appendix.

4 Results

Results are presented in the order of the three research questions. First, the primary weather-frequency analysis compares observed accidents with counts expected from local weather frequency. Second, an approximate traffic correction asks how that comparison changes when the traffic response measured at daily counters is applied to the primary denominator. Third, the monthly-frequency counter analysis estimates accident rates per vehicle-kilometre in the smaller 2019–2024 traffic-linked sample. Matched-time and additional traffic models are reported afterwards as supporting checks. Because these analyses use different samples and denominators, their numerical estimates are not interpreted as repeated estimates of the same quantity.

4.1 Study Sample and Coverage

Table 4.1 summarises the populations used by the main and supporting analyses. The primary O/E retains 6,259 of the 6,414 rural injury accidents, whereas analyses requiring traffic linkage use smaller and more selective samples. Figure 4.1 shows that weather-match coverage remains high throughout 2007–2025.

Table 4.1: Accident selection and analysis sample sizes.

Stage	Accidents	Purpose
Source records	126,607	Accident database, 2007–2025.
Rural injury accidents	6,414	Study population.
Q1: Primary O/E	6,259	Main weather-frequency analysis.
Q2: Approximate traffic correction	6,259	Same accident sample as Q1; denominator reweighted using counter-derived traffic response.
Q3: Traffic-based rates	694	Main counter-linked traffic analysis, 2019–2024.
Supporting matched-time	6,257	Time-matched robustness analysis.
Supporting annual traffic	5,125	Broader road-linked traffic model.
Supporting allocated daily-counter	762	Alternative daily-counter model.

The 20 km threshold provides broad coverage while limiting the distance between an accident and its weather proxy. It does not imply that station conditions are identical to conditions at the road, particularly in complex terrain. Wind and temperature are matched independently, but both procedures retain the same accidents and select the same station and observation time in the final analysis dataset.

Question 3 uses a different starting population because daily counters are available only for 2019–2024. Table 4.2 shows the full selection from all injury accidents in 2007–2025, first restricting to 2019–2024 and then applying the Q3 linkage criteria, to the final 694 counter-linked daytime accidents. The first row includes urban and rural injury accidents; the

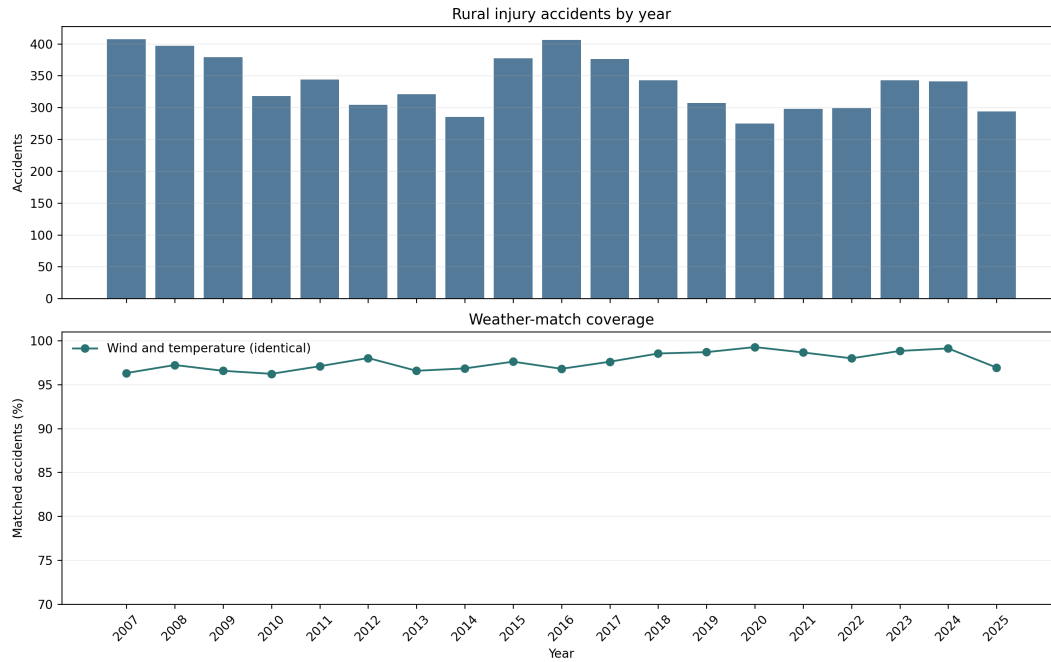


Figure 4.1: Annual rural injury-accident counts and weather-match coverage, 2007–2025. The lower panel gives the percentage of accidents with a qualifying wind or temperature observation within 20 km and five minutes. Wind and temperature coverage is identical in every year, and no missing temperature value is imputed.

rural restriction is applied in step (a). All 83 exclusions at the final step lack a counter-day record on the accident date; no accident is removed because its recorded daily count is zero.

Table 4.2: Selection for the Q3 monthly-frequency daily-counter rate. The first row includes urban and rural injury accidents; the rural restriction is applied in step (a). The final set contains minor, serious and fatal injury accidents and is distinct from the supporting allocated daily-counter sample.

Step	Removed	Remaining
All injury accidents, 2007–2025	–	17,045
0) Restrict to 2019–2024	11,849	5,196
a) Exclude urban accidents	3,333	1,863
b) Require counter-section for road/year	994	869
c) Require successful road-location assignment	21	848
d) Exclude 00:00–07:00	67	781
e) Require usable wind and gust (≤ 20 km, ± 5 min)	4	777
Require daily traffic count	83	694

Notes: The 21 road-location failures in step (c) comprise five records without usable road geometry, 15 located more than 100 m from their registered road, and one projected outside the counter sections. For step (e), the 20 km weather distance is measured from the counter-section location rather than the accident coordinate; valid mean wind and gust are required within five minutes of the recorded accident time.

4.2 Weather-Frequency Baseline

Figures 4.2–4.4 show the primary weather-frequency comparisons for the full year and the four study seasons. Blue bars show minor-injury accidents and red bars show serious or fatal injury accidents; the groups do not overlap. The grey horizontal line marks $O/E = 1$, where observed accidents equal the number expected from local weather frequency. Values above one indicate over-representation relative to that frequency, not a measured increase in risk per vehicle-kilometre.

4.2.1 Mean Wind

Figure 4.2 shows the main result: O/E is close to one at low and moderate mean wind speeds and rises in the upper intervals. At 20 m/s or above, the all-injury O/E is 2.15. Both injury groups show this upper-wind pattern, but the serious or fatal group contains few accidents. Differences between the bars should therefore not be read as evidence that wind changes injury severity.

The seasonal panels are less stable than the pooled result. In particular, some of the largest seasonal O/E values are based on only a few accidents, so they do not support ranking seasons or injury groups. The 5 m/s intervals are used as descriptive bins rather than physical wind thresholds.

4.2.2 Wind Gust

Wind gust shows a similar upper-tail pattern in Figure 4.3, with all-injury O/E 3.34 at gusts of at least 30 m/s. Both injury groups are above one in this interval. Gust and mean wind are related measurements from the same observation, so their agreement supports a general high-wind pattern rather than an independent replication. Seasonal extremes remain sparse.

4.2.3 Temperature

Temperature has a non-monotonic pattern in Figure 4.4: O/E is lower at moderate temperatures and higher in some colder and warmer intervals. Both injury groups show this broad shape, but seasonal extremes contain few accidents. The finding is secondary and does not establish a causal temperature effect.

Adding year to the station–season standardisation changes the selected O/E estimates only slightly. The pre-specified comparison is therefore retained as Q1.

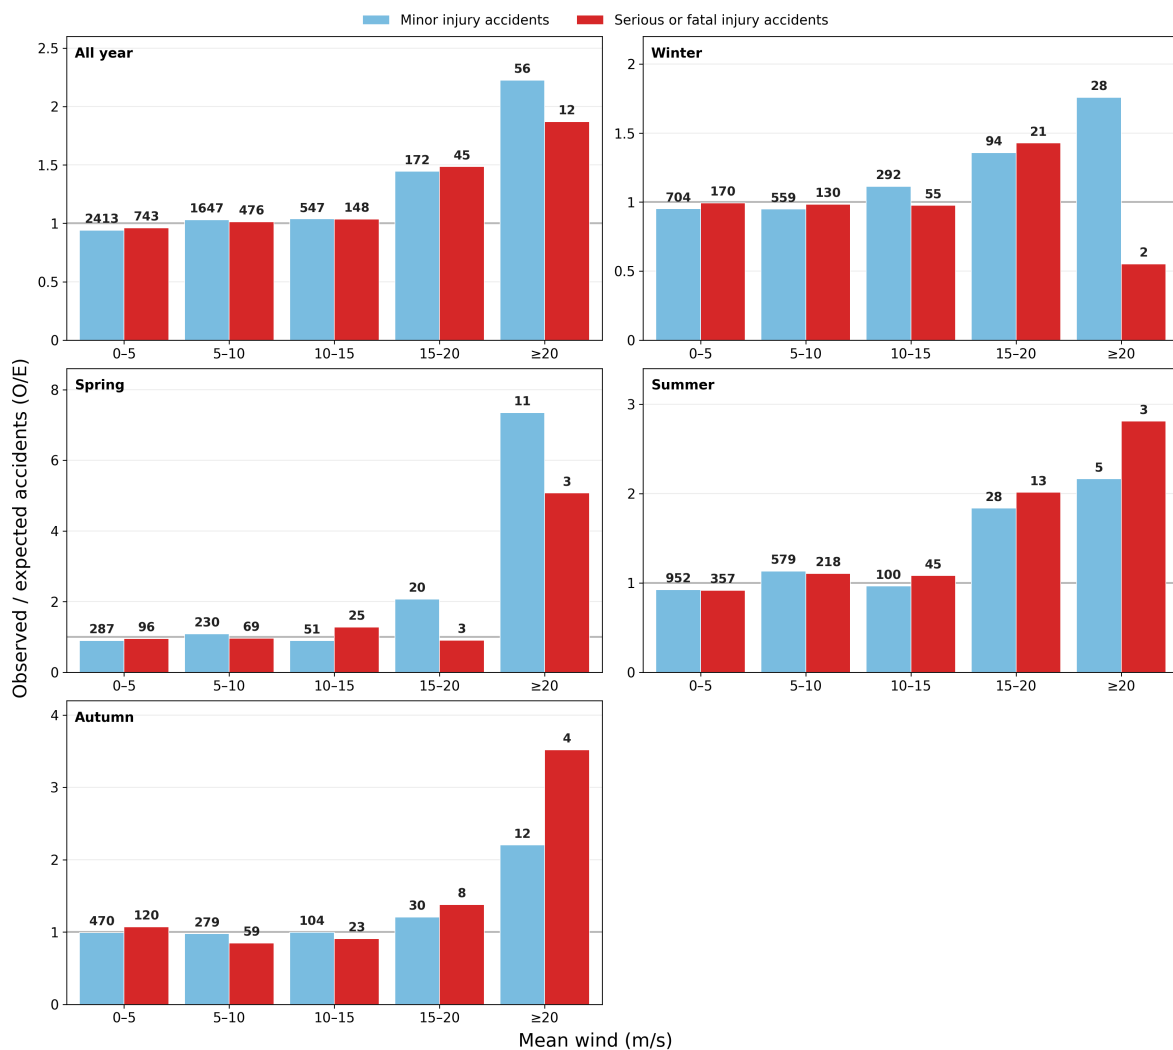


Figure 4.2: All-year and seasonal mean-wind O/E, 2007–2025. Blue bars show minor injury and red bars show serious or fatal injury. Expected counts are calculated from local station–season weather frequency separately for each group; labels above bars are observed accident counts. The grey reference line is $O/E = 1$. Seasonal upper-wind bars should be interpreted with their small observed counts.

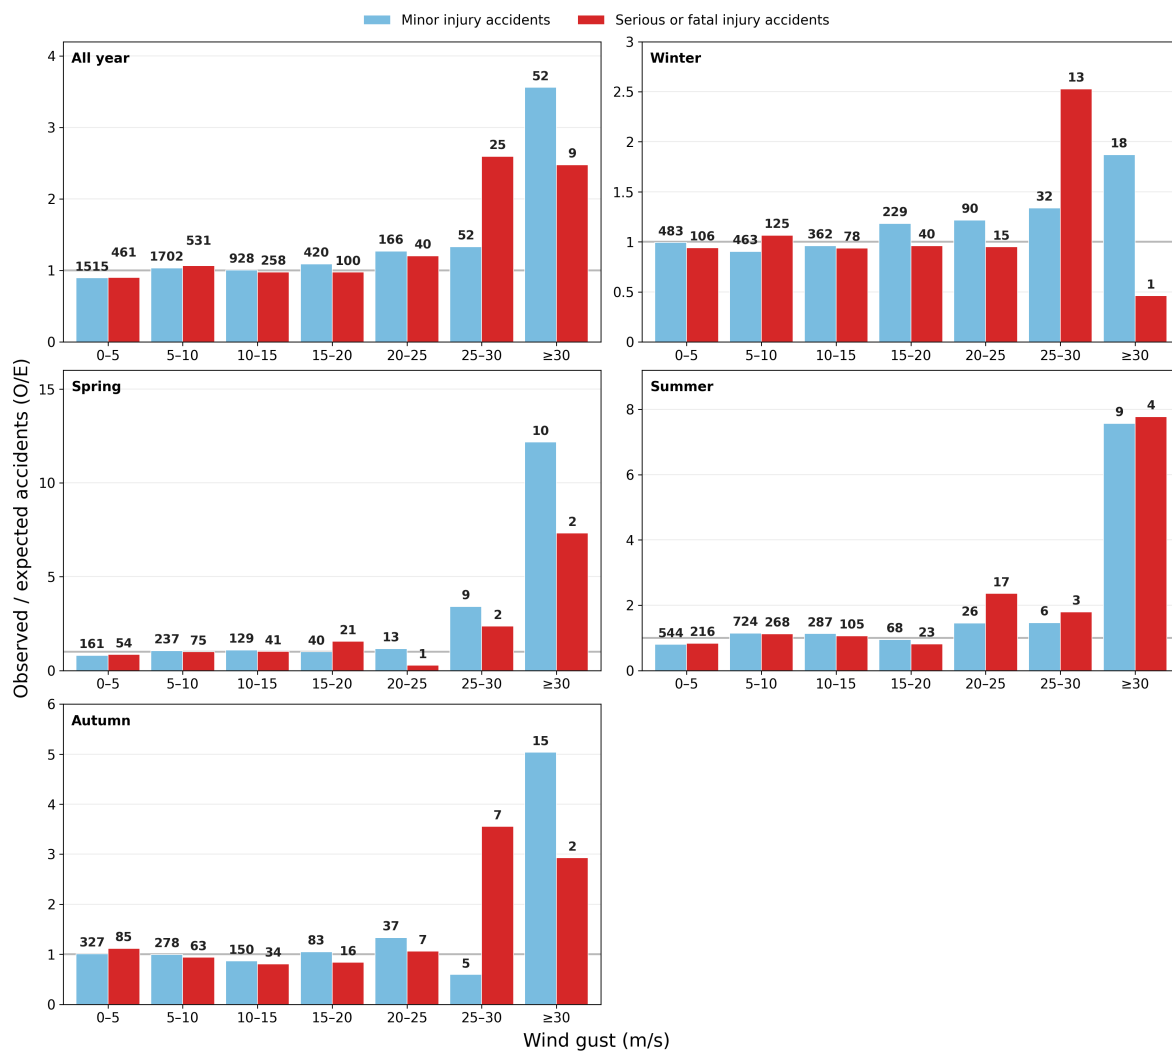


Figure 4.3: All-year and seasonal wind-gust O/E. Gust is taken from the same 10-minute observation as the accident-time mean wind and is not a daily maximum. Blue bars show minor injury and red bars show serious or fatal injury; labels above bars are observed accident counts. The grey reference line is $O/E = 1$. Several seasonal upper-gust cells contain few accidents and are therefore descriptive.

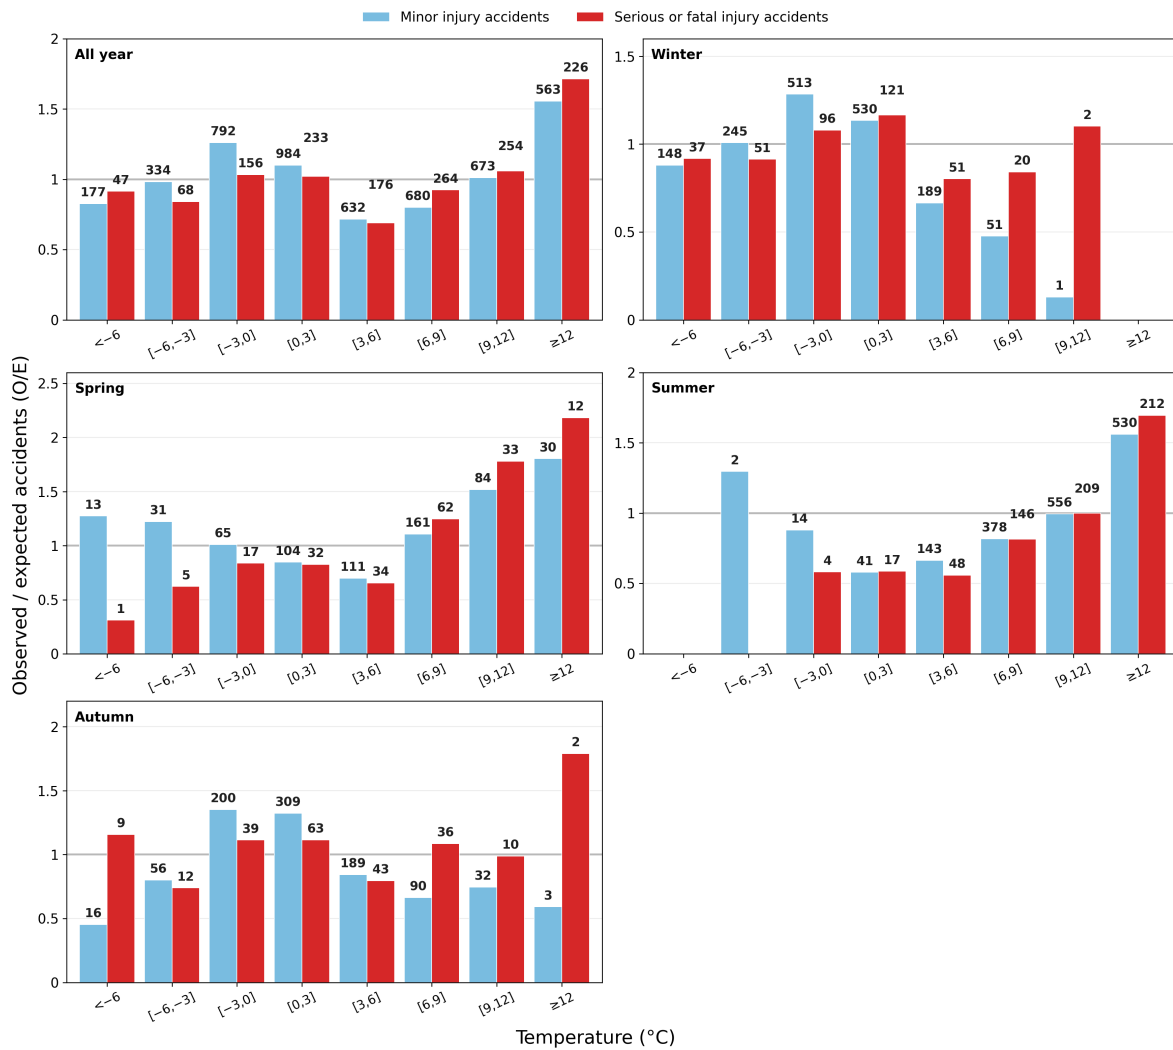


Figure 4.4: All-year and seasonal temperature O/E, standardised within matched temperature station and study season. Blue bars show minor injury and red bars show serious or fatal injury; labels above bars are observed accident counts. The grey reference line is $O/E = 1$. The non-monotonic pattern and sparse seasonal extremes are interpreted cautiously.

4.3 Traffic Response and Approximate O/E Correction

4.3.1 Traffic Behaviour and the Baseline Limitation

Figure 4.5 shows the traffic response underlying the correction. Values below 100% indicate less traffic than the counter's calendar expectation, not fewer accidents. The upper wind and gust intervals show reductions. Temperature is included because the existing response output also estimates that relationship; it does not define a new temperature Q3 rate.

This motivates an approximate correction under the assumption that the traffic response observed at the selected counters is informative for the wider road network. It does not establish the magnitude of a national per-vehicle-kilometre contrast, because the traffic response is estimated over a shorter period and from a geographically selective set of counters.

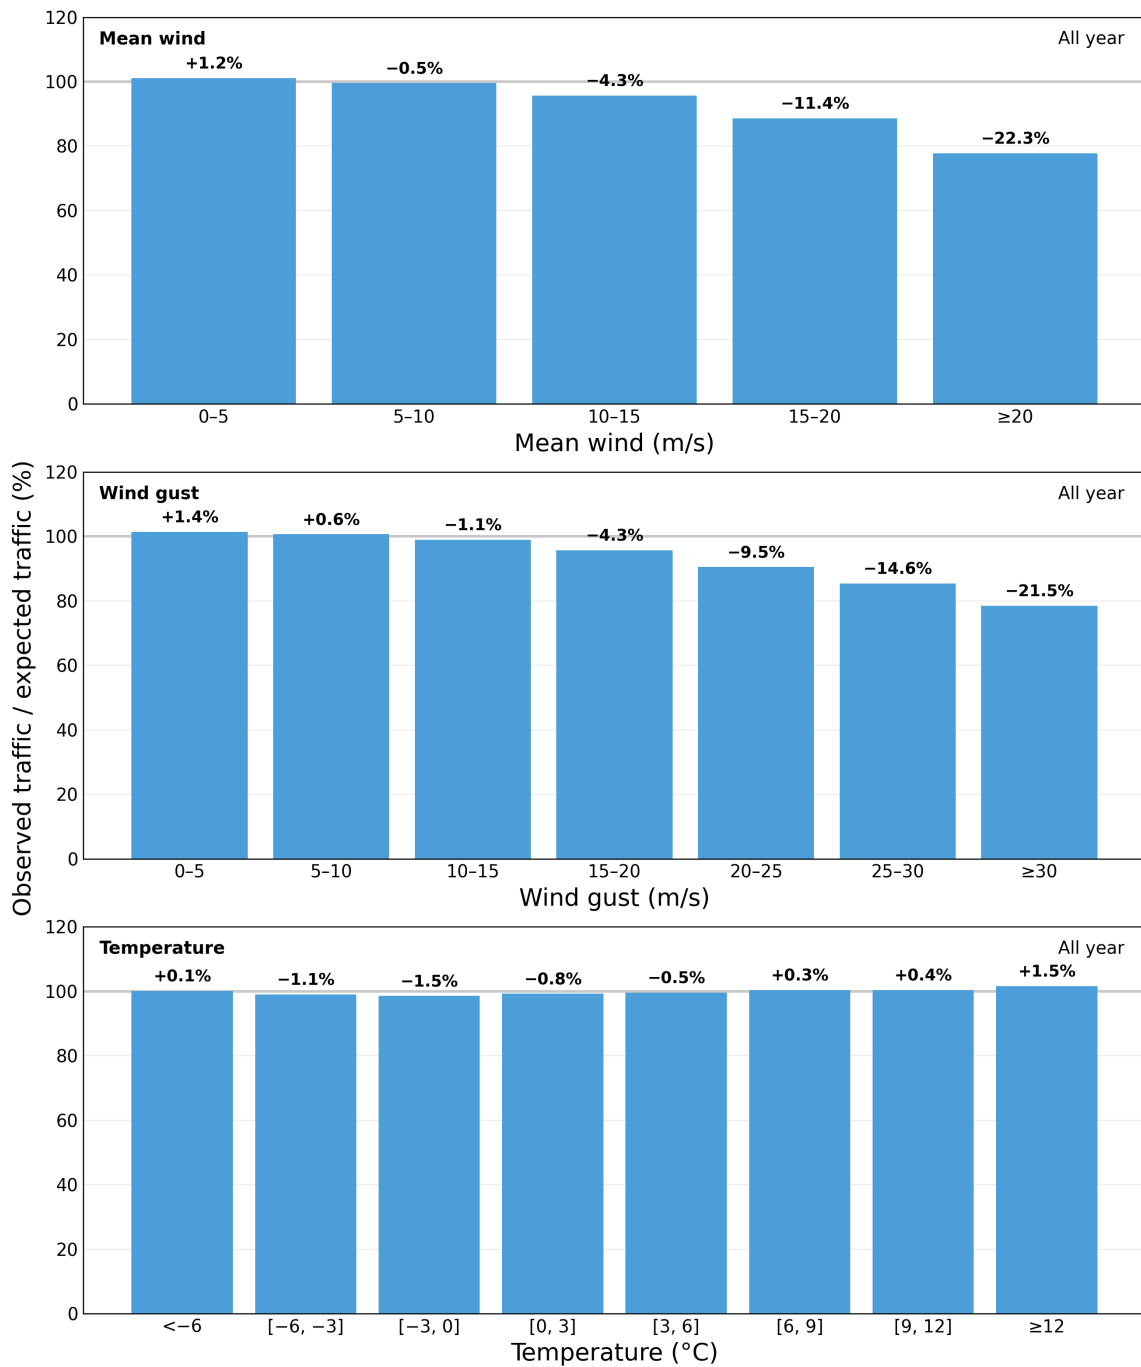


Figure 4.5: Observed daily traffic relative to expected traffic at counter sections, 2019–2024, pooled across seasons. The expectation uses the same section, year, month and weekday among positive-count days. Counts are allocated by observed 07:00–24:00 weather-bin minutes; bars show the ratio of pooled allocated observed to expected traffic. The line marks 100%; labels show percentage changes, not accident counts.

4.3.2 Full-Period Correction

The primary O/E uses weather time rather than vehicle exposure. Daily-counter data from 2019–2024 show that traffic is lower in the strongest wind and gust intervals, so Q2 applies the estimated counter response to the primary station–season denominator as a sensitivity analysis. The observed accident counts remain unchanged; only the expected distribution is reweighted.

The change is visible directly in Figures 4.6 and 4.7: upper-bin O/E rises from 2.15 to 2.71 for mean wind and from 3.34 to 4.20 for gust. Outlined bars show Q1 and filled teal bars show Q2 for the same all-injury population. Thus, accounting for lower traffic strengthens the high-wind contrast. The validated correction is available only for All year.

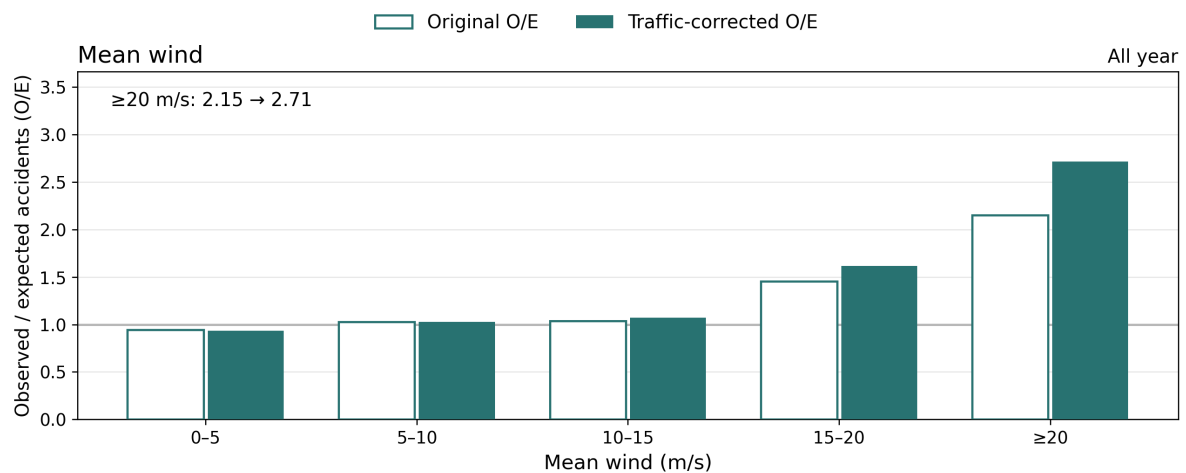


Figure 4.6: Original and approximately traffic-corrected mean-wind O/E for all qualifying rural injury accidents, 2007–2025, All year. Outlined bars use weather frequency; teal bars reweight it using the 2019–2024 counter response. The annotation highlights the upper-bin change; the reference line is $O/E = 1$. Extrapolation beyond the counters and absence of hourly traffic make this a model-based sensitivity analysis.

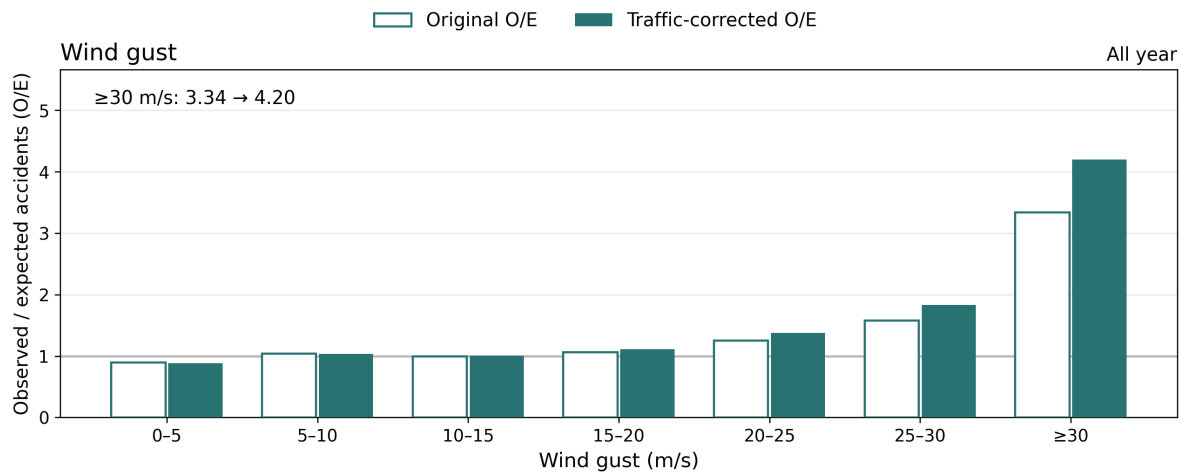


Figure 4.7: Original and approximately traffic-corrected wind-gust O/E for all qualifying rural injury accidents, 2007–2025, All year. Outlined and teal bars use the original and reweighted expected counts, respectively. The annotation highlights the upper-bin change; the reference line is $O/E = 1$. The 2019–2024 daily-counter response is extrapolated to the wider population and does not identify hourly traffic exposure.

Figure 4.8 retains the corrected comparison separately for minor injury and serious or fatal injury, matching Q1’s two groups. This shows whether the corrected upper-wind pattern is shared across injury categories. Differences between the bars are not a test of severity, particularly where the serious or fatal counts are small.

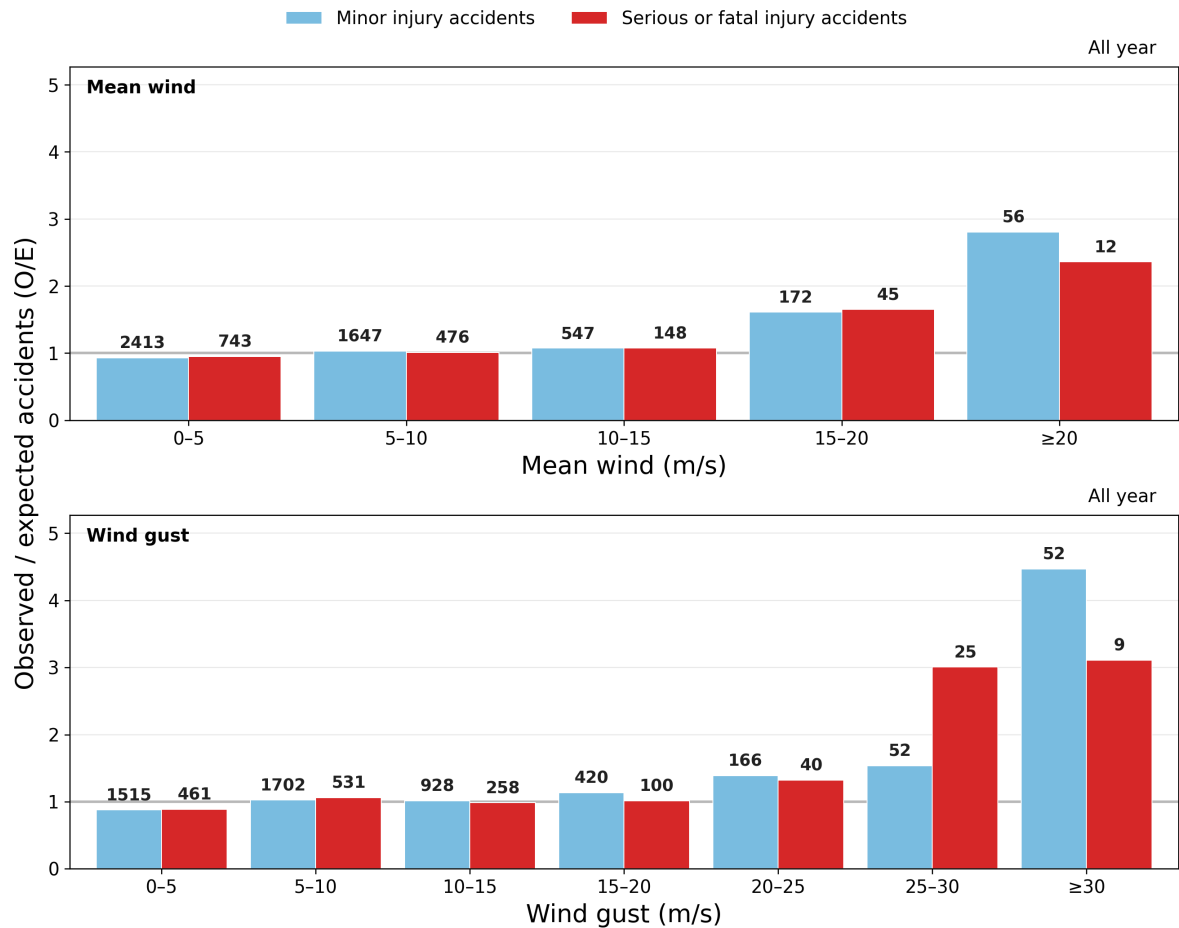


Figure 4.8: Approximately traffic-corrected mean-wind and gust O/E, 2007–2025, All year. Blue and red bars represent minor injury and serious or fatal injury. Each group's expected count is reweighted using the 2019–2024 counter response; labels give observed counts. The line marks $O/E = 1$. These disjoint groups complement the all-injury original–corrected comparison; the same extrapolation and hourly-traffic limitations apply.

4.3.3 Period Comparison and Counter-Era Correction

Figures 4.9 and 4.10 show the period comparison for mean wind, gust and temperature. Each figure pools accidents and background weather over its stated years. These are All year comparisons for different periods, not seasonal estimates or replacements for the full-period Q1 figures. Upper-bin counts should be read alongside the bar heights when comparing the periods.

Figure 4.11 shows the existing correction restricted to 2019–2024, including its temperature result. Its minor-injury and serious or fatal bars can be compared with Figure 4.10, which uses the same population without traffic reweighting. This sensitivity output uses the shorter period's weather background; it must not be substituted for Q2's full-period estimates. Its temperature panel concerns corrected weather-frequency O/E, not the Q3 traffic-based rate method.

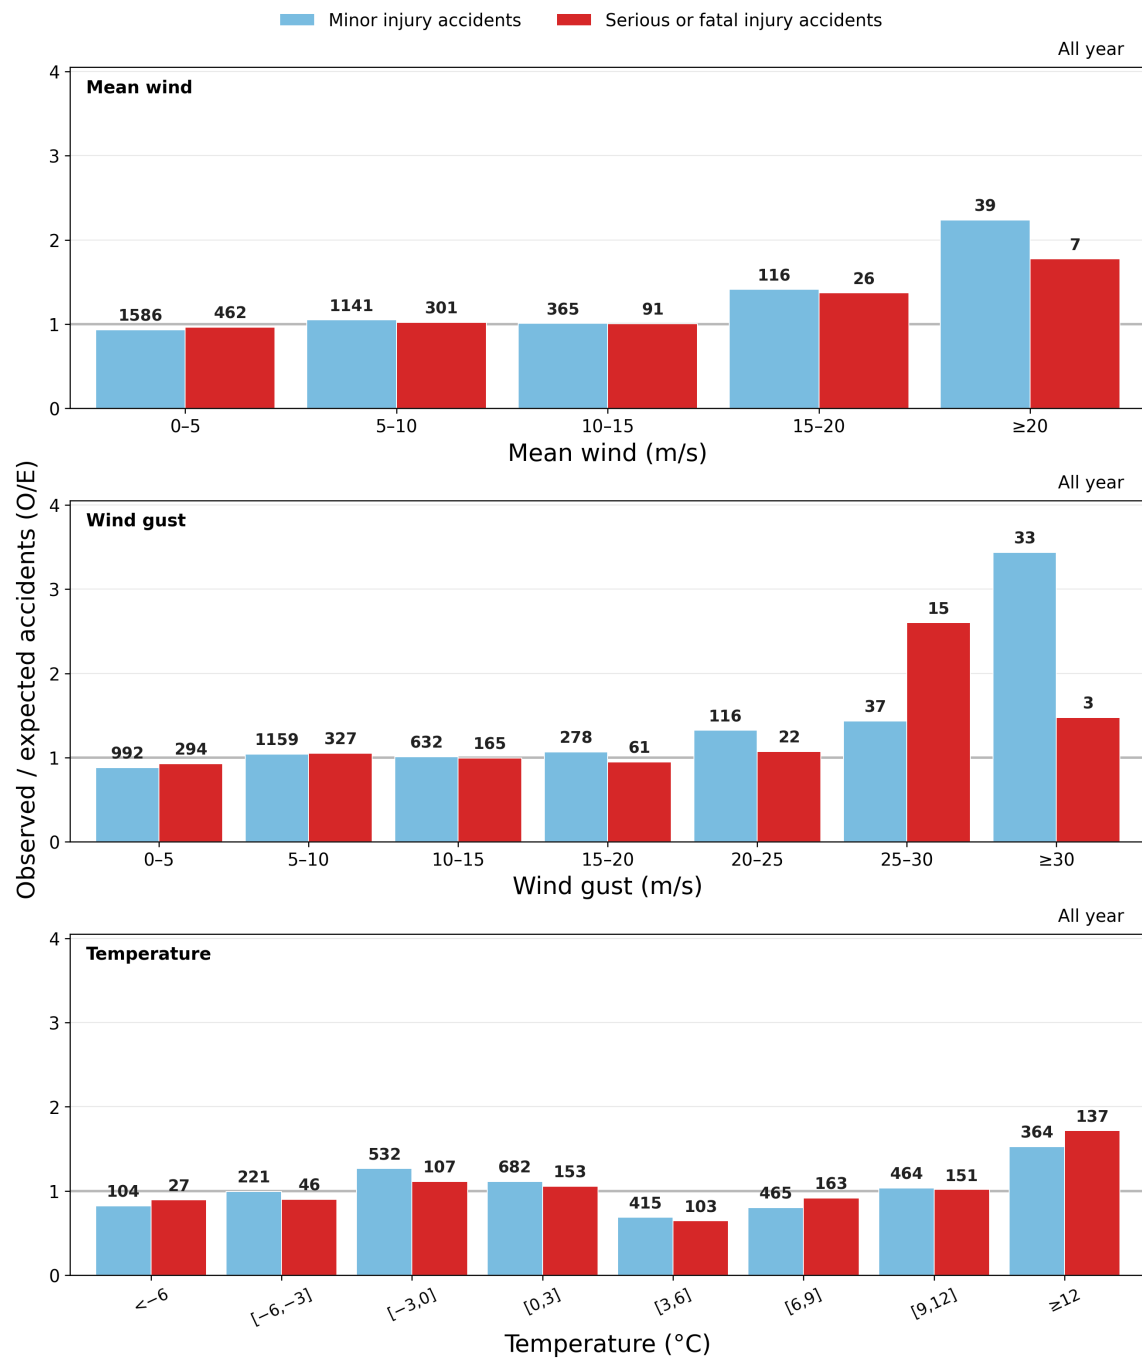


Figure 4.9: Period comparison: All year weather-frequency O/E for rural injury accidents in 2007–2018. Accident counts and station–season background weather are restricted to the same years. Blue and red bars show minor injury and serious or fatal injury separately; labels are accident counts. The line marks $O/E = 1$. This period-specific comparison contains no traffic adjustment and should be interpreted with its sparse upper bins.

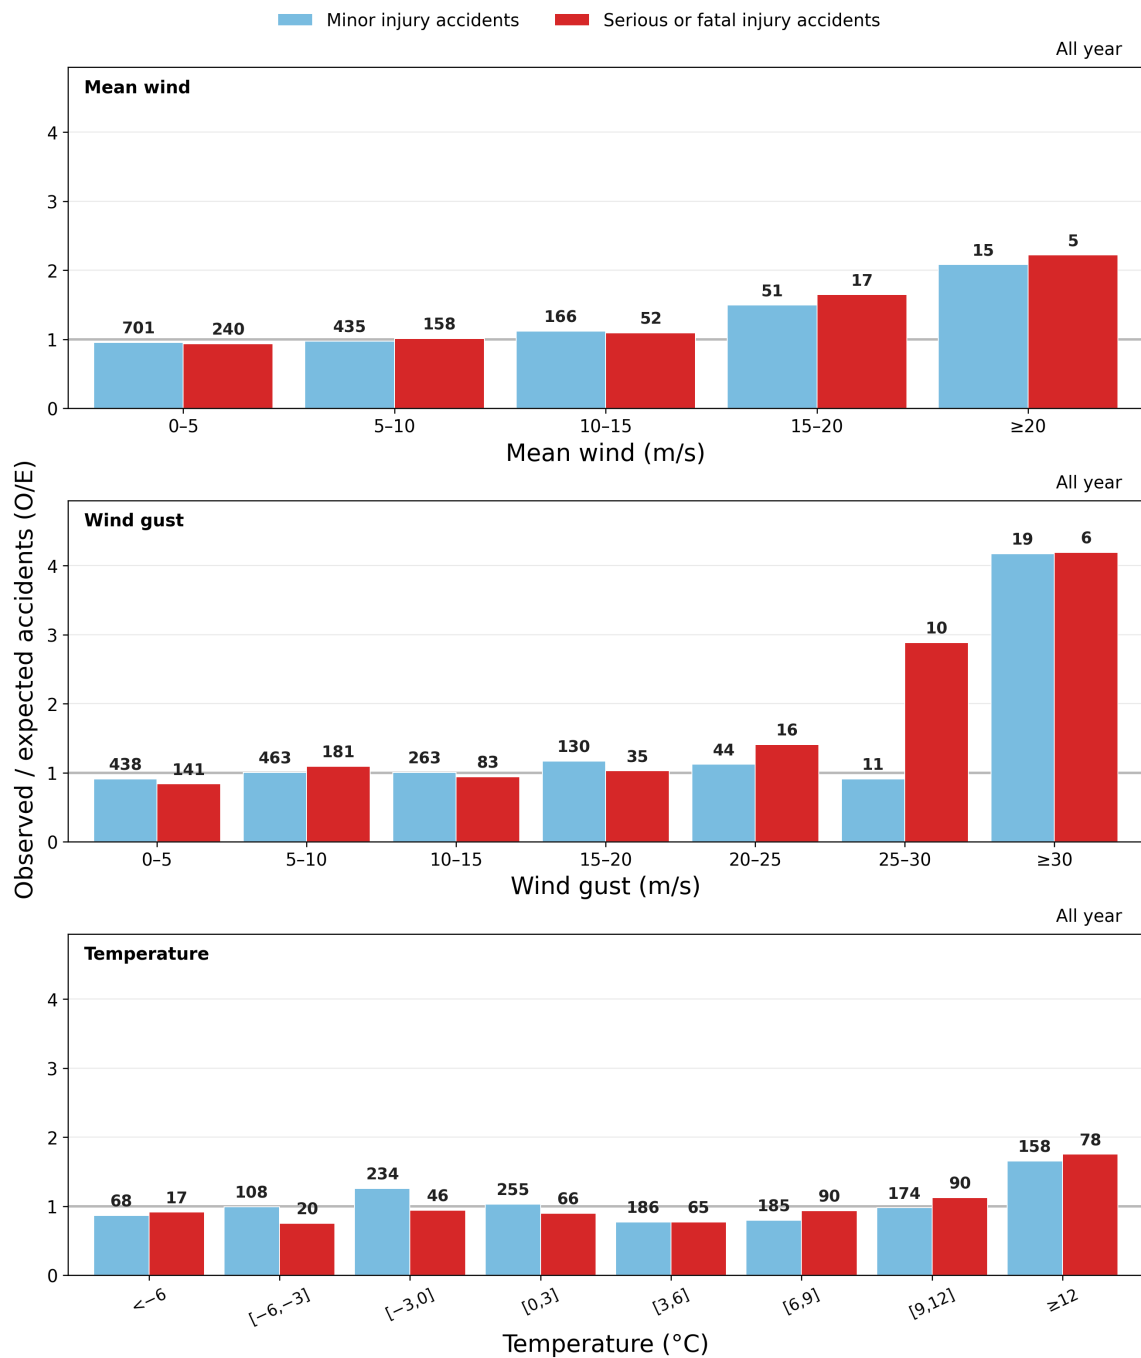


Figure 4.10: Period comparison: All year weather-frequency O/E for rural injury accidents in 2019–2024. Accident counts and station–season background weather are restricted to the same years. Blue and red bars show minor injury and serious or fatal injury separately; labels are accident counts. The line marks $O/E = 1$. This period-specific comparison contains no traffic adjustment and should be interpreted with its sparse upper bins.

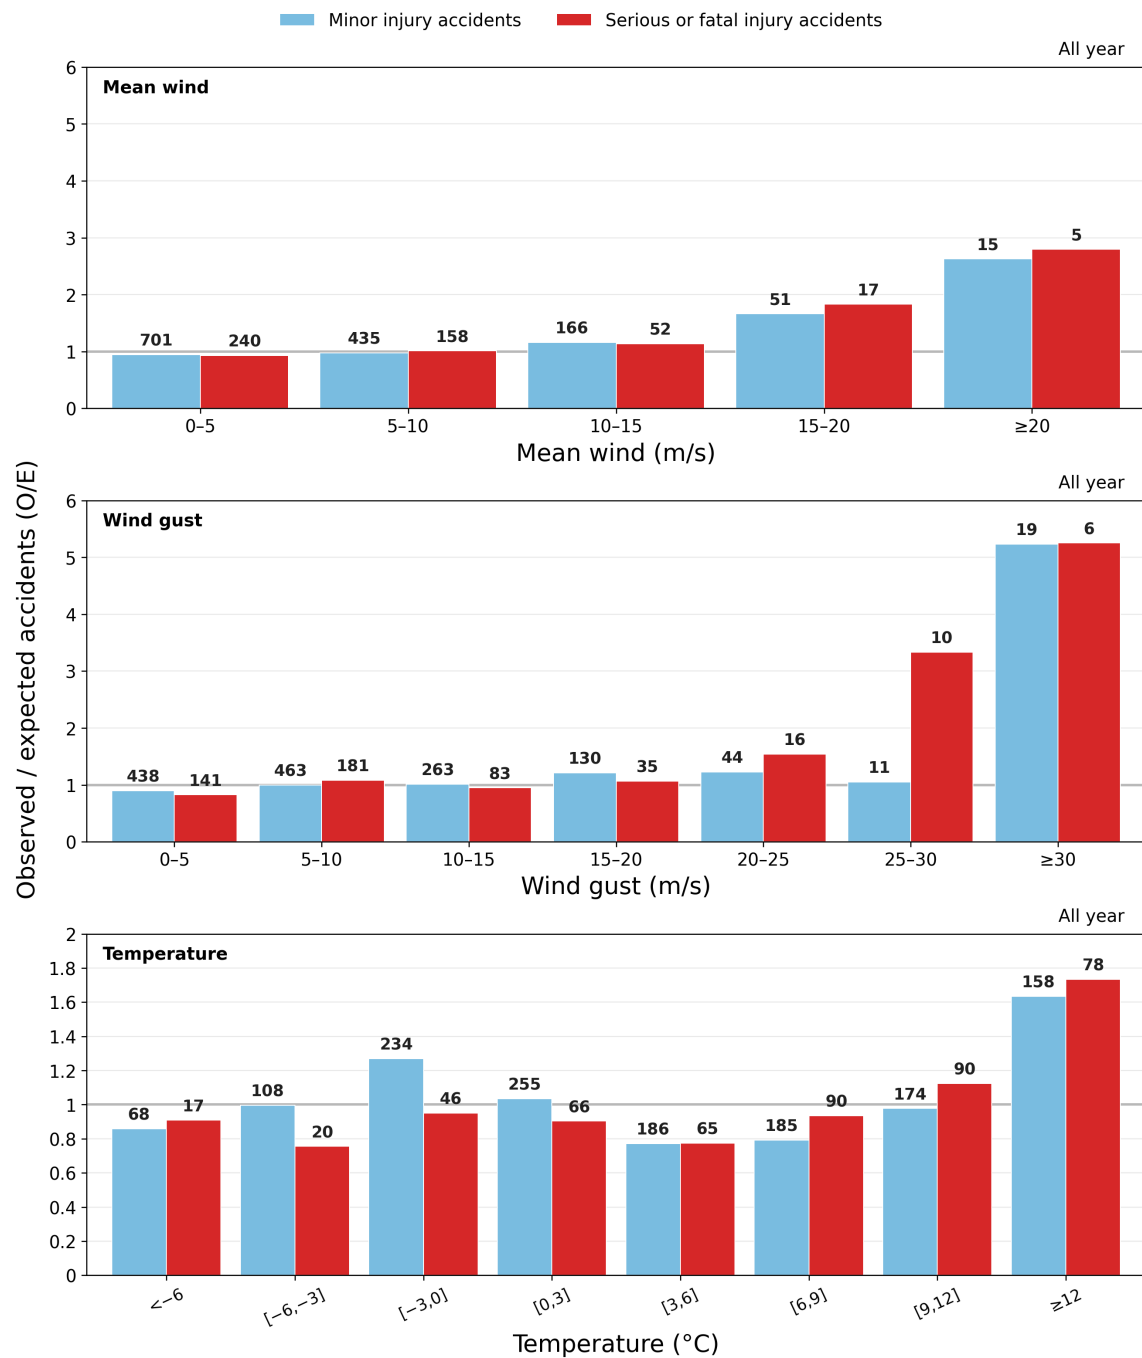


Figure 4.11: Approximately traffic-corrected O/E for qualifying rural injury accidents, 2019–2024, All year. Blue and red bars show minor injury and serious or fatal injury using reweighted expected counts within that period. Labels give observed accidents; the line marks $O/E = 1$. The daily-counter response includes mean wind, gust and temperature, but hourly traffic is still unobserved. This is the correction within the counter era.

4.4 Counter-Based Accident Rates

The third stage estimates accident rates in the smaller sample linked to daily traffic counters. It includes 694 accidents, 533,649 eligible counter-section days and approximately 5.63 billion estimated vehicle-kilometres. Table 4.3 gives the accident counts, exposure and rates for each wind interval. The main method uses monthly weather frequencies; the same-day allocation sensitivity in the following section tests that choice. Both constructions are defined in the Q3 Methods.

Table 4.3: Monthly-frequency daily-counter rates, 2019–2024. Estimated exposure equals the observed daily traffic count times rural section length, allocated across weather intervals using the assigned station’s pooled 2007–2025 calendar-month weather frequency for 07:00–24:00.

Measure	Interval (m/s)	Accidents	Million vehicle-km	Accidents per million vehicle-km
Mean wind	0–5	344	3011.5	0.114
Mean wind	5–10	210	1963.5	0.107
Mean wind	10–15	96	539.9	0.178
Mean wind	15–20	33	98.9	0.334
Mean wind	≥20	11	16.5	0.667
Gust	0–5	205	1840.9	0.111
Gust	5–10	238	2133.5	0.112
Gust	10–15	129	1085.1	0.119
Gust	15–20	70	400.3	0.175
Gust	20–25	29	123.3	0.235
Gust	25–30	12	34.5	0.348
Gust	≥30	11	12.7	0.866

Rates rise markedly in the upper wind intervals. At mean wind of at least 20 m/s, the rate is 5.83 times the 0–5 m/s rate; for gusts of at least 30 m/s, the contrast is 7.78. Only 11 accidents contribute to each upper interval, so these large differences are imprecise. The selective counter coverage also limits their generalisability.

4.4.1 All Year Rates

Figure 4.12 shows the pooled wind and gust rates. The light-blue and red components share estimated exposure, so their stack height is the all-injury rate. Counts identify how many accidents contribute; the bars are not a formal comparison of injury severity.

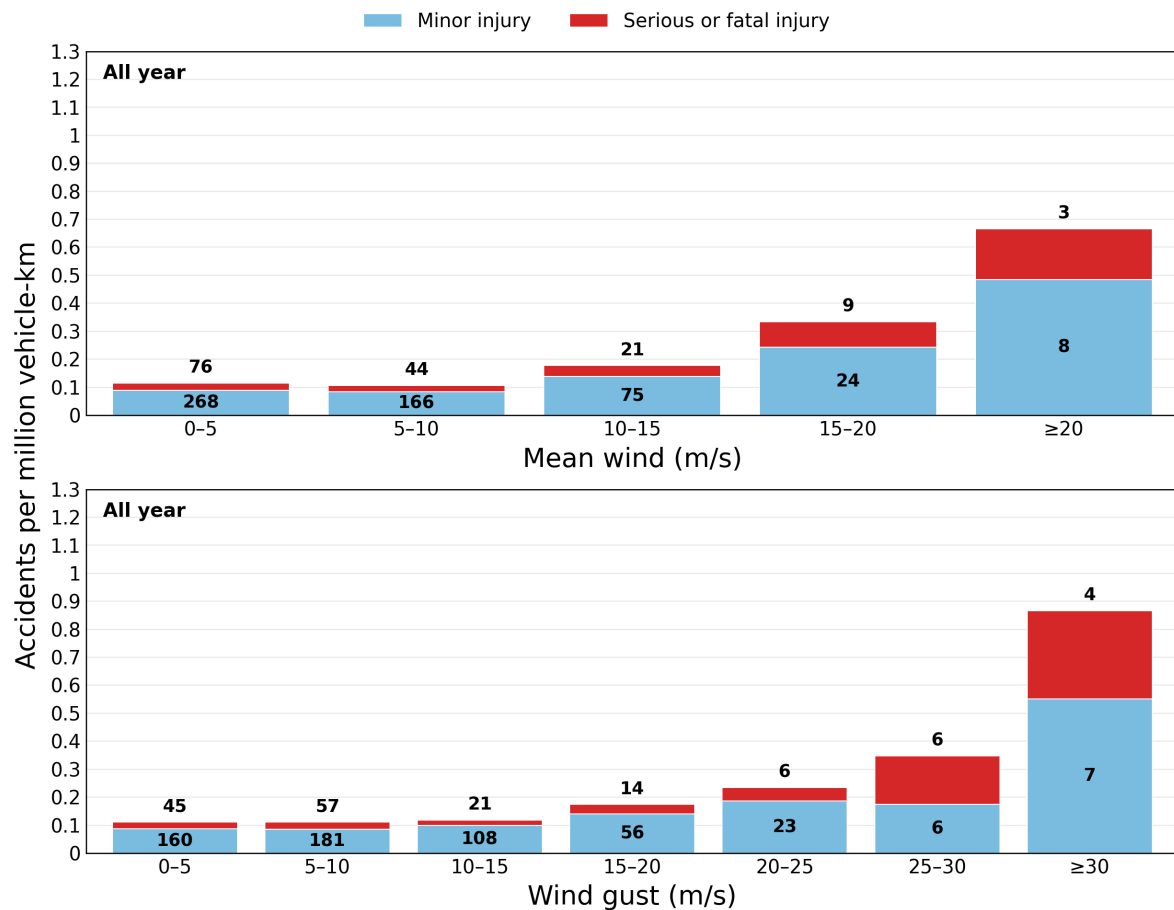


Figure 4.12: Rural injury-accident rates per million vehicle-km, 2019–2024, All year. Event-time wind and gust classify the accidents; daily traffic, rural length and pooled station-month weather frequencies define estimated exposure. Light blue is minor injury; red is serious or fatal injury. The stacked components sum to the all-injury rate; positive labels give counts. Full daily traffic is allocated using 07:00–24:00 weather frequencies; hourly traffic is unobserved.

4.4.2 Mean Wind by Season

Figure 4.13 shows how the mean-wind pattern varies by season. Seasonal intervals combine the upper tail at 15 m/s; counts and exposure are summed before calculating each rate. Blue and red stacks show the minor and serious or fatal components of each all-injury rate, sharing the same exposure. Positive counts identify sparse cells; segment sizes are not a formal severity comparison. These panels are descriptive: a season with no observed accident in an interval is not necessarily free of risk.

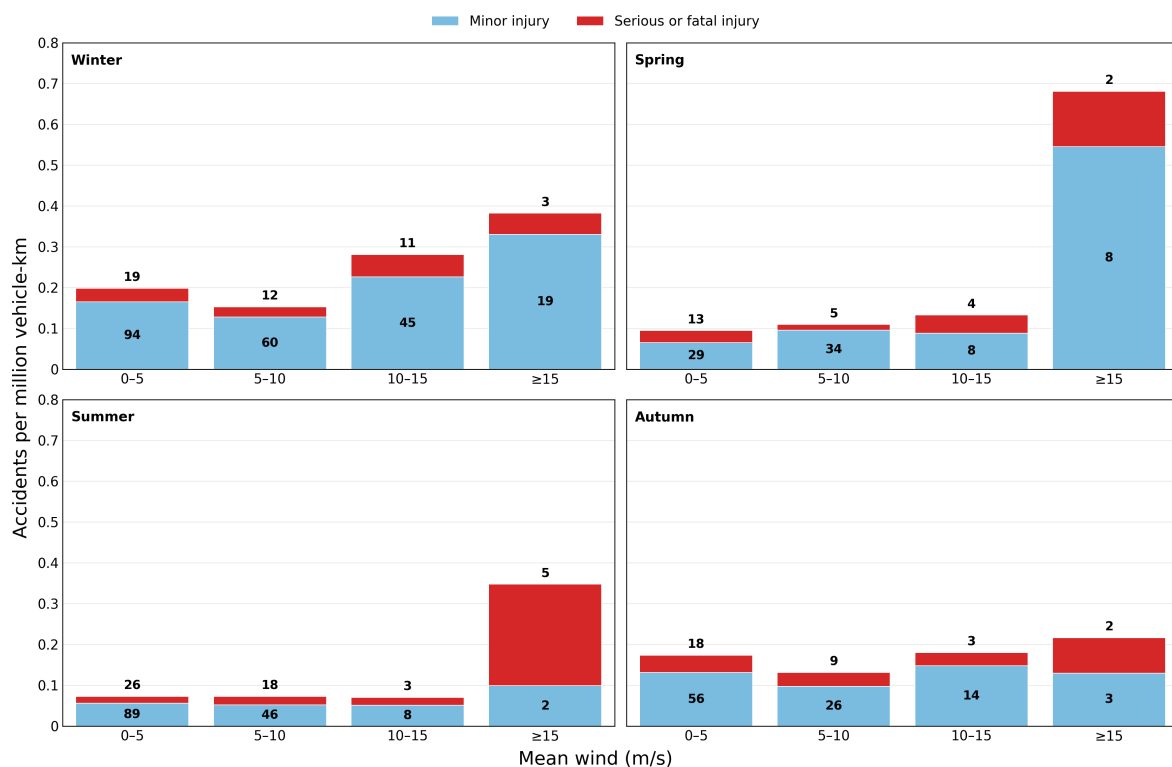


Figure 4.13: Rural injury-accident rates by mean wind, 2019–2024, by season. Blue is minor injury and red serious or fatal injury; the groups are disjoint. The stacked components share the same exposure denominator and sum to the all-injury rate. Estimated vehicle-km use daily traffic, rural length and pooled monthly weather frequencies. Upper seasonal intervals are combined; labels show positive accident counts; zero counts are unlabelled. Sparse cells and unobserved hourly traffic limit interpretation.

4.4.3 Wind Gust by Season

Figure 4.14 shows the corresponding stacked gust pattern, with seasonal gust intervals combined at 20 m/s. The upper-bin accidents are spread thinly across seasons, so the panels do not establish seasonal differences. The main monthly-allocation method supports mean wind and gust only. Temperature is available in the same-day sensitivity below.

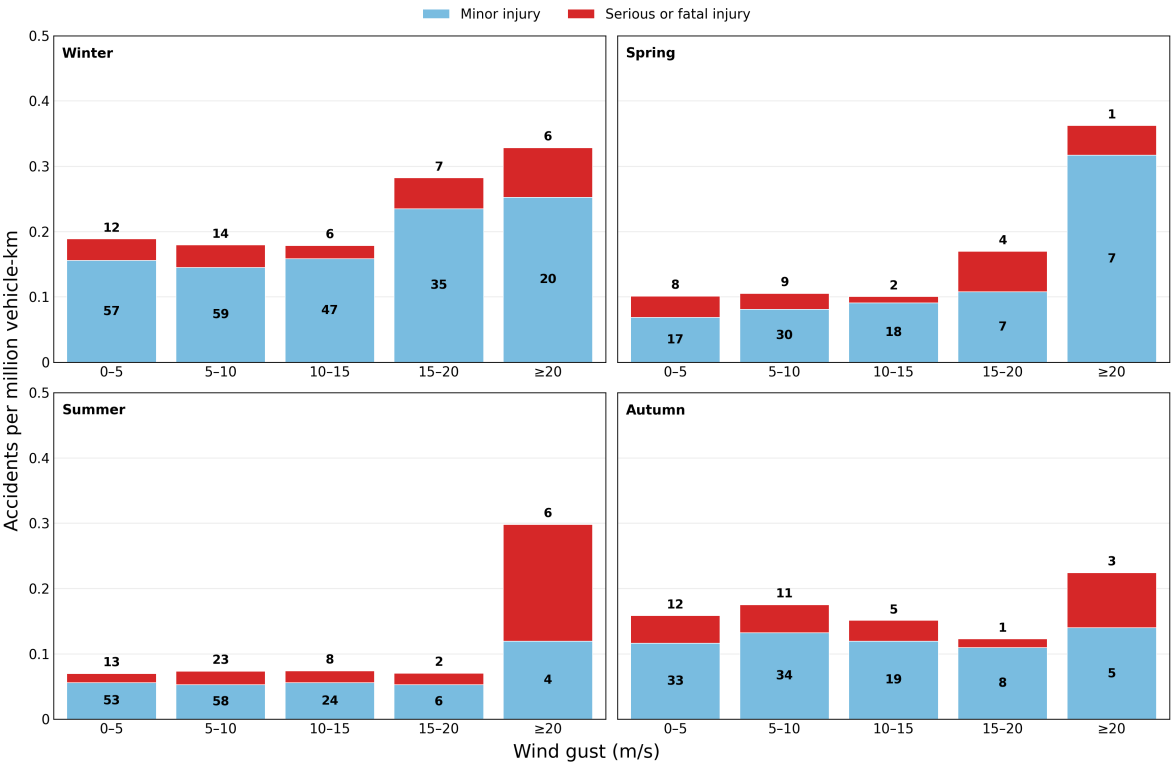


Figure 4.14: Rural injury-accident rates by gust, 2019–2024, by season. Blue is minor injury and red serious or fatal injury; the groups are disjoint. The stacked components share the same exposure denominator and sum to the all-injury rate. Estimated vehicle-km use daily traffic, rural length and pooled monthly weather frequencies. Upper seasonal intervals are combined; labels show positive accident counts; zero counts are unlabelled. Sparse cells and unobserved hourly traffic limit interpretation.

A stratified diagnostic gives smaller upper-bin contrasts when the comparison is made within counter-section-year-season strata: O/E is 3.39 for mean wind and 4.84 for gust. This suggests that sample and road-exposure composition contribute to the larger pooled traffic-based rate ratios. The interpretation of this difference is considered in Chapter 5 rather than treated as a separate main result here.

Table 4.4 summarises the headline wind and gust results for Q1–Q3. Read each estimate against its stated denominator: the table is an interpretation guide, not a ranking of estimates of one quantity.

Table 4.4: Headline mean-wind and gust results for Q1–Q3. Q1 and Q2 report observed-to-expected ratios; Q3 reports the upper-bin rate divided by the 0–5 m/s rate. The estimates use different denominators and are not repeated estimates of one parameter. Q3 uses a smaller counter-linked sample, with 11 accidents in each upper interval.

Parameter	Method	Comparison	Estimate	Denominator
Mean wind	Q1	≥ 20 m/s	O/E 2.15	Local weather frequency
Mean wind	Q2	≥ 20 m/s	O/E 2.71	Traffic-reweighted weather frequency
Mean wind	Q3	≥ 20 m/s vs 0–5	5.83×	Estimated distance travelled
Wind gust	Q1	≥ 30 m/s	O/E 3.34	Local weather frequency
Wind gust	Q2	≥ 30 m/s	O/E 4.20	Traffic-reweighted weather frequency
Wind gust	Q3	≥ 30 m/s vs 0–5	7.78×	Estimated distance travelled

4.5 Same-Day Weather Allocation Sensitivity

Figure 4.15 and the seasonal Figures 4.16, 4.17 and 4.18 present the same-day weather allocation sensitivity. These figures test sensitivity to the allocation assumption; the monthly-frequency method remains the main traffic-rate analysis. The same 694 linked accidents are classified by accident-time weather, but exposure follows the weather observed on each counter-day and excludes unobserved weather time. The resulting rates therefore have a different denominator from the monthly method. Their agreement in the broad wind pattern is more informative than a direct comparison of magnitudes.

The wind and gust seasonal plots combine upper intervals to reduce sparse cells: mean wind ends at 15 m/s or above and gust at 20 m/s or above. All year retains the finer intervals. Temperature retains its existing intervals throughout. This difference in binning must be considered before comparing panel heights; no seasonal rank or causal effect follows from the largest bar.

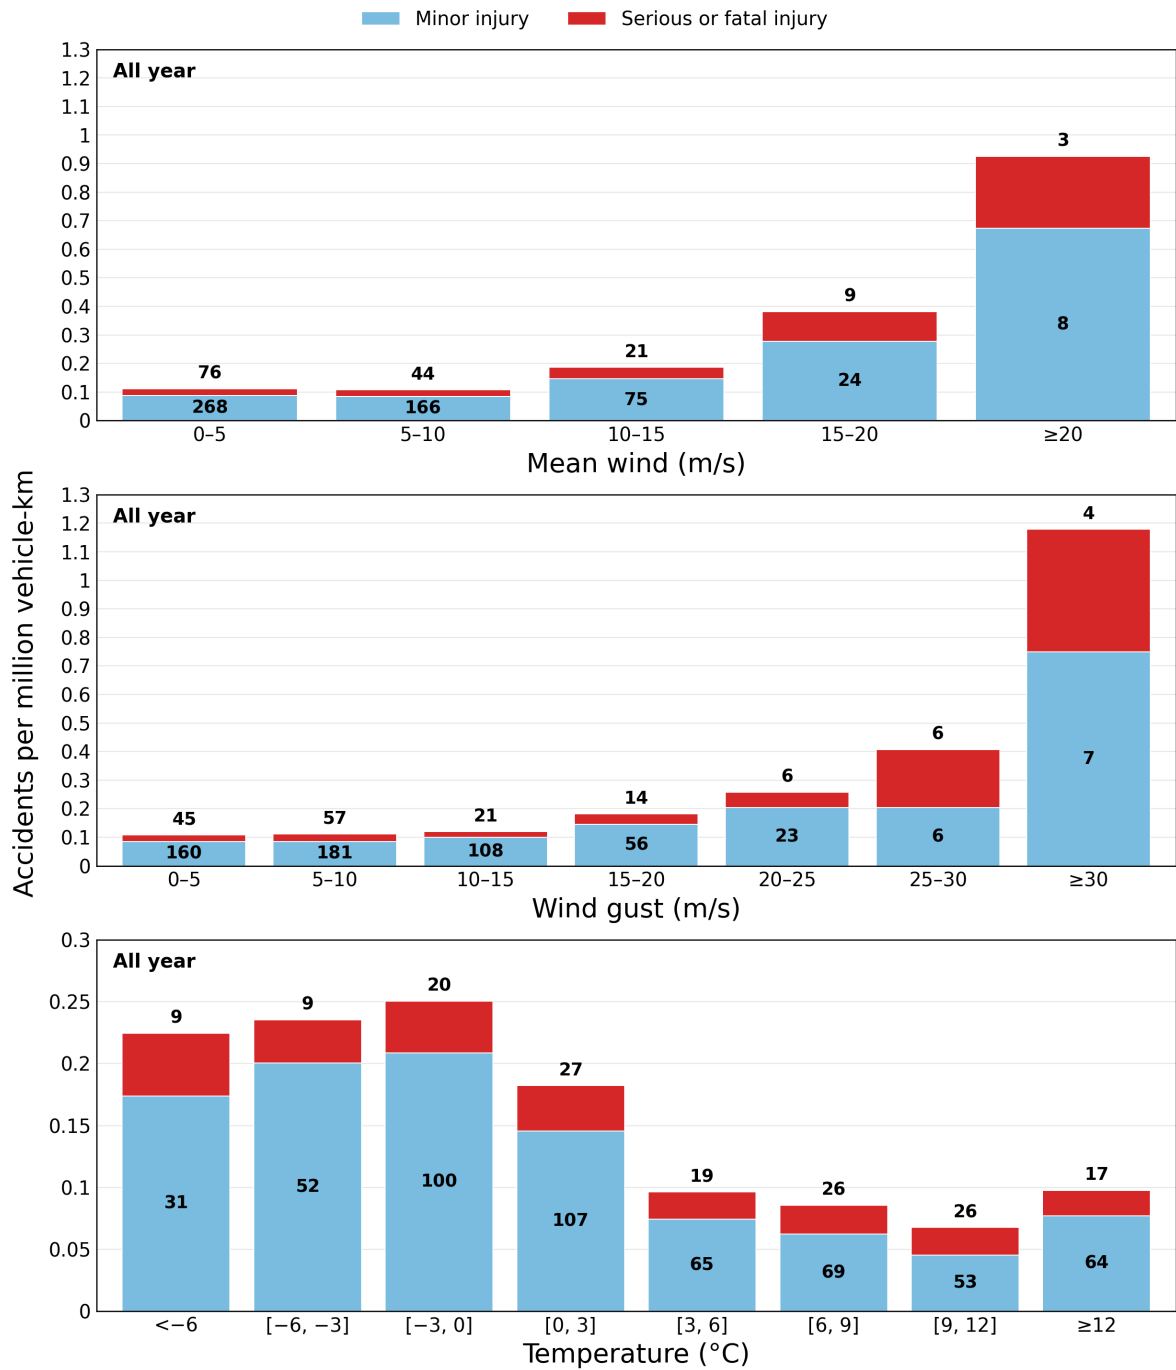


Figure 4.15: Same-day weather allocation sensitivity for rural injury accidents, 2019–2024, All year. The numerator uses event-time weather; exposure is daily traffic times rural length times observed bin minutes within 07:00–24:00 divided by 1,020. Unobserved weather minutes contribute no exposure. Light-blue minor and red serious or fatal rates share this denominator; positive labels give counts. Parameter-specific scales follow the original presentation. Daily counts do not measure hourly traffic.

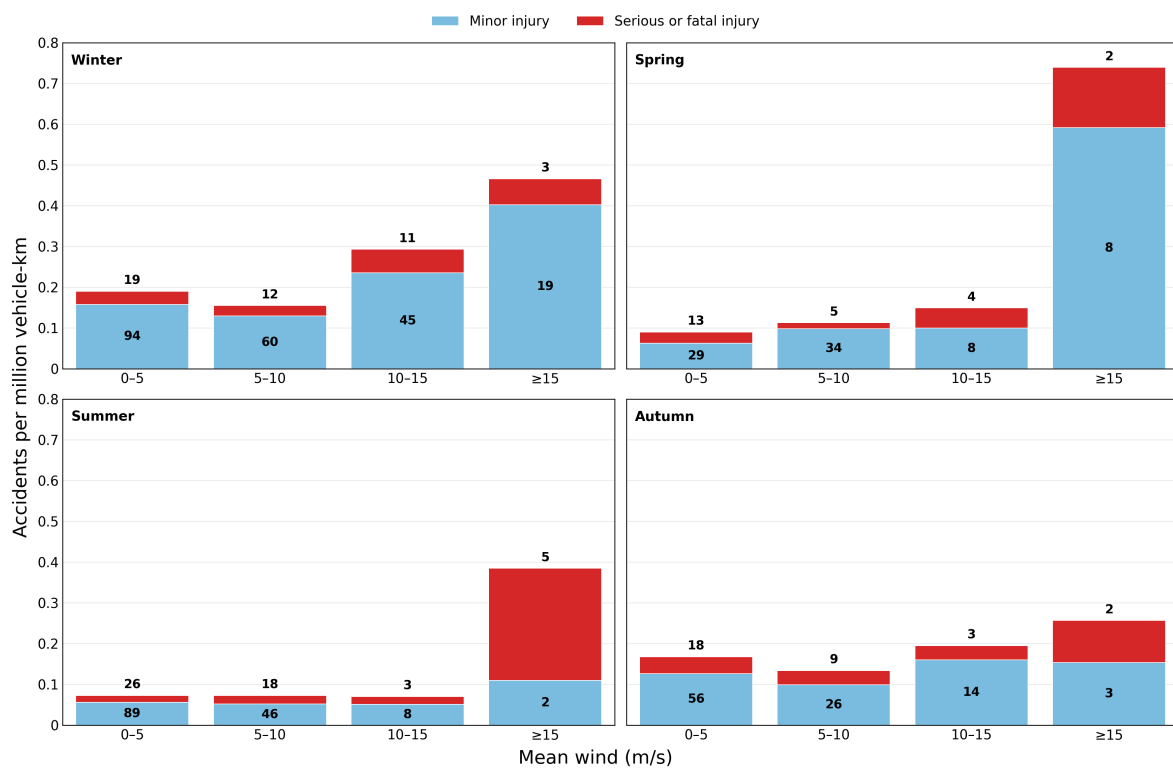


Figure 4.16: Same-day mean-wind accident rates per million vehicle-km, 2019–2024. Estimated exposure allocates daily traffic using that day’s 07:00–24:00 weather, excluding unobserved weather time. Blue and red stacks show minor injury and serious or fatal injury; readable positive counts are labelled. Seasonal upper bins are combined as described in the text. This is a sensitivity to same-day rather than monthly exposure allocation.

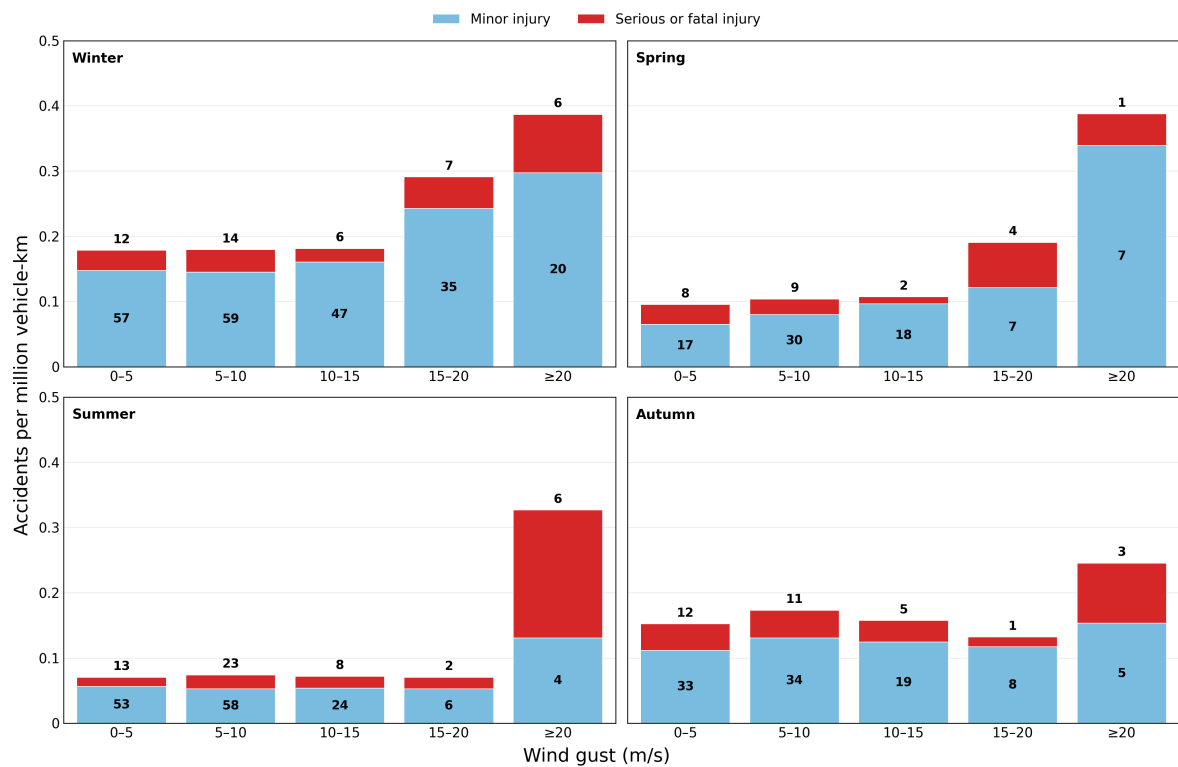


Figure 4.17: Same-day wind-gust accident rates per million vehicle-km, 2019–2024. Estimated exposure allocates daily traffic using that day’s 07:00–24:00 weather, excluding unobserved weather time. Blue and red stacks show minor injury and serious or fatal injury; readable positive counts are labelled. Seasonal upper bins are combined as described in the text. This is a sensitivity to same-day rather than monthly exposure allocation.

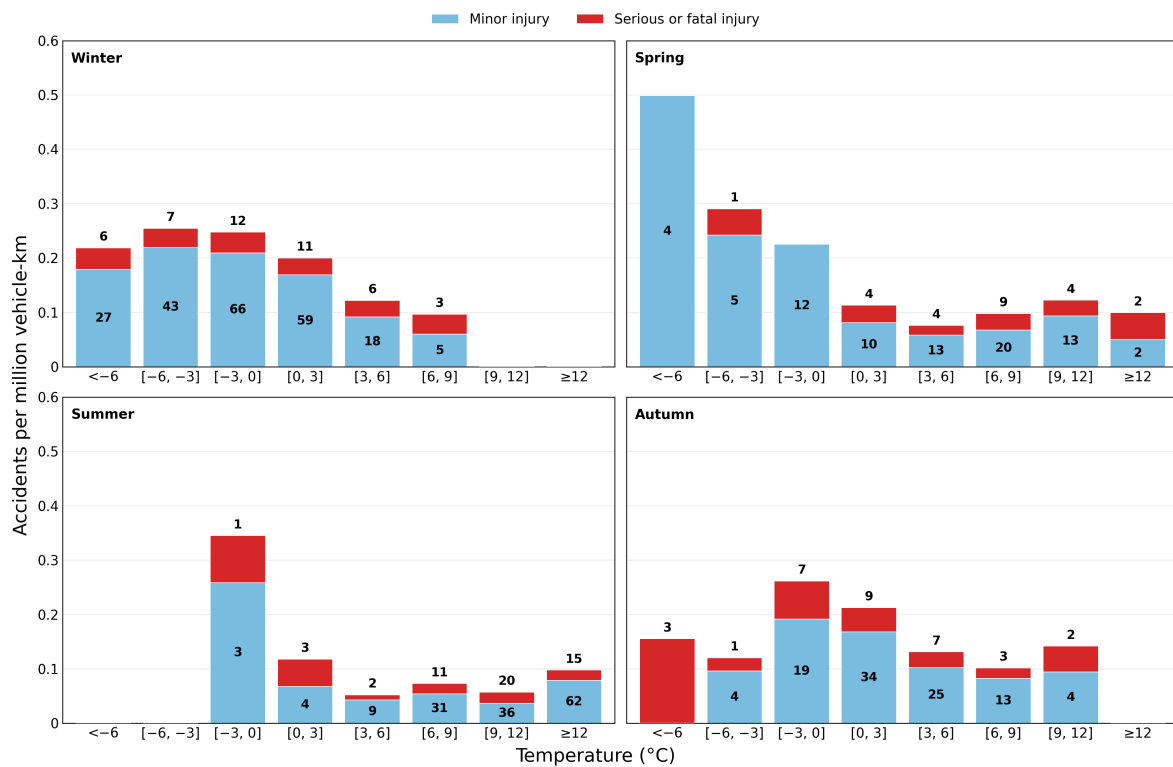


Figure 4.18: Same-day temperature accident rates per million vehicle-km, 2019–2024. Estimated exposure allocates daily traffic using that day's 07:00–24:00 weather, excluding unobserved weather time. Blue and red stacks show minor injury and serious or fatal injury; readable positive counts are labelled. This is a sensitivity to same-day rather than monthly exposure allocation.

4.6 Secondary Robustness Checks

These checks use different statistical conditioning or distinct traffic models. The period and allocation sensitivities above directly address Q2 and Q3; the following checks test other aspects of the wind association.

4.6.1 Matched-Time and Secondary Weather Checks

The matched-time comparison tests whether the wind pattern persists after controlling for station and recurring calendar time. Table 4.5 shows an upper-wind association, with lower and moderate contrasts near one. This check does not control unusual traffic or road conditions on a particular day.

Table 4.5: Selected matched-time contrasts. Each model uses 6,257 accident strata; the joint wind contrast includes temperature. Intervals are 95% confidence intervals.

Comparison	OR	95% CI
Mean wind: ≥ 15 vs 0–5 m/s	1.61	1.38–1.87
Mean wind, with temperature: ≥ 15 vs 0–5 m/s	1.68	1.44–1.96
Gust: ≥ 30 vs 0–10 m/s	2.74	1.96–3.85
Temperature: $-3-0$ vs $0-3$ °C	1.13	1.02–1.25
Temperature: $3-6$ vs $0-3$ °C	0.59	0.53–0.65
Temperature: ≥ 15 vs $0-3$ °C	0.99	0.80–1.23

The gust model also rises in the upper intervals, whereas the temperature results remain non-monotonic. Including temperature in the mean-wind model changes the upper-wind estimate only slightly. The matched-time temperature result reproduces the dip at moderate temperatures but not the warm-end increase seen in Q1, reinforcing the cautious interpretation of temperature.

Daylight and severity provide additional context. Few matched sets change daylight class, making those estimates imprecise. The adjusted severity model provides no clear evidence of greater severity during strong wind once an injury accident has occurred (Appendix Table A.1). A matched-time wind-by-season interaction is detectable, but sparse upper-wind cells do not support ranking individual seasons.

4.6.2 Supporting Traffic Models

The annual road-section model and the allocated daily-counter model also show higher rates in strong wind. Their samples and exposure constructions differ from Q1–Q3, so agreement in direction is more informative than their relative magnitudes. Appendix Table A.5 reports the numerical sensitivity checks, including restrictions to official traffic periods and exclusion of recorded zero counter-days.

5 Discussion

5.1 Interpretation

The analyses consistently place the strongest contrasts in the upper wind intervals. Q1 establishes over-representation relative to local weather frequency; Q2 asks whether reduced traffic explains it; Q3 relates accidents to estimated distance travelled on counter-linked roads. Their agreement in direction matters more than agreement in magnitude because they measure different quantities.

Q2 addresses an important limitation of weather-frequency O/E: traffic volume is not constant across weather conditions. At the selected counters, daily traffic is lower during stronger wind. If that response also applies to the broader rural road network, weighting expected accidents by the observed traffic response makes the upper-wind contrast larger rather than explaining it away. The correction remains approximate, however. It extrapolates a 2019–2024 counter relationship to the 2007–2025 primary population, and it uses daily traffic totals rather than traffic observed in the same 10-minute intervals used to classify accidents. Q2 is therefore best interpreted as a sensitivity analysis of the primary O/E rather than as a measured traffic-adjusted accident rate.

Q3 incorporates day-to-day traffic variation directly in the denominator, but its larger rate ratio requires separate interpretation. The sample covers only roads and years with usable counter information, and the upper wind intervals contain few accidents. In addition, pooled vehicle-kilometre rates can be influenced by which road sections contribute exposure to each wind interval. A diagnostic comparison within counter-section–year–season strata gives smaller contrasts than the pooled Q3 rate ratios. This suggests that differences in road and exposure composition account for part of the larger pooled contrasts. It does not establish that particular roads are intrinsically more dangerous, and the sparse upper bins leave substantial uncertainty about the exact magnitude of the contrast.

Monthly-frequency allocation is the preferred main denominator for the available daily traffic totals. Same-day allocation is shown as a sensitivity because it uses realised daily weather. Agreement in the high-wind pattern supports the direction of the association, while differences in magnitude are expected from the different allocations. Neither method observes hourly traffic.

The supporting analyses are consistent with this interpretation but answer different questions. The matched-time comparison retains an upper-wind association after controlling for station and recurring calendar time. This makes an explanation based solely on regular differences between months, weekdays or times of day less plausible. Gust shows a similar upper-tail pattern, although mean wind and gust are related measurements from the same weather observations. Temperature is less consistent: its O/E pattern is non-monotonic and the matched-time analysis does not reproduce the warm-end increase. The severity model

likewise gives no clear evidence that strong wind is associated with a greater probability of serious or fatal injury once an injury accident has occurred. These results support a distinction between the occurrence of accidents and their severity.

The main wind result is consistent with earlier work comparing accident shares with the time spent in adverse weather (Edwards, 1994) and with engineering research showing mechanisms by which crosswind can impair vehicle stability (Baker, 1986, 1994). The contribution here is not a new physical wind threshold, but a long Icelandic accident series linked to local weather frequency and then examined under several complementary exposure constructions. The non-monotonic temperature findings are also consistent with previous evidence that temperature associations can vary by range and season (Lee et al., 2014; Zhan et al., 2020), while the observed reduction in traffic during strong wind agrees with recorder-based evidence that adverse weather changes travel demand (Sathiaraj et al., 2018).

5.2 Strengths

A principal strength is the broad primary sample: rural injury accidents are linked to quality-controlled 10-minute weather observations, and expected counts are standardised within weather station and study season rather than against a single national weather distribution. Match coverage, observed counts and weather-quality exclusions are reported explicitly, which makes the primary O/E calculation transparent and auditable.

The exposure analyses complement rather than replace this broad comparison. Q2 tests how the primary result changes under an empirically estimated traffic response, while Q3 uses observed daily traffic, road length and all eligible counter-days, including days without an accident. The matched-time and additional traffic models provide supporting checks under different conditioning and exposure assumptions. Keeping these analyses separate makes their assumptions visible instead of combining incompatible data sources into one apparently precise measure. Documented transformations, automated tests and stage-specific audits further support reproducibility.

5.3 Limitations

The main limitation is incomplete traffic exposure. Q1 uses weather time rather than vehicle-kilometres. Q2 introduces traffic only through an approximate response estimated from selected counters in 2019–2024 and extrapolated to the broader 2007–2025 population. The counter data are daily totals, so neither Q2 nor Q3 observes how many vehicles were travelling during the specific 10-minute weather interval in which an accident occurred.

Q3 is more exposure-based but also more selective. It is limited to rural counter sections with usable traffic, road geometry and weather in 2019–2024. The full observed daily count is allocated to 07:00–24:00 using pooled station-month weather frequencies, an assumption that preserves daily exposure but does not reconstruct hourly traffic. The monthly weather frequencies use the longer 2007–2025 weather record for stability, while the traffic and accidents themselves are restricted to 2019–2024. Few Q3 accidents occur in the highest mean-wind and gust intervals, so the corresponding large rate ratios should be interpreted

as directional evidence rather than precise estimates. An assigned counter also represents exposure on a road section; it does not establish that the vehicle involved in an accident passed that counter.

Weather measurement introduces a separate source of uncertainty. A station up to 20 km from an accident or counter location is a proxy for conditions on the road, and Icelandic terrain can produce substantial variation over shorter distances. The five-minute matching rule can also select an observation on the adjacent calendar day for accidents close to midnight; this preserves the time tolerance but should be understood as part of the matching definition. The fixed 2020–2024 urban-boundary dataset is applied to the full 2007–2025 accident period, so historical changes in settlement boundaries are not represented.

The supporting models have their own restrictions. The case-crossover design controls recurring calendar time but not unusual traffic, road-surface conditions, visibility or closures on a particular day. The annual traffic model distributes seasonal traffic across wind intervals using weather frequency rather than observed wind-specific traffic. More generally, all analyses are observational. Unmeasured road characteristics, vehicle type, speed, visibility, driver behaviour and weather-related road management may contribute to the observed patterns. The study therefore supports associations and exposure contrasts, not causal effects of wind.

5.4 Future Work

The most valuable extension would be verified hourly traffic linked to stable counter coordinates, road-section identifiers, direction information and counter downtime. Hourly exposure would remove the need to distribute daily traffic totals across weather intervals and would allow accident-time weather to be paired with traffic measured at a compatible temporal resolution. A second useful extension would examine baseline accident rates and exposure composition across road sections to determine how much of the difference between pooled traffic-based rates and locally standardised O/E is attributable to road mix. With sufficiently detailed data, vehicle class, road geometry and wind direction relative to the road could also be incorporated.

6 Conclusion

Strong wind is over-represented at rural injury-accident times in Iceland relative to how often it occurs locally. At mean wind speeds of at least 20 m/s, the primary observed-to-expected ratio is 2.15. Gust shows a similar pattern, while temperature associations are less consistent.

Accounting approximately for reduced traffic strengthens the wind contrast. The separate traffic-based rate analysis points in the same direction, but covers a smaller, more selective road sample and has few accidents in the highest wind intervals. Road and exposure composition appear to explain part of its larger contrast.

These findings support an association, not a causal effect of wind or a direct national estimate of accident risk per distance travelled. Broader counter coverage and hourly traffic measurements are needed to estimate that risk without relying on within-day exposure assumptions.

Bibliography

- Ahmed, M. M., Abdel-Aty, M., and Yu, R. (2012). Assessment of interaction of crash occurrence, mountainous freeway geometry, real-time weather, and traffic data. *Transportation Research Record*, 2280(1), 51–59. <https://doi.org/10.3141/2280-06>.
- Andrey, J., Mills, B., Leahy, M., and Suggett, J. (2003). Weather as a chronic hazard for road transportation in Canadian cities. *Natural Hazards*, 28, 319–343.
- Baker, C. J. (1986). A simplified analysis of various types of wind-induced road vehicle accidents. *Journal of Wind Engineering and Industrial Aerodynamics*, 22(1), 69–85. [https://doi.org/10.1016/0167-6105\(86\)90012-7](https://doi.org/10.1016/0167-6105(86)90012-7).
- Baker, C. J. (1994). The quantification of accident risk for road vehicles in cross winds. *Journal of Wind Engineering and Industrial Aerodynamics*, 52, 93–107. [https://doi.org/10.1016/0167-6105\(94\)90041-8](https://doi.org/10.1016/0167-6105(94)90041-8).
- Edwards, J. B. (1994). Wind-related road accidents in England and Wales 1980–1990. *Journal of Wind Engineering and Industrial Aerodynamics*, 52, 293–303. [https://doi.org/10.1016/0167-6105\(94\)90055-8](https://doi.org/10.1016/0167-6105(94)90055-8).
- Hagstofa Íslands. (2026). Urban-locality geographic data, 2020–2024. <https://gis.is/geoserver/Hagstofan/ows>.
- Hrafnkelsdóttir, E. (2020). *Effects of wind on vehicles: Development of a calculation model* (in Icelandic). Vegagerðin research report 1800-707-2. <https://www.vegagerdin.is/vegagerdin/gagnasafn/skyrslur/utgefnar-rannsoknaskyrslur/umferd/2020-umferd/ahrif-vinds-a-farartaeki-throun-reiknilikans/>.
- Janes, H., Sheppard, L., and Lumley, T. (2005). Case-crossover analyses of air pollution exposure data: Referent selection strategies and their implications for bias. *Epidemiology*, 16(6), 717–726. <https://doi.org/10.1097/01.ede.0000181315.18836.9d>.
- Johansson, Ö., Wanvik, P. O., and Elvik, R. (2009). A new method for assessing the risk of accident associated with darkness. *Accident Analysis & Prevention*, 41(4), 809–815. <https://doi.org/10.1016/j.aap.2009.04.003>.
- Lee, W.-K., Lee, H. A., Hwang, S.-S., Kim, H., Lim, Y.-H., Hong, Y.-C., Ha, E.-H., and Park, H. (2014). A time series study on the effects of cold temperature on road traffic injuries in Seoul, Korea. *Environmental Research*, 132, 290–296. <https://doi.org/10.1016/j.envres.2014.04.019>.
- Lord, D. and Mannering, F. (2010). The statistical analysis of crash-frequency data: a review and assessment of methodological alternatives. *Transportation Research Part A: Policy and Practice*, 44(5), 291–305. <https://doi.org/10.1016/j.tra.2010.02.001>.

- Pu, Y., Chen, F., Chen, P., and Pan, X. (2018). Wind data collection and analysis of topographical features along a highway for traffic safety assessment based on mobile mapping technology. *Transportation Research Record*, 2672(42), 292–301. <https://doi.org/10.1177/0361198118788465>.
- Samgöngustofa. (2026). Traffic accident statistics. <https://www.samgongustofa.is/umferd/tolfraedi/umferdarslys/>.
- Sathiaraj, D., Punkasem, T.-O., Wang, F., and Seedah, D. P. K. (2018). Data-driven analysis on the effects of extreme weather elements on traffic volume in Atlanta, Georgia, USA. *Computers, Environment and Urban Systems*, 72, 212–220. <https://doi.org/10.1016/j.compenvurbsys.2018.06.012>.
- Snæbjörnsson, J. Th., Baker, C. J., and Sigbjörnsson, R. (2007). Probabilistic assessment of road vehicle safety in windy environments. *Journal of Wind Engineering and Industrial Aerodynamics*, 95(9–11), 1445–1462. <https://doi.org/10.1016/j.jweia.2007.02.020>.
- Theofilatos, A., and Yannis, G. (2014). A review of the effect of traffic and weather characteristics on road safety. *Accident Analysis & Prevention*, 72, 244–256. <https://doi.org/10.1016/j.aap.2014.06.017>.
- Veðurstofa Íslands. (2025). Tíðarfar í september 2025. Section: Sumarið (júní til september). Published 2 October 2025. <https://www.vedur.is/um-vi/frettir/tidarfar-i-september-2025>.
- Veðurstofa Íslands. (2026). Weather observations and data services. <https://api.vedur.is/weather/>.
- Vegagerðin. (2026). Traffic statistics. <https://www.vegagerdin.is/samgongukerfid/vegakerfid/umferdartolur>.
- Washington, S., Karlaftis, M., Mannering, F., and Anastasopoulos, P. (2020). *Statistical and Econometric Methods for Transportation Data Analysis*. CRC Press.
- Xing, F., Huang, H., Zhan, Z. Y., Zhai, X., Ou, C., Sze, N. N., and Hon, K. K. (2019). Hourly associations between weather factors and traffic crashes: Non-linear and lag effects. *Analytic Methods in Accident Research*, 24, 100109. <https://doi.org/10.1016/j.amar.2019.100109>.
- Young, R. K., and Liesman, J. (2007). Estimating the relationship between measured wind speed and overturning truck crashes using a binary logit model. *Accident Analysis & Prevention*, 39(3), 574–580. <https://doi.org/10.1016/j.aap.2006.10.002>.
- Zhan, Z.-Y., Yu, Y.-M., Chen, T.-T., Xu, L.-J., and Ou, C.-Q. (2020). Effects of hourly precipitation and temperature on road traffic casualties in Shenzhen, China (2010–2016): A time-stratified case-crossover study. *Science of the Total Environment*, 720, 137482. <https://doi.org/10.1016/j.scitotenv.2020.137482>.

A Supporting Checks

This appendix contains the checks most relevant to interpreting the main results. Additional checks are documented separately.

A.1 Accident Characteristics

Figures A.1 and A.2 complement the hour, season and daylight counts in the data chapter. They describe the selected injury accidents without a traffic-exposure denominator.

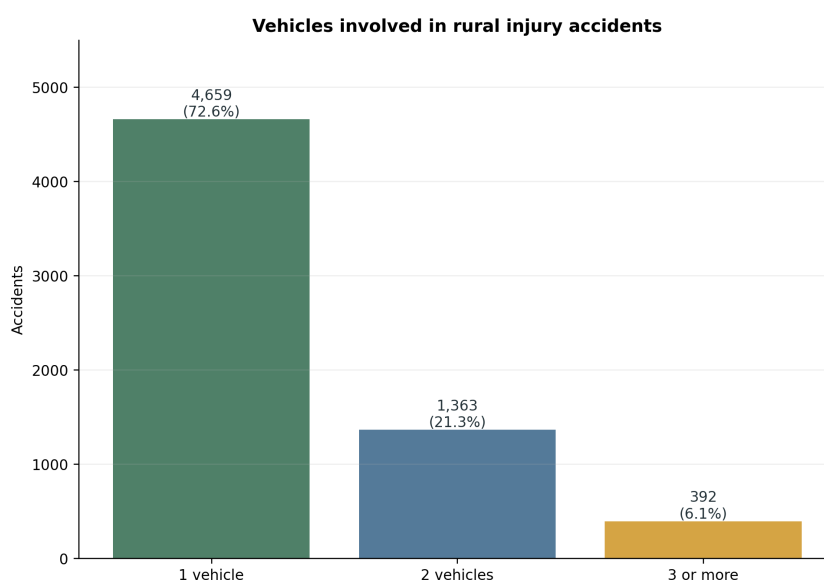


Figure A.1: Number of registered vehicles involved in the 6,414 rural injury accidents. Counts describe the selected sample, not risk by vehicle count.

A.2 Adjusted Severity Model

Table A.1 shows the adjusted comparison of serious or fatal and minor-injury accidents. It describes severity among recorded injury accidents; it does not estimate accident occurrence or risk per vehicle-kilometre.

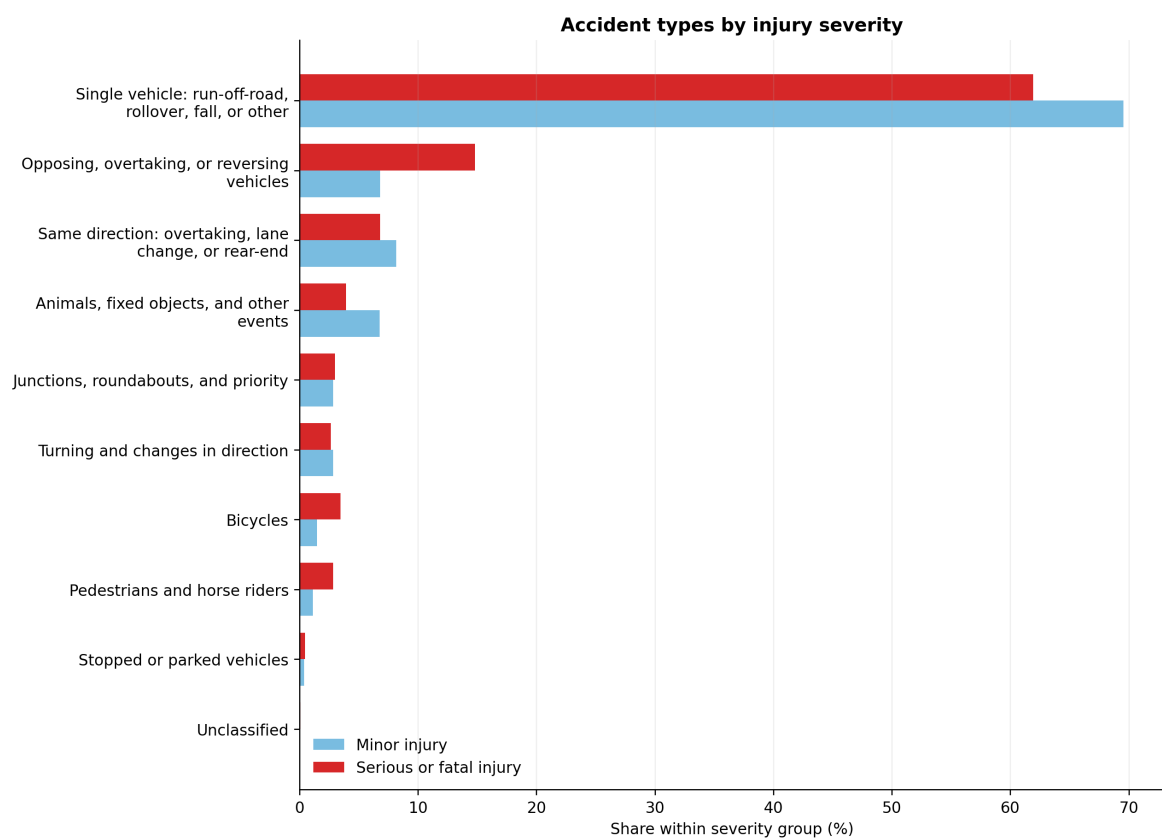


Figure A.2: Accident-type composition for minor injury (blue, code 3) and serious or fatal injury (red, codes 1–2). Percentages sum to 100 within each separate severity group.

Table A.1: Adjusted odds ratios for a serious or fatal outcome among recorded injury accidents. All listed variables are included in the same model.

Variable	Comparison	Adjusted OR (95% CI)
Mean wind	10–15 m/s vs 0–10 m/s	0.99 (0.82–1.21)
Mean wind	≥ 15 m/s vs 0–10 m/s	0.93 (0.69–1.26)
Temperature	< -6 °C vs 0–3 °C	1.13 (0.79–1.62)
Temperature	-6 – -3 °C vs 0–3 °C	0.85 (0.63–1.15)
Temperature	-3 –0 °C vs 0–3 °C	0.83 (0.66–1.04)
Temperature	3–6 °C vs 0–3 °C	1.11 (0.88–1.39)
Temperature	6–9 °C vs 0–3 °C	1.41 (1.10–1.79)
Temperature	9–12 °C vs 0–3 °C	1.28 (0.98–1.68)
Temperature	12–15 °C vs 0–3 °C	1.33 (0.98–1.81)
Temperature	≥ 15 °C vs 0–3 °C	1.21 (0.83–1.76)
Daylight	Darkness vs Daylight	0.89 (0.71–1.12)
Daylight	Civil twilight vs Daylight	1.09 (0.87–1.36)
Time of day	00–06 vs 10–16	0.86 (0.64–1.16)
Time of day	06–10 vs 10–16	0.65 (0.52–0.82)
Time of day	16–20 vs 10–16	0.98 (0.84–1.14)
Time of day	20–24 vs 10–16	0.77 (0.61–0.98)
Season	Winter vs Summer	0.82 (0.64–1.05)
Season	Spring vs Summer	0.96 (0.78–1.18)
Season	Autumn vs Summer	0.83 (0.65–1.05)

A.3 Supporting Allocated Daily-Counter Sample

This section documents the supporting allocated daily-counter model, not the 694-accident Q3 traffic-based rate analysis. The tables show how the 2019–2024 rural injury sample narrows under the linkage used by that supporting model. The 767 records at the last broad selection step include five records that do not enter its final allocated-rate model, which retains 762 accidents.

Table A.2 traces the linkage exclusions for this supporting sample.

Table A.2: Selection of accidents for the supporting allocated daily-counter model.

Selection step	Accidents	Share of 2019–2024 sample
Rural injury accidents in 2019–2024	1,863	100.0%
Exact road-section/year counter candi-date	864	46.4%
Assigned counter within 20 km	863	46.3%
Positive count and valid full-day wind	767	41.2%

Table A.3 compares retained accidents with the broader sample and excluded groups by severity, vehicles and season, making selection differences visible.

Table A.3: Characteristics of accidents retained and excluded by the linkage used for the supporting allocated daily-counter model.

Characteristic	All	No link	Linked, excluded	Retained
Accidents	1,863	999	102	762
Share of all accidents	100.0%	53.6%	5.5%	40.9%
Distinct road sections	563	374	56	189
Serious or fatal	25.6%	29.4%	18.6%	21.5%
One vehicle	67.7%	75.2%	54.9%	59.7%
Winter	32.6%	28.0%	40.2%	37.5%
Spring	13.0%	11.7%	8.8%	15.4%
Summer	36.0%	41.8%	33.3%	28.6%
Autumn	18.4%	18.4%	17.6%	18.5%

The geographic selectivity of this traffic-linked sample is documented in Figure A.3.

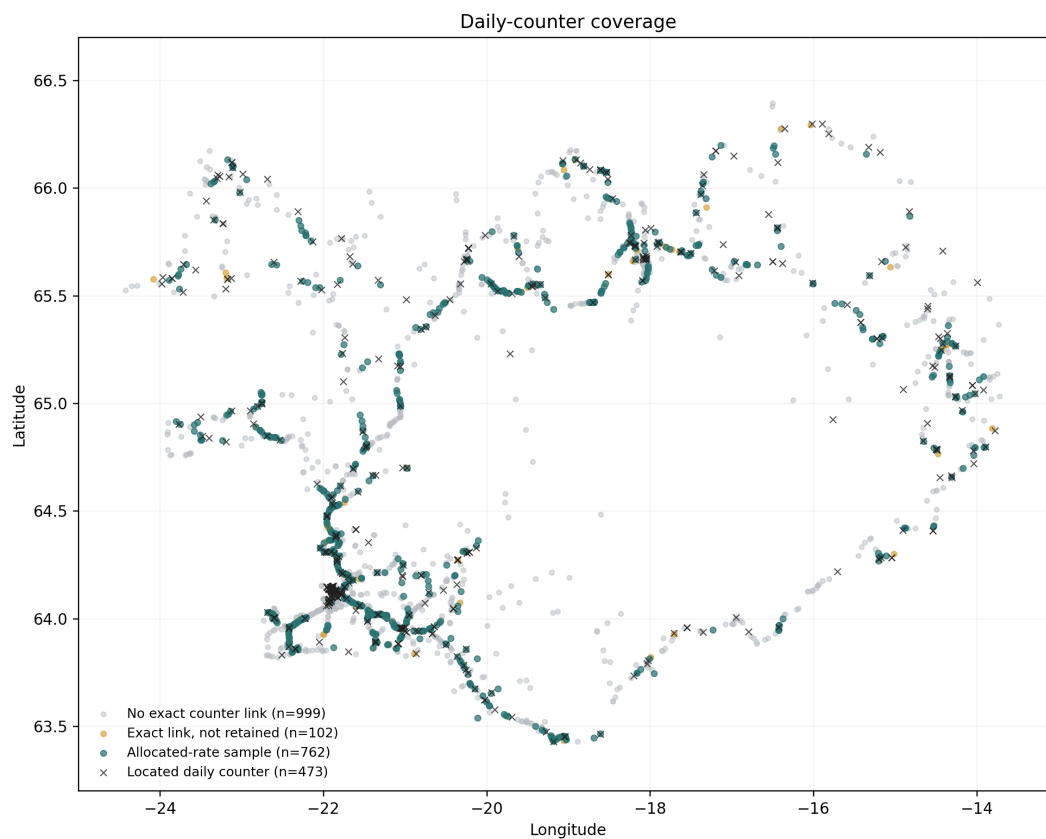


Figure A.3: Geographic coverage of located daily counters and rural injury accidents retained or excluded by the daily-counter linkage, 2019–2024.

A.4 Traffic Sensitivity Checks

Table A.4 shows how the supporting allocated daily-counter result changes under 5, 10, and 20 km limits. It is retained to make the spatial selection rule explicit.

Table A.4: Upper-bin estimate from the supporting allocated daily-counter model under three assignment distances.

Maximum distance	Included accidents	Upper-bin accidents	Rate ratio	95% CI
5 km	585	12	2.91	1.58–5.37
10 km	750	14	2.78	1.58–4.88
20 km	767	14	2.73	1.55–4.78

Table A.5 combines the remaining traffic checks. It compares the annual model using all traffic periods with the version using only official VDU and SDU, reports the effect of excluding zero counter-days, and records exclusions caused by nonpositive VDU or derived spring/autumn daily traffic values.

Table A.5: Sensitivity and quality checks for the supporting traffic analyses.

Check	Data included	Estimate (95% interval)	Records
Rate model, 20–25 m/s	All VDU, SDU, and derived VH DU periods	RR 2.34 (1.72–3.17)	44 accidents
Rate model, 20–25 m/s	Official VDU and SDU periods only	RR 2.03 (1.38–2.96)	28 accidents
Rate model, ≥ 25 m/s	All VDU, SDU, and derived VH DU periods	RR 5.16 (3.15–8.44)	17 accidents
Rate model, ≥ 25 m/s	Official VDU and SDU periods only	RR 2.84 (1.34–6.04)	7 accidents
Daily traffic, 20–25 m/s	Retain zero counter-days	68.94% (62.33–74.09)	1,175 days
Daily traffic, 20–25 m/s	Exclude zero counter-days	69.29% (62.70–74.52)	1,090 days
Nonpositive published VDU	Excluded, not imputed	6.57% excluded	1,509 section-years
Nonpositive derived VH DU	Excluded, not imputed	2.40% excluded	552 section-years