



**UNIVERSITY
OF ICELAND**

Meteorological Conditions and Rural Injury Accidents in Iceland

Analysis of Accident Frequency and Traffic, 2007–2025

Ásgeir Snær Magnússon

September 2026

FACULTY OF INDUSTRIAL ENGINEERING, MECHANICAL ENGINEERING AND COMPUTER SCIENCE

M.Sc. thesis
in Software Engineering

Meteorological Conditions and Rural Injury Accidents in Iceland

Analysis of Accident Frequency and Traffic, 2007–2025

Ásgeir Snær Magnússon

30 ECTS thesis submitted in partial fulfillment of a
Master of Science degree in Software Engineering

Supervisors
Kristján Jónasson
Guðmundur Freyr Úlfarsson

Faculty of Industrial Engineering, Mechanical Engineering and Computer Science
School of Engineering and Natural Sciences
University of Iceland
Reykjavik, September 2026

Meteorological Conditions and Rural Injury Accidents in Iceland
(Meteorological Conditions and Rural Injury Accidents)
Analysis of Accident Frequency and Traffic, 2007–2025

30 ECTS thesis submitted in partial fulfillment of a M.Sc. degree in Software Engineering

Faculty of Industrial Engineering, Mechanical Engineering and Computer Science
School of Engineering and Natural Sciences
University of Iceland
Dunhagi 5
107, Reykjavik, Iceland
Telephone: 525 4000

Bibliographic information:

Ásgeir Snær Magnússon (2026). *Meteorological Conditions and Rural Injury Accidents in Iceland*, M.Sc. thesis, Faculty of Industrial Engineering, Mechanical Engineering and Computer Science, University of Iceland.

Copyright © 2026 Ásgeir Snær Magnússon

This thesis may not be copied in any form without author permission.

Reykjavik, Iceland, September 2026

Abstract

This thesis examines rural injury-accident occurrence in Iceland in relation to mean wind, gust, temperature, season, hour, daylight, and available traffic data. Accident records, cleaned 10-minute weather observations, urban boundaries, annual road-section traffic statistics, and daily counter data are combined in a documented analysis. The main analysis includes 6,192 rural injury accidents from 2007–2025 with valid wind observations within 20 km. Within each weather station and study season, observed accidents in each mean-wind interval are compared with the number expected from the local background frequency of that interval, pooled across 2007–2025. Confidence intervals are obtained from 5,000 bootstrap samples clustered by weather station.

The observed/expected ratio is close to one across most low and moderate wind intervals. At mean wind speeds of 20–25 m/s, 61 accidents were observed compared with 29.0 expected, giving a ratio of 2.11 (95% station-clustered bootstrap interval 1.54–2.73). Gust shows a corresponding upper-tail pattern in the O/E and matched-time analyses. In the matched-time analysis, the odds ratio for mean wind of at least 15 m/s versus 0–5 m/s is 1.61 (95% interval 1.39–1.87), and it changes little when temperature is included. The annual-traffic model also gives an elevated 20–25 m/s rate ratio of 2.38, but its traffic within each wind interval is estimated rather than observed. Temperature is available for 5,707 accidents and has a non-monotonic pattern; the matched daylight estimates are imprecise and close to one. The adjusted severity model gives no clear evidence of greater serious-or-fatal severity in strong wind. The result describes relative accident occurrence, not a causal effect or accident risk per vehicle. Complete hourly traffic is unavailable at the required spatial and temporal resolution for the full study period. The thesis documents data cleaning, matching, coverage and statistical analysis separately.

Ágrip

Í þessari ritgerð eru tengsl veðurs og umferðarslysa með meiðslum í dreifbýli á Íslandi rannsökuð fyrir tímabilið 2007–2025. Megináhersla er lögð á vind, en einnig eru skoðuð vindhviður, hitastig, árstíð, tími dags og birta. Slysagögn eru tengd við tíu mínútna veðurmælingar frá nærliggjandi veðurstöðvum og niðurstöðurnar bornar saman við tíðni sömu veðurskilyrða. Umferðargögn eru síðan notuð til að kanna nánar samband vinds og slysatíðni.

Meginniðurstöðurnar byggja á 6.192 slysum sem hægt var að tengja við gilda vindmælingu í innan við 20 km fjarlægð. Fyrir hverja veðurstöð og árstíð var borinn saman raunverulegur fjöldi slysa við þann fjölda sem búast mætti við miðað við hversu oft vindhraði á hverju bili mældist á viðkomandi stað. Við 20–25 m/s meðalvind urðu 61 slys en búast hefði mátt við 29,0. Hlutfall raunverulegs og vænts fjölda slysa var því 2,11 (95% öryggisbil 1,54–2,73). Niðurstöðurnar benda þannig til þess að slys séu hlutfallslega algengari þegar vindur er mikill en tíðni slíkra vindskilyrða ein og sér myndi gefa til kynna. Greiningar þar sem tekið er tillit til umferðar styðja sömu meginniðurstöðu.

Svipað samband kemur fram fyrir miklar vindhviður, en samband hitastigs og slysatíðni er ekki jafn skýrt. Ekki fundust skýrar vísbendingar um að mikill vindur tengdist herra hlutfalli alvarlegra slysa eða banaslysa meðal þeirra slysa með meiðslum sem þegar höfðu orðið. Niðurstöðurnar sýna tölfræðileg tengsl en sanna ekki að veður valdi slysum. Takmarkanir umferðargagnanna gera jafnframt að verkum að ekki er hægt að reikna nákvæma áhættu á hvert ökutæki fyrir allt rannsóknartímabilið.

Contents

Abstract	v
Ágrip	vi
Abbreviations	xv
1 Introduction	1
1.1 General	1
1.2 Aim and Research Questions	1
1.3 Thesis Outline	2
2 Background	3
2.1 Wind and Rural Road Accidents	3
2.2 Temperature, Daylight, and Time of Day	3
2.3 Traffic and Accident Rates	4
3 Data and Methods	5
3.1 Data	5
3.1.1 Source Data	5
3.1.2 Accident Data	6
3.1.3 Weather Data	11
3.1.4 Traffic Data	12
3.2 Data Preparation and Reproducibility	13
3.3 Analysis	14
3.3.1 Weather-Frequency Comparison	14
3.3.2 Matched-Time Comparison	15
3.3.3 Use of Traffic Data	16
3.3.4 Road-Section Traffic Comparison	16
3.3.5 Daily Traffic Comparison	17
4 Results	21
4.1 Study Sample and Coverage	21
4.2 Mean Wind	22
4.3 Wind Gust and Temperature	23
4.3.1 Wind Gust	23
4.3.2 Temperature	24
4.4 Matched-Time Results	25
4.5 Daylight, Season, and Severity	26
4.6 Traffic Results	28

5	Discussion	33
5.1	Interpretation	33
5.2	Strengths	34
5.3	Limitations	34
5.4	Further Work	35
6	Conclusion	37
A	Supporting Analyses	41
A.1	Accident Characteristics	41
A.2	Wind Gust Distance Check	41
A.3	Mean-Wind Subgroups	43
A.4	Raw Condition Counts, Temperature by Season, and Adjusted Severity . . .	43
A.5	Daily-Counter Validation	43
A.6	Full-Day-Mean Daily-Counter Check	46
A.7	Stratified Vehicle-Kilometre Model	51

List of Figures

3.1	Available accident records, severity of the rural injury sample, and coverage of the main weather match. Damage-only accidents remain available but are not part of the injury outcome.	10
3.2	Locations of the 6,414 rural injury accidents. The 300 accidents matched to mean wind of at least 15 m/s are highlighted. The coordinates show the spatial coverage of the study; the figure is not a regional rate map.	10
3.3	Accident-type distribution among the 6,414 rural injury accidents.	11
3.4	Weather observations retained after the documented wind-quality rules.	12
3.5	Coverage of the annual road-section data, the road-section wind table, and the separate daily-counter comparison.	14
4.1	Annual rural injury-accident counts and the percentage matched to wind or temperature within 20 km and five minutes. No missing temperature value is imputed.	22
4.2	Wind-frequency-adjusted relative occurrence of rural injury accidents by mean wind speed. The label inside each bar is the observed accident count. Traffic volume is not included. Bootstrap intervals are given in the text rather than drawn on the figure.	23
4.3	Frequency-adjusted observed/expected accident occurrence by wind gust in the ten-minute observation matched to the accident time. Labels show observed accidents; the measure is not a daily maximum.	24
4.4	Temperature O/E estimates standardised by independently matched temperature station and study season. Labels show observed accident counts. The non-monotonic pattern is interpreted cautiously.	25
4.5	Matched-time odds ratios from the model containing mean wind and temperature together. Each accident is compared with the same location, month, weekday, and clock time. Error bars are 95% confidence intervals.	26
4.6	Odds ratios for daylight at accident dates compared with dates at the same location, month, weekday, and clock time. Only 985 strata change daylight class within the matched dates. Error bars are 95% confidence intervals.	27
4.7	Adjusted odds of serious-or-fatal rather than minor injury by time of day, daylight, and season among 5,707 accidents with complete weather matches. The model also includes the wind and temperature categories shown in the full appendix figure. Error bars are 95% confidence intervals. These are severity comparisons conditional on a recorded injury accident, not accident-occurrence rates.	27
4.8	Season-specific matched-time odds ratios for mean wind of at least 15 m/s relative to 0–10 m/s. The estimates come from one interaction model; error bars are 95% confidence intervals. The omnibus wind-by-season test gives $p = 0.072$, so differences between individual estimates are not treated as established seasonal effects.	28

4.9	Estimated rural injury-accident rate ratios relative to 0–5 m/s. The model compares wind intervals within the same road section, year, and traffic period. Traffic is allocated within a period in proportion to local 10-minute wind frequency. Labels show observed accidents and error bars are 95% confidence intervals.	29
4.10	Estimated rural injury-accident rate ratios by temperature relative to 0–3°C. Comparisons are within road section, year, and traffic period. Vehicle-kilometres are allocated according to temperature frequency at the same road-assigned weather station used for the accident temperature. Labels show accidents and error bars are 95% confidence intervals.	29
4.11	Estimated rural injury-accident rate ratios by season. Traffic and weather frequency are aligned by road section, year, and season. Coarse wind intervals avoid unstable one-event upper bins; labels show observed accidents and error bars are 95% confidence intervals.	30
4.12	Observed daily traffic by duration of strong wind. Values are relative to the mean for the same counter, year, month, and weekday. Error bars are counter-clustered 95% confidence intervals; labels show counter-days. . .	31
4.13	Daily-counter rural injury-accident rate ratios by accident-time mean wind. Observed 24-hour traffic is allocated within each day in proportion to the counter station’s ten-minute wind frequency, and accidents use that same station. Comparisons are within counter and year; labels show accidents and error bars are 95% confidence intervals.	32
A.1	Number of registered vehicles involved in the 6,414 rural injury accidents. Most selected accidents involved one registered vehicle.	41
A.2	Accident-type composition in minor-injury accidents and in the non-overlapping fatal-or-serious group. Percentages sum to 100 within each severity group.	42
A.3	Estimated serious-or-fatal accident rate ratios by season using coarse mean-wind intervals. The spring upper category contains six accidents, so the estimates show direction and uncertainty rather than precise differences between seasons.	43
A.4	Mean-wind O/E estimates by study season. These estimates are shown as a descriptive subgroup analysis; high-wind bins are sparse after the sample is divided by season. All panels share one vertical scale; grey bars contain fewer than 20 accidents.	44
A.5	Mean-wind O/E estimates by the number of registered vehicles involved. This is a descriptive subgroup analysis; it does not establish accident type or vehicle count as an explanatory variable. Both panels share one vertical scale; grey bars contain fewer than 20 accidents.	44
A.6	Mean-wind O/E estimates for single-vehicle run-off-road, rollover, fall, or other events and for all other accident types. At least 20 m/s, the combined O/E is 2.37 for the single-vehicle family and 1.75 for other types. The figure is descriptive and is not a formal test of interaction.	45

A.7	Raw counts of rural injury accidents by recorded hour, season, estimated daylight, and matched temperature, divided into minor-injury and serious-or-fatal accidents. Labels give total accidents. Hour, season, and daylight use all 6,414 accidents; temperature uses the 5,707 qualifying matches. These panels describe the sample and do not estimate risk.	45
A.8	Temperature O/E by season using three broad intervals formed by summing the fixed temperature bins. The changing direction between seasons shows why the pooled temperature result should be interpreted cautiously. Labels are observed accidents.	46
A.9	Adjusted odds of serious-or-fatal rather than minor injury among 5,707 recorded injury accidents with complete wind and temperature matches. The model contains all displayed variables together. It describes severity conditional on an accident and does not estimate accident occurrence. . .	47
A.10	Vehicles counted per day relative to a typical day at the same counter, year, month, and weekday. Labels show counter-days. Daytime mean wind is calculated from 10:00 to 21:59. The figure describes selected counter sites, not traffic across the national road network.	48
A.11	Daily traffic relative to its calendar expectation by traffic period and daytime mean wind. The decline is present in VDU, SDU, and VH DU, although the highest interval contains only 136, 16, and 29 counter-days respectively. Grey bars contain fewer than 20 counters.	49
A.12	Locations of the 1,863 rural injury accidents in 2019–2024 and the 473 located daily counters. Colours distinguish the 758 accidents included in the allocated-rate model, the 106 with an exact link but another exclusion, and the 999 without an exact same-year counter link. The map displays the geographic selectivity of the daily-counter sample; it is not a road-network rate map.	50
A.13	Estimated mean-wind rate ratios from separate one-vehicle and multiple-vehicle models. The upper category contains 150 and 97 accidents, respectively, in the upper category. Comparisons are within road section, year, and traffic period; error bars are 95% confidence intervals.	52
A.14	Estimated serious-or-fatal rural accident rate ratios by mean wind. The model compares wind intervals within the same road section, year, and traffic period. Labels show observed accidents. The four accidents in the highest interval make that estimate imprecise.	52

List of Tables

3.1	Downloaded source data. The study period is 2007–2025.	5
3.2	First chronological records in the canonical rural injury-accident analysis file	6
3.5	Definitions used throughout the thesis	6
3.3	Exact inputs and outputs of the data-preparation pipeline	7
3.4	Exact inputs and outputs of the ordinary analysis pipeline	8
3.4	Exact inputs and outputs of the ordinary analysis pipeline (continued)	8
3.4	Exact inputs and outputs of the ordinary analysis pipeline (continued)	9
3.4	Exact inputs and outputs of the ordinary analysis pipeline (continued)	9
3.6	Quality of the primary accident–weather matches (20 km and five minutes). Distances are median / P90; time differences are median / maximum.	12
3.7	Wind-quality audit of all delivered station-time rows, 2007–2025	12
3.8	Traffic periods used in the annual-traffic analysis.	13
4.1	Coverage of the retained analyses	21
4.2	Primary mean-wind O/E under three weather-station distance limits	23
4.3	Selected pooled and year-adjusted O/E estimates	25
4.4	Summary of the evidence used to interpret the main result	31
A.1	Highest-gust result under three weather-station distance limits	41
A.2	Counter-location construction and independent coordinate check	43
A.3	Consistency of observed daily PDF traffic with official ADU	46
A.4	Selection of accidents for the observed daily-counter analysis	46
A.5	Characteristics of accidents retained and excluded by the daily-counter linkage	48
A.6	Reasons an exact same-year daily-counter link was unavailable	48
A.7	Detailed daily counter-based rural injury-accident rate comparison, 2019– 2024	51
A.8	Upper daily-counter estimate under three assignment distances	51
A.9	Estimated rural injury-accident rate by mean wind speed, all traffic periods	53
A.10	Conditional rate ratios in the upper mean-wind intervals: all periods versus official VDU and SDU periods only	53
A.11	Comparison and quality checks for the traffic analyses	53
A.12	Illustrative direction check using observed daily traffic response	53

Abbreviations

ADU	Average annual daily traffic.
SDU	Summer daily traffic, June–September.
VDU	Winter daily traffic, December–March.
VHDU	Spring/autumn daily traffic derived from ADU, SDU and VDU.
O/E	Observed accidents divided by expected accidents.

1 Introduction

1.1 General

Weather affects both driving conditions and the decision to travel. Strong wind can make a vehicle harder to control, low temperature can coincide with slippery roads, and darkness can reduce visibility. These conditions are important in Iceland, where weather varies greatly across locations and over short periods.

This thesis studies rural accidents involving injury in Iceland from 2007–2025. Accident times and locations are linked to nearby ten-minute weather observations. The main comparison concerns mean wind speed. Wind gust, temperature, season, time of day, daylight, and the available traffic data are then examined separately.

Accident counts alone are not accident risk. Severe weather can increase the hazard faced by each vehicle while reducing the number of vehicles on the road. Weather frequency and traffic volume are therefore considered separately Andrey et al. (2003); Lord and Mannering (2010); Washington et al. (2020).

1.2 Aim and Research Questions

The aim is to quantify how the occurrence of rural injury accidents varies with weather and to determine what the available traffic data add to the main wind result. Five questions guide the analysis:

1. How many rural injury accidents occur in each mean-wind interval relative to the number expected from the local frequency of that wind?
2. What corresponding numerical associations are found for wind gust and temperature?
3. What matched-time association is found for daylight, and does the strong-wind association differ by season?
4. Among recorded injury accidents, how are weather, daylight, season, and time of day related to serious-or-fatal rather than minor injury?
5. What wind-related rate ratios are obtained from the available annual and daily traffic data, and how does daily traffic change when strong wind lasts for several hours?

The first question is the main question. It is answered with observed-to-expected (O/E) ratios and uncertainty intervals based on resampling weather stations. The remaining questions extend and check that result. The study estimates relative accident occurrence, not a causal effect or a complete national accident rate per vehicle-kilometre.

1.3 Thesis Outline

Chapter 2 gives the background for the weather and traffic comparisons. Chapter 3 describes the data, preparation pipeline, and statistical methods. Chapter 4 presents the results, beginning with mean wind. Chapter 5 discusses their interpretation and limitations, and Chapter 6 gives the conclusions. Additional figures and detailed checks are given in the appendix.

2 Background

2.1 Wind and Rural Road Accidents

Crosswind can produce overturning, lateral sideslip, or excessive yaw. The critical condition depends on vehicle geometry and mass, vehicle speed, road friction, wind direction, and driver response rather than wind speed alone Baker (1986, 1994). High-sided vehicles are particularly exposed, but the physical mechanisms also provide a reason to examine loss-of-control accidents more generally. These engineering studies establish physical plausibility and vehicle-specific failure mechanisms; they do not by themselves establish a population-level association between wind and accident occurrence.

This problem is directly relevant in Iceland, where terrain can accelerate and redirect near-surface wind over short distances. An Icelandic reliability study modelled accident probability as the combined outcome of wind velocity and direction, road camber and friction, and vehicle speed Snæbjörnsson et al. (2007). That work explains why a weather station is an imperfect proxy for conditions at a specific road location and why results should be compared under several distance limits. Mobile road- measurement research similarly shows that roadside terrain creates marked spatial variation that a sparse fixed-station network cannot fully resolve Pu et al. (2018).

Vegagerðin has developed a vehicle-wind model to support decisions about hazardous conditions and road closures, while also noting the limited experimental evidence available for passenger cars Hrafnkelsdóttir (2020). The present thesis does not test that operational model; it examines population-level accident occurrence using a separate data design.

Empirical work has compared the share of accidents occurring in high wind with the share of time that high wind was observed, an approach closely related to the observed/expected comparison used here Edwards (1994). Studies linking crashes to nearby weather stations likewise show that station observations can be informative while retaining measurement error Young and Liesman (2007). More broadly, reviews find that road-safety evidence for wind is less consistent than for precipitation Theofilatos and Yannis (2014).

2.2 Temperature, Daylight, and Time of Day

Temperature, daylight, and time of day add context that wind alone cannot provide. They affect road-surface conditions, visibility, travel patterns, and the composition of road users, but accident counts in these categories are not rates unless the corresponding amount of travel is known. Temperature effects can also be non-linear and season-specific: a Seoul time-series study found its strongest cold-weather association below freezing in winter, while an hourly case-crossover study in Shenzhen found a J-shaped temperature relationship Lee et al. (2014);

Zhan et al. (2020). Temperature is therefore compared with its local seasonal frequency rather than treated as having one linear effect.

Darkness presents the same denominator problem. A method developed using Norwegian, Swedish, and Dutch data compared daylight and darkness within clock time and season, avoiding the interpretation of raw night-time counts as risk Johansson et al. (2009). Here, raw hour, season, and daylight counts describe the sample. Matched daylight and adjusted severity models are used for numerical comparisons.

2.3 Traffic and Accident Rates

Weather can change the amount of traffic as well as the hazard. Research using automatic traffic recorders shows that extreme weather variables, including wind, can reduce or redistribute hourly traffic volume Sathiaraj et al. (2018). Accident counts during strong wind can remain low even if risk to each travelling vehicle increases. High-resolution crash studies show the value of hourly weather and matched-time analyses rather than daily or monthly averages Xing et al. (2019). This thesis reports three distinct quantities: accident occurrence relative to weather frequency, rates based on estimated vehicle-kilometres, and changes in observed daily traffic. Studies with real-time traffic, weather, and road geometry show what a more complete analysis could achieve when such data are available Ahmed et al. (2012).

3 Data and Methods

3.1 Data

3.1.1 Source Data

Table 3.1 lists the downloaded source data. The identifiers in the first column are used in Table 3.3. The source documentation is cited in the bibliography Samgöngustofa (2026); Veðurstofa Íslands (2026); Vegagerðin (2026); Hagstofa Íslands (2026).

Table 3.1: Downloaded source data. The study period is 2007–2025.

ID	Source website	Downloaded data	Records and period
ACC	Samgöngustofa	Accident events and road links	126,607 events and 126,610 road links, 2007–2025
IMO	Icelandic Meteorological Office	Ten-minute weather observations and station metadata	226,580,952 observations and 771 station-history records, 2007–2025
VGD-A, VGD-D, VGD-R	Vegagerðin	Annual road traffic, daily counter reports, counter locations, and road geometry	33,757 section-years, 2000–2025; 1,033,659 counter channel-days, 2019–2024
SI	Statistics Iceland	Urban-area polygons	97 polygons, 2020–2024 publication

The 2025 accident, injury, vehicle, road-link, annual-traffic, and weather records pass through the same preparation rules as the earlier years and are included in the analysis. Daily counter reports currently end in 2024.

Table 3.2 shows the first chronological records in the canonical rural injury-accident file. The source identifier is named `nid` or `NID` in the supplied files and is renamed `id` at import. Its values are source record keys, not row numbers, so chronological records are not expected to be numbered 1, 2, 3, and so forth. They are kept unchanged because they link the accident, road-link, and vehicle files. The original injury and accident-type codes are also kept. The table is generated from `data/analysis/accidents.csv`; it is not typed into the thesis.

Table 3.2: First chronological records in the canonical rural injury-accident analysis file

id	Date	Time	Lat.	Lon.	meidsli	tegohapps	Road section
3167342	2007-01-02	11:18	64.0523	-21.5325	3	12	000-102
3167947	2007-01-03	03:30	64.9063	-13.9619	3	12	96-07
3167977	2007-01-03	13:00	65.9231	-23.4399	3	12	60-44
3168112	2007-01-03	18:04	65.5153	-18.6033	3	240	1-p1
3168111	2007-01-03	18:08	64.5771	-21.8793	3	12	1-g8
3168229	2007-01-03	23:37	64.0538	-21.4916	3	11	1-d9
3168293	2007-01-04	02:22	64.0233	-22.6323	3	11	429-02
3168875	2007-01-05	06:24	64.3115	-20.2533	3	910	35-08
3168970	2007-01-05	10:41	64.7480	-14.4489	3	12	1-u5
3169241	2007-01-05	17:23	64.0188	-21.3859	3	240	1-d8

Table 3.3 records the exact file transformations used to create the analysis data. Dataset contents and purposes have already been defined in Table 3.1 and the preceding text. To keep the table compact, script paths are relative to `src/` and data paths are relative to `data/`. Collections of unchanged annual workbooks and daily reports are shown with a file pattern. Within a cell, each shared directory is printed once and the following filenames belong to that directory.

Ordinary analysis begins only after the compact CSV layer has been exported. Table 3.4 lists the analysis-to-result steps; none reads from `raw/` or `processed/`. Input paths beginning with `analysis/` are relative to `data/`; result paths are relative to `reports/`.

Table 3.5: Definitions used throughout the thesis

Term	Definition	Use in this thesis
f	Ten-minute mean wind speed, m/s	Main weather measure, matched within five minutes of the accident time.
f g	Wind gust reported in the same ten-minute observation, m/s	Additional weather measure; not a daily maximum.
t	Ten-minute air temperature, °C	Additional weather measure matched independently.
O/E	Observed accidents divided by accidents expected from local weather frequency	Main relative-occurrence result; traffic is not included.
ADU	Average vehicles per day over the year	Used to check and derive annual traffic quantities.
SDU	Average vehicles per day in June–September	Official summer traffic value.
VDU	Average vehicles per day in December–March	Official winter traffic value.
VHDU	Average vehicles per day in April–May and October–November	Derived from ADU after SDU and VDU totals are removed.

3.1.2 Accident Data

The accident source covers 2007–2025 Samgöngustofa (2026). The study population comprises 6,414 rural accidents involving injury. Accident severity is based on the source field

Table 3.3: Exact inputs and outputs of the data-preparation pipeline

Script	Input file(s)	Output file(s)	Description
accidents/build.py	raw/accidents/ accidents_*.txt vehicles_*.txt road_links_2007_2025.txt urban_boundaries_2020_2024.geojson	processed/accidents/ all.csv	Joins accident, vehicle, road-link, and boundary data.
weather/clean.py	raw/weather/ weather_10min_raw.parquet	processed/weather/ weather.parquet cleaning.csv	Applies the fixed weather-quality rules and records annual counts.
weather/frequency.py	processed/weather/ weather.parquet	processed/weather/ frequency.csv yearly_frequency.csv traffic_frequency.csv	Counts pooled and yearly local weather frequency for O/E and traffic models.
traffic/annual.py	raw/traffic/annual/ *.xls*	processed/traffic/ annual.csv	Standardises road section, length, ADU, SDU and VDU.
accidents/match_weather.py	processed/accidents/ all.csv processed/weather/ weather.parquet raw/weather/ stations.csv	processed/accidents/ rural_injury.csv	Matches wind and temperature; retains 10, 20, and 30 km results.
accidents/case_control.py	processed/accidents/ rural_injury.csv processed/weather/ weather.parquet	processed/accidents/ case_control.csv	Selects matched non-accident weather times.
traffic/build_road_period.py	processed/traffic/ annual.csv processed/accidents/ rural_injury.csv processed/weather/ weather.parquet raw/weather/ stations.csv raw/traffic/reference/ road_section_midpoints.csv, road_sections.parquet	processed/ weather/road_period_frequency.csv traffic/road_period.csv	Builds road-period mean-wind and traffic rows.
traffic/rate_weather.py	processed/ traffic/road_period.csv accidents/rural_injury.csv weather/weather.parquet raw/weather/ stations.csv	processed/accidents/ rate.csv	Aligns accident wind and temperature with the road-exposure station.
traffic/daily.py	raw/traffic/daily_pdf/ *.pdf	processed/traffic/ daily_raw.csv	Parses one daily count per counter channel and date.
traffic/download_roads.py	VGD-R MapServer layer 6	raw/traffic/reference/ roads.geojson	Downloads the unchanged public road reference.
traffic/locate_counters.py	processed/traffic/ daily_raw.csv raw/traffic/reference/ roads.geojson	processed/traffic/ daily.csv	Combines directional channels and locates counters.
traffic/daily_weather.py	processed/ traffic/daily.csv weather/weather.parquet raw/weather/ stations.csv	processed/traffic/ daily_match.parquet daily_weather.csv	Matches counter-days to a nearby weather station.
traffic/accident_wind.py	processed/ accidents/rural_injury.csv traffic/daily_weather.csv traffic/locations.csv weather/weather.parquet raw/weather/ stations.csv	processed/traffic/ accident_wind.csv	Matches accidents to the assigned counter-day station.
export_tables.py	processed/ accidents/rural_injury.csv accidents/rate.csv accidents/case_control.csv weather/frequency.csv weather/yearly_frequency.csv weather/traffic_frequency.csv weather/cleaning.csv traffic/annual.csv traffic/road_period.csv traffic/daily_weather.csv traffic/accident_wind.csv traffic/locations.csv	analysis/ analysis CSV files listed below	Selects only the variables used by ordinary analysis.

Table 3.4: Exact inputs and outputs of the ordinary analysis pipeline

Script	Input file(s)	Output file(s)	Description
tables/pipeline.py	docs/pipeline.md	reports/thesis/ pipeline_prepare.tex pipeline_analysis.tex	Generates the thesis pipeline tables.
analysis/oe.py	analysis/accidents.csv analysis/accident_conditions.csv analysis/weather_frequency.csv	reports/working/tables/oe_station_bins.csv	Builds station-season observed and expected accident totals.
tables/oe.py	reports/working/tables/oe_station_bins.csv analysis/accidents.csv analysis/accident_conditions.csv	reports/main/tables/oe_results.csv mean_wind_oe.csv gust_oe.csv temperature_oe.csv wind_coverage.csv	Calculates O/E results and uncertainty intervals.
tables/year_oe.py	analysis/accidents.csv analysis/accident_conditions.csv analysis/weather_yearly.csv	reports/main/tables/year_oe.csv	Repeats mean-wind and temperature O/E within station, season, and year.
tables/wind_radius.py	reports/main/tables/oe_results.csv	reports/main/tables/wind_radius.csv	Selects upper-wind results for three distance limits.
figures/oe.py	reports/main/tables/oe_results.csv	reports/main/figures/ mean_wind_oe.png gust_oe.png temperature_oe.png wind_season_oe.png wind_vehicle.png wind_type.png temperature_season.png	Draws the primary, supporting, and descriptive subgroup O/E figures.
tables/annual_quality.py	analysis/annual_traffic.csv	reports/main/tables/annual_quality.csv	Audits nonpositive and unusual published seasonal traffic values.
tables/estimated_rate.py	analysis/road_exposure.csv	reports/main/tables/absolute_rate.csv	Calculates the descriptive accident rate from all eligible road sections.
tables/rate.py	analysis/road_rate.csv	reports/main/tables/ wind_rate.csv wind_rate_severity.csv wind_rate_one.csv wind_rate_multiple.csv reports/working/tables/ wind_rate_official.csv	Fits the annual-traffic wind-rate models.
figures/rate.py	Main, serious/fatal and official-period wind-rate tables	reports/main/figures/ wind_rate.png wind_rate_severity.png reports/working/figures/ wind_rate_official.png	Draws the principal annual-traffic rate ratios.
tables/temp_rate.py	analysis/road_temperature.csv	reports/main/tables/temperature_rate.csv	Fits the same-station temperature and estimated-traffic model.
figures/temp_rate.py	reports/main/tables/temperature_rate.csv	reports/main/figures/temperature_rate.png	Draws the traffic-adjusted temperature rate ratios.

Table 3.4: Exact inputs and outputs of the ordinary analysis pipeline (continued)

Script	Input file(s)	Output file(s)	Description
figures/vehicle_rate.py	reports/main/tables/ wind_rate_one.csv wind_rate_multiple.csv	reports/main/figures/wind_rate_vehicle.png	Compares coarse wind-rate estimates by number of vehicles.
tables/season_rate.py	analysis/road_seasons.csv	reports/main/tables/ season_rate.csv season_rate_severity.csv	Fits injury and serious-or-fatal models for four seasons.
figures/season_rate.py	The two tables written by tables/season_rate.py	reports/main/figures/ season_rate.png season_rate_severity.png	Draws the season-specific rate-ratio panels.
tables/daily_traffic.py	analysis/daily_traffic.csv	reports/main/tables/traffic_wind.csv traffic_period.csv	Calculates traffic relative to the typical day at the same counter.
tables/wind_duration.py	analysis/daily_traffic.csv	reports/main/tables/wind_duration.csv	Compares traffic with the calendar expectation by hours with $f \geq 15$ m/s.
figures/wind_duration.py	reports/main/tables/wind_duration.csv	reports/main/figures/wind_duration.png	Draws the sustained-wind traffic comparison.
tables/allocated_rate.py	analysis/ accidents.csv counter_wind.csv daily_traffic.csv	reports/main/tables/ allocated_rate.csv allocated_rate_severity.csv allocated_rate_day.csv	Fits same-station accident-time daily-counter models.
tables/daily_sample.py	analysis/ accidents.csv counter_wind.csv daily_traffic.csv counter_locations.csv	reports/main/tables/ daily_sample.csv daily_exclusions.csv daily_map.csv	Compares accidents retained and excluded by the daily-counter linkage.
figures/counter_map.py	reports/main/tables/daily_map.csv	reports/main/figures/counter_coverage.png	Maps located counters and accidents retained or excluded by counter coverage.
figures/allocated_rate.py	reports/main/tables/allocated_rate.csv	reports/main/figures/allocated_rate.png	Draws the retained daily-counter injury-accident rate ratios.
tables/counter_rate.py	analysis/ accidents.csv daily_traffic.csv counter_locations.csv	reports/main/tables/day_rate.csv day_rate_coarse.csv	Fits the detailed and coarse full-day observed-traffic comparisons within counter and year.
tables/counter_radius.py	analysis/ accidents.csv daily_traffic.csv counter_locations.csv	reports/main/tables/counter_radius.csv	Repeats both non-reference coarse estimates at 5, 10 and 20 km.

Table 3.4: Exact inputs and outputs of the ordinary analysis pipeline (continued)

Script	Input file(s)	Output file(s)	Description
figures/counter_rate.py	reports/main/tables/day_rate_coarse.csv	reports/main/figures/day_rate.png	Draws the coarse observed-traffic comparison with 95% intervals.
tables/traffic_checks.py	Main and official-period rate tables analysis/daily_traffic.csv reports/main/tables/annual_quality.csv	reports/main/tables/traffic_checks.csv	Combines the retained traffic-data checks.
tables/allocation_check.py	reports/main/tables/ wind_rate.csv traffic_wind.csv	reports/main/tables/allocation_check.csv	Shows the direction implied by applying observed daily traffic patterns to the annual-model denominator; it is not a corrected estimate.
figures/daily_traffic.py	reports/main/tables/traffic_wind.csv	reports/main/figures/ traffic_wind.png traffic_wind_period.png	Draws pooled and traffic-period daily-traffic results.
figures/data_flow.py	analysis/selection_summary.csv reports/main/tables/weather_audit.csv	reports/main/figures/ accident_flow.png weather_flow.png traffic_flow.png	Draws the three selection figures.
figures/accident_profiles.py	analysis/accidents.csv	reports/main/figures/ accident_types.png vehicles_per_accident.png accident_types_by_severity.png	Draws accident-type, vehicle-count and severity descriptions.
figures/accident_map.py	analysis/accidents.csv accident_conditions.csv	reports/main/figures/accident_map.png	Maps the study population and strong-wind accidents.
tables/annual_coverage.py	analysis/accidents.csv accident_conditions.csv	reports/main/tables/weather_coverage.csv	Summarises annual weather-match coverage.
tables/match_quality.py	analysis/accidents.csv accident_conditions.csv	reports/main/tables/match_quality.csv	Reports wind and temperature match counts, stations, distances and time differences.
figures/annual_coverage.py	reports/main/tables/weather_coverage.csv	reports/main/figures/weather_coverage.png	Draws annual counts and match coverage.
tables/conditions.py	analysis/accidents.csv analysis/accident_conditions.csv	reports/main/tables/conditions.csv temperature_coverage.csv	Summarises hour, traffic period, daylight and temperature.
figures/conditions.py	reports/main/tables/conditions.csv	reports/main/figures/conditions.png	Draws the consolidated raw-count description of accident conditions.

Table 3.4: Exact inputs and outputs of the ordinary analysis pipeline (continued)

Script	Input file(s)	Output file(s)	Description
tables/case_control.py	analysis/case_control.csv	reports/main/tables/matched_weather.csv	Fits continuous and categorical conditional logistic models.
tables/wind_season.py	analysis/case_control.csv	reports/main/tables/wind_season.csv	Tests whether the matched mean-wind association differs by season.
tables/weather_model.py	analysis/case_control.csv	reports/main/tables/weather_model.csv	Fits mean wind and temperature together at matched times.
figures/estimates.py	reports/main/tables/ wind_season.csv weather_model.csv severity_conditions.csv daylight.csv	reports/main/figures/ wind_season.png weather_model.png severity_conditions.png severity_context.png daylight.png	Draws the complete and focused model-estimate figures.
tables/severity.py	analysis/accidents.csv accident_conditions.csv	reports/main/tables/severity_conditions.csv	Models serious-or-fatal severity among recorded accidents.
tables/daylight.py	analysis/accidents.csv	reports/main/tables/daylight.csv	Compares daylight at accident dates with dates at the same location, month, weekday and clock time.
tables/wind_profile.py	analysis/accidents.csv analysis/accident_conditions.csv	reports/main/tables/wind_profile.csv	Describes accidents at mean wind at least 15 m/s.
tables/daily_adu.py	analysis/daily_traffic.csv counter_locations.csv annual_traffic.csv	reports/main/tables/counter_adu.csv	Checks daily counter totals against published ADU.
validate.py	Analysis CSVs and retained result tables	reports/main/tables/validation.md	Checks row counts, included records, and headline results.
tables/thesis.py	Retained CSV result tables and documented audit tables	reports/thesis/generated/*.tex	Generates the numerical thesis tables.

meidsli: code 1 denotes a fatal accident, code 2 a serious accident, code 3 a minor-injury accident, and code 4 an accident without injury. The main outcome is $\text{meidsli} \leq 3$. The serious-or-fatal comparison uses $\text{meidsli} \leq 2$. The source data also contain 17,591 rural damage-only accidents; these are outside the injury outcome.

Rural status is derived from accident coordinates and Statistics Iceland urban-locality polygons Hagstofa Íslands (2026). Points inside an urban polygon are classified as Urban, and valid points outside all polygons as Rural. A defined Vestmannaeyjar area is also classified as Urban. The same 2020–2024 polygon dataset is applied to the full 2007–2025 accident period. Changes in urban boundaries before 2020 are not represented.

Accident selection, 2007–2025



Figure 3.1: Available accident records, severity of the rural injury sample, and coverage of the main weather match. Damage-only accidents remain available but are not part of the injury outcome.

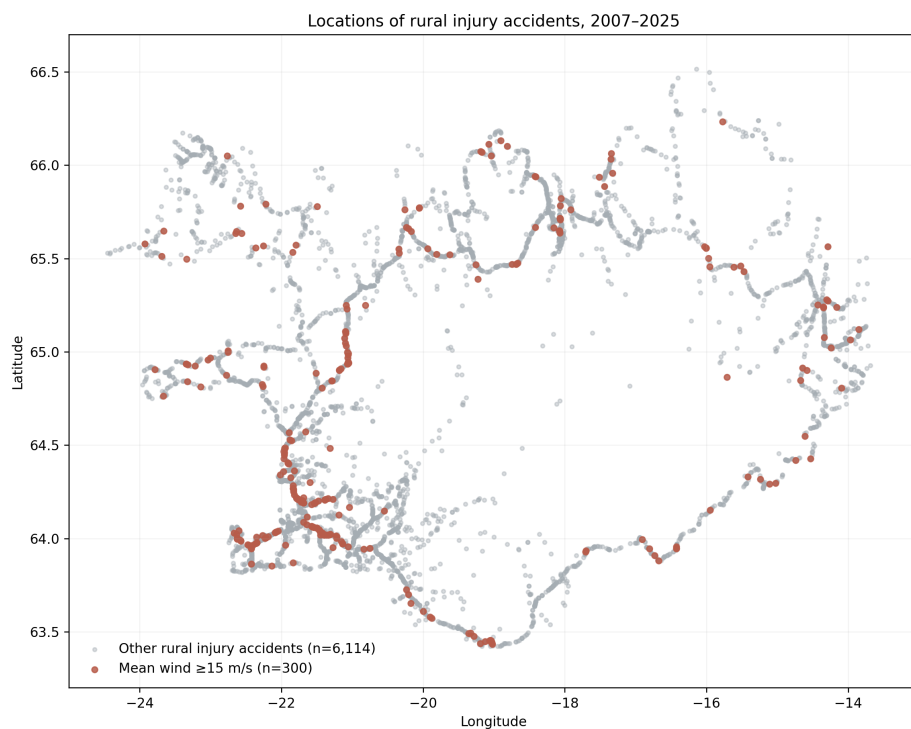


Figure 3.2: Locations of the 6,414 rural injury accidents. The 300 accidents matched to mean wind of at least 15 m/s are highlighted. The coordinates show the spatial coverage of the study; the figure is not a regional rate map.

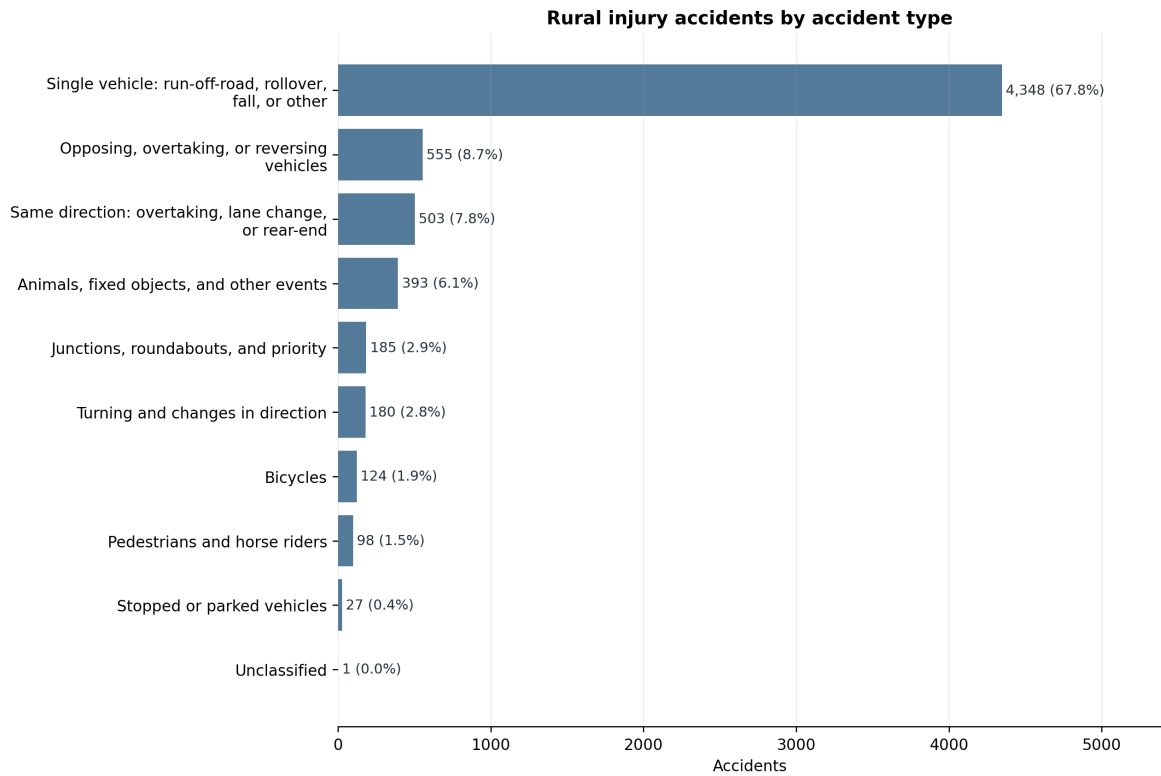


Figure 3.3: Accident-type distribution among the 6,414 rural injury accidents.

3.1.3 Weather Data

The weather source contains 10-minute observations from Icelandic weather stations. The variables used here are ten-minute mean wind speed (f), reported wind gust (fg), and temperature (t). For each accident, the gust is taken from the same matched ten-minute observation as mean wind; it is not the maximum across the accident day. Mean wind speed remains the main weather measure. A wind observation is used when

$$0 \leq f < 45, \quad 0 \leq fg < 65, \quad fg + 0.5 \geq f.$$

Rows missing either f or fg are excluded. Negative values, values at or above either upper limit, and internally inconsistent values where $fg = 0$ but $f > 0$ are excluded and reported in the annual audit. A value of $f = 0$ alone is kept. Only uninterrupted all-zero runs where $f = fg = 0$ for at least two hours are excluded as potentially frozen sensors. Missing temperature does not affect whether a wind observation is used.

Each accident is matched to the geographically nearest station with a clean wind observation at either adjacent timestamp on the 10-minute observation grid. The observations have 10-minute resolution, but the selected observation is no more than five minutes from the recorded accident time. The main maximum distance is 20 km. The matching file includes all 6,414 accidents and records whether each accident meets the weather-match criterion.

Temperature is matched independently because the nearest station with valid wind does not always report temperature. The nearest temperature observation between -30 and 30°C within the same 20 km and five-minute limits is selected. The temperature station, distance, and time difference are stored separately. Wind and temperature may come from different stations.

This increases usable temperature coverage without changing the wind sample or discarding accidents with missing temperature.

Table 3.6 reports spatial and temporal match quality for wind and temperature. It shows both matched and unmatched accidents, making the greater loss of temperature observations visible before the later analyses.

Table 3.6: Quality of the primary accident–weather matches (20 km and five minutes). Distances are median / P90; time differences are median / maximum.

Variable	Matched	Unmatched	Stations	Distance (km)	Time (min)
Mean wind and gust	6,192 (96.5%)	222	270	5.8 / 13.0	2.0 / 5.0
Temperature	5,707 (89.0%)	707	252	7.2 / 15.2	2.0 / 5.0

Table 3.7: Wind-quality audit of all delivered station-time rows, 2007–2025

Category	Records	Share of total
All delivered station-time rows	226,580,952	100.00%
Rows from station-years without wind data	11,810,743	5.21%
Records assessed for wind quality	214,770,209	94.79%
Missing f or fg	427,778	0.19%
Negative or upper-threshold wind	300,649	0.13%
Internally inconsistent f/fg	2,268	0.00%
Frozen all-zero runs (≥ 2 hours)	2,541,617	1.12%
Clean wind observations retained	211,497,897	93.34%

In total, 93.34% of all delivered rows are kept. Among the 214,770,209 rows from station-years that contain wind measurements, retention is 98.48%. The detailed audit reports each cleaning rule separately. The audit and the weather-distribution figure use the full 2007–2025 weather delivery. For each accident’s station and season, the O/E expected count uses all clean background observations in that station–season group, not only observations recorded on accident days.

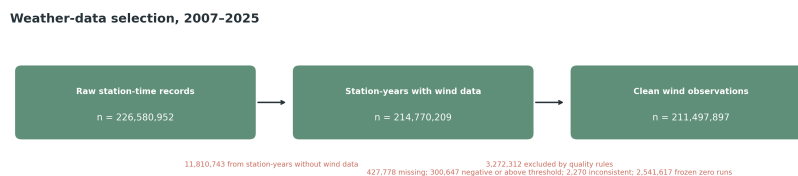


Figure 3.4: Weather observations retained after the documented wind-quality rules.

3.1.4 Traffic Data

Two traffic sources are used for different purposes.

Annual road-section files provide average annual daily traffic (ADU), summer daily traffic (SDU), winter daily traffic (VDU), section length, and annual vehicle-kilometres for 2000–2025 Vegagerðin (2026). The road-section comparison uses the years shared with the accident study, 2007–2025. Following the official definitions, SDU covers June–September and VDU covers December–March. These files can be linked to accidents with a registered road-section code, but exact matching is much narrower than the weather matching.

Table 3.8: Traffic periods used in the annual-traffic analysis.

Period	Months	Daily traffic reference
VDU	December–March	Official winter daily traffic
SDU	June–September	Official summer daily traffic
VHDU	April–May and October–November	Derived from ADU after the VDU and SDU totals have been removed

Throughout the analyses, the four study seasons are aligned with these traffic periods: winter is December–March, spring is April–May, summer is June–September, and autumn is October–November. These are study-specific traffic-aligned seasons rather than conventional three-month meteorological seasons. VHDU is a transparent residual estimate, rather than an additional official traffic measure.

Daily traffic counts extracted from Vegagerðin reports cover 2019–2024. They describe observed traffic at counter sites and are useful for measuring travel demand during windy days. They do not provide hourly vehicle-kilometres at every accident location. More than one counter may also occur on a road section. Each report identifies a counter by road section and *stöð* (road station). The station value is placed along the official road geometry and marked as an estimated location; annual-file start and end stations are used only as a fallback where the official station range is unavailable. They are therefore used only to describe whether travel demand changes on windy days; they are not part of the main O/E calculation.

3.2 Data Preparation and Reproducibility

The repository groups the code into weather, accident, traffic, table, and figure modules. Preparation scripts clean and match source records, table scripts calculate numerical results, and figure scripts draw completed tables. The repository README identifies the individual programs. After the authorised source deliveries have been placed locally, the reported results can be regenerated with

```
.venv/bin/python -m src.prepare --stage prepare
.venv/bin/python -m src.analyze
```

Figures are generated by the figure scripts and are not manually edited.

Traffic data selection

Annual traffic: road-section comparison



Daily counter traffic: travel-demand diagnostic



Figure 3.5: Coverage of the annual road-section data, the road-section wind table, and the separate daily-counter comparison.

3.3 Analysis

3.3.1 Weather-Frequency Comparison

Accident-time mean wind speed $\bar{f}$ is the main weather measure and is divided into 5 m/s intervals. It is the ten-minute mean wind observation matched within five minutes of the accident time, not an instantaneous measurement. Wind gust $\bar{f}_g$ from the same observation and independently matched temperature are additional weather measures. For each measure, an accident is compared with the distribution at its matched station in the same study season, pooled across all study years. Expected counts are based on how often each condition occurred locally rather than on a national weather distribution.

Temperature uses the same station-and-season O/E structure with independently matched temperature stations. The intervals are below -6, -6 to -3, -3 to 0, 0 to 3, 3 to 6, 6 to 9, 9 to 12, 12 to 15, and at least 15°C. The seven closed intervals have equal 3°C widths; the two open tails retain every valid match.

Let g identify a weather station and study season. Let A_{jg} be the number of accidents in weather interval j and group g , and let $A_g = \sum_j A_{jg}$. From all clean 10-minute observations, let T_{jg} be the number in interval j and T_g the total in group g . The local background frequency is

$$p_{jg} = \frac{T_{jg}}{T_g}.$$

If accident timing followed local wind frequency, the expected number in the interval would be $A_g p_{jg}$. The pooled observed/expected ratio is

$$R_j = \frac{\sum_g A_{jg}}{\sum_g A_{jg} p_{jg}}.$$

A value of one means that the accident share equals the local time share of the weather interval. A value above one means that accidents are over-represented in that interval. Standardisation within station and season prevents locations or seasons with different weather distributions from dominating the result.

Uncertainty is estimated with 5,000 weather-station-clustered bootstrap replicates. Stations are sampled with replacement, while all seasons, weather observations, and accidents associated with a sampled station remain together. The reported interval is the 2.5th to 97.5th percentile of the bootstrap distribution.

3.3.2 Matched-Time Comparison

As a separate check, each accident time is matched to the other occurrences of the same weekday and clock time in the same calendar month and year. Mean-wind and gust controls use the accident's matched wind station; temperature controls use its independently matched temperature station. Control weather must satisfy the same five-minute observation-time rule, and both station matches are restricted to 20 km. Conditional logistic regression compares weather at the accident time with weather at its matched control times. This time-stratified referent strategy was selected to avoid overlap bias and to control calendar time without selecting controls from outside the accident month Janes et al. (2005).

This design controls exactly for weather station, year, month, weekday, and clock time. It controls recurring travel schedules more tightly than the seasonal O/E analysis without estimating hourly traffic from daily counts. It does not control unusual traffic changes, road conditions, or other time-varying causes on a particular day. Continuous effects are reported per 5 m/s or 5°C, together with categorical estimates. The pre-specified mean-wind O/E remains the main result.

Mean wind and temperature are also entered together as categorical variables in one matched-time model. This checks whether the wind estimate persists when temperature at the same case and control times is included. Daylight is calculated at the accident location for the accident date and the same matched dates. Because month, weekday, and clock time are held fixed, only strata that change between darkness, civil twilight, and daylight contribute information.

Seasonal differences in the mean-wind association are tested in a separate matched-time model. Mean wind is grouped as 0–10, 10–15, and at least 15 m/s for stability. The model includes interactions between wind interval and season, and a likelihood-ratio test compares it with a model having one common wind association across seasons. The omnibus test is used instead of judging seasonal differences from separate confidence intervals.

A separate logistic model describes serious-or-fatal rather than minor injury among accidents with complete wind and temperature matches. It includes broad categories of mean wind, temperature, daylight, time of day, and season. The result concerns injury severity among recorded accidents. It is not a model of whether an accident occurs and does not replace the traffic analyses.

3.3.3 Use of Traffic Data

The main analysis uses background wind time. Traffic is not included because it is unavailable at the spatial and temporal resolution required for the full study period. The descriptive estimated-rate calculation uses annual traffic on every eligible road section, including sections without an accident. The main conditional model has a narrower purpose and sample: it includes 4,958 accidents in road-section–year–traffic-period strata that contain an accident and have a valid weather and traffic link. Both calculations use SDU and VDU where they are published, and a clearly labelled residual VH DU estimate for April–May and October–November.

Using those traffic data in the main curve would change the study population and mix seasonal average traffic with 10-minute accident-time wind. The curve measures *wind-frequency-adjusted relative accident occurrence*. It does not itself measure accident rate per vehicle.

3.3.4 Road-Section Traffic Comparison

Traffic is included where the spatial and temporal keys can be linked explicitly. For road section, year, official traffic period, and wind interval k, j , estimated vehicle-kilometres are

$$V_{kj} = q_k L_k D_k p_{kj},$$

where q_k is SDU, VDU, or derived VH DU vehicles per day, L_k is section length, D_k is the number of calendar days, and p_{kj} is the local share of clean 10-minute observations in the wind interval. The accident rate is

$$\text{Rate}_j = \frac{A_j}{\sum_k V_{kj}} \times 100,000,000.$$

This method accounts for road length and for spatial and seasonal differences in published traffic. It still assumes that traffic within a traffic period is distributed across wind intervals in proportion to time. It does not observe traffic at the accident minute. The station nearest the road-section midpoint with qualifying data supplies p_{kj} . Each accident is then matched again, specifically to that road-section station; the station used by the main O/E match is not carried into this model. An accident is included only when the road-section station is within 20 km and has a valid observation within five minutes. Thus the `weather_station_id` in the compact model input is the same station for the accident count and its estimated denominator.

The main traffic result is a conditional Poisson model. Each road section, year, and traffic period has its own intercept. For stratum k and wind interval j , the model is

$$\log E(A_{kj}) = \alpha_k + \beta_j + \log V_{kj},$$

where A_{kj} is the accident count and $\log V_{kj}$ is the offset. The exponentiated coefficient $\exp(\beta_j)$ is the estimated rate ratio relative to 0–5 m/s within otherwise identical road-section–year–period strata.

The model is fitted separately for all injury accidents and for serious or fatal accidents. A seasonal extension uses year-specific station frequencies for winter, spring, summer, and autumn. Because individual 5 m/s upper bins are sparse within seasons, that extension uses 0–10, 10–15, and at least 15 m/s. Winter and summer use published VDU and SDU, respectively; spring and autumn use the same derived VHDU daily volume but retain separate weather frequencies and accident counts.

Two additional models use the same road, year, traffic-period, and station alignment. The first replaces wind frequency with temperature frequency and uses the nine fixed temperature intervals, with 0 to 3°C as the reference. A traffic period is used only when temperature observations cover its complete season definition; both spring and autumn must be present for VHDU. Accident temperature is measured at the road-assigned station rather than the independently selected temperature station used in the O/E analysis. The second version fits one-vehicle and multiple-vehicle accident counts separately, using the coarse wind intervals 0–10, 10–15, and at least 15 m/s to avoid sparse subgroup cells. Both use estimated exposure and do not add minute-level traffic observations.

The descriptive rate and conditional model include different road records. The descriptive rate sums estimated vehicle-kilometres over every eligible road section. The conditional model includes only road-section–year–period strata containing at least one accident, because all-zero strata provide no within-stratum information: after conditioning on a stratum’s total accident count, a total of zero contributes no likelihood for comparing its wind intervals. Those roads remain in the separate descriptive rate that sums all eligible exposure. Wind intervals with positive estimated vehicle-kilometres are kept within those groups. The two traffic results answer different questions and are not expected to reproduce the same rate ratios.

The annual source contains 22,982 road-section/year rows for 2007–2025. There are 1,509 rows with nonpositive published VDU and 552 rows with a nonpositive derived VHDU residual. The affected period is excluded rather than imputed. Seasonal patterns such as SDU below VDU are audited but are not automatically treated as errors.

The daily counter analysis is kept separate from the vehicle-kilometre model. It describes whether traffic at selected counters is lower on windier days; it does not directly observe vehicle-kilometres in each 10-minute wind interval. An illustrative direction check rescales the annual-model denominator using the observed/expected daily traffic percentage in the corresponding full-day mean-wind interval. This deliberately combines unlike resolutions and periods, so it is not a corrected rate estimate. It shows only what direction the annual rate ratios would move if the 2019–2024 daily pattern at selected counters also applied within the annual traffic periods.

3.3.5 Daily Traffic Comparison

Daily traffic is analysed separately because its weather definition is daily. Directional channels are first summed to one 24-hour count for each physical counter and date. The unit is then one fixed counter on one date; separate counter sites on the same road section are not summed. For each counter, year, month, and weekday, expected traffic is the arithmetic mean of the available daily counts in that same group. The traffic index is

$$I_{cd} = 100 \times \frac{Q_{cd}}{\text{mean}(Q_{c, \text{same year, month, weekday}})}.$$

An index below 100 indicates fewer counted vehicles than the mean for that local calendar context. For each wind interval, the observed-to-expected traffic ratio is aggregated across counter-days; 100 denotes the calendar-standardised expected traffic. The arithmetic mean is used so expected and observed totals balance within a complete calendar stratum; medians are used only in separate counter-quality summaries. It describes the participating counter sites rather than national traffic. The calculation is also repeated within VDU, SDU, and VHDU to show whether the traffic response is confined to one part of the year. The 24-hour traffic count is not converted into hourly traffic. Mean wind is calculated from clean observations between 10:00 and 21:59, so this is a daily association rather than an estimate of traffic in that window. The source contains 5,432 counter-days with a reported count of zero. They are kept because the reports do not distinguish a genuine zero or road closure from counter downtime. Consequently, the daily result is supplementary and the result with zero counts excluded should be inspected before interpretation. The report's *stöð* is placed proportionally between the official start and end stations on the registered road-section geometry. The resulting coordinate is explicitly marked as estimated rather than treated as a surveyed counter position. This locates 2,325 of 2,332 counter-site years; the seven unresolved site-years remain without a weather match. An independent check finds an official 20 m road-station point within 10 station metres for 435 of 473 distinct located sites; among those matches, the median coordinate difference is 5.0 m and the 90th percentile is 9.0 m. Failure to find a point within that narrow query window is recorded as unresolved rather than silently accepted. For each located counter, the nearest station within 20 km having usable observations that day is selected. Uncertainty in the daily traffic estimate is obtained by resampling whole counters 1,000 times.

Counter-year mean traffic is compared with exact road-section ADU as a consistency check. A near-complete counter-year has at least 300 observed days; single-counter road sections are evaluated separately because multiple PDF records can represent different locations, directions, or lanes.

Sustained wind is described by the number of valid ten-minute observations in each counter-day with mean wind of at least 15 m/s; six observations equal one hour. Days must contain at least 108 valid observations. Traffic is compared across 0, more than 0–2, 2–6, and at least 6 hours of strong wind using the same counter–calendar standardisation.

The allocated daily-counter rate model uses a stricter accident linkage. Each 2019–2024 accident requires a counter on the exact registered road section and year within 20 km, positive traffic on its date, and qualifying accident-time mean wind. For counter (c), date (d), and wind interval (j), the observed 24-hour count is allocated according to the counter station's valid ten-minute observations:

$$\hat{Q}_{cdj} = Q_{cd} \frac{N_{cdj}}{N_{cd}}.$$

Accidents are classified by accident-time *f* from the same station used for the counter-day denominator. That station must be within 20 km of both the accident and counter, and the accident observation must be within five minutes of the recorded time. Estimated traffic and

accidents are aggregated by counter, year, and wind interval, and a conditional Poisson model gives each counter–year its own intercept. The allocation assumes uniform traffic across valid observation times; it is an estimated within-day traffic split, not observed hourly traffic. The full-day-mean model is shown only as a day-level check in the appendix. The main allocation uses all sufficiently complete 24-hour weather records. A separate check assumes all daily traffic occurs from 07:00 to midnight, uses only weather observations and accidents in that interval, and is reported only to show the effect of that unverified assumption. Both versions are also fitted for the serious-or-fatal outcome where counts permit.

4 Results

Results follow the research questions. Mean-wind O/E answers Question 1. Gust, temperature, and matched-time weather estimates answer Question 2. Matched daylight and the formal seasonal comparison answer Question 3, and the severity model answers Question 4. The annual and daily traffic estimates answer Question 5. Raw counts and detailed subgroup figures are shown in the appendix as descriptions of the data, not as estimates of risk.

4.1 Study Sample and Coverage

Table 4.1: Coverage of the retained analyses

Analysis step	Retained	Starting set	Share
Wind match within 10 km	4,858	6,414	75.74%
Wind match within 20 km (primary)	6,192	6,414	96.54%
Wind match within 30 km	6,399	6,414	99.77%
Temperature match within 20 km	5,707	6,414	88.98%
Exact annual road-section match, 2007–2025	5,731	6,414	89.35%
Stratified accident-rate analysis	4,958	6,192	80.07%
Daily counter-days with daytime wind	738,424	774,274	95.37%
Allocated daily-counter rate, 2019–2024	758	1,863	40.69%
Full-day-mean daily-counter check, 2019–2024	767	1,863	41.17%

The 20 km threshold includes most accidents while limiting the spatial distance to the weather proxy. Increasing the threshold to 30 km adds 207 accidents but can be misleading in complex terrain. The road-section analysis is much narrower than the main analysis and is not equally representative.

The two annual-traffic rows have different analytical meanings. The first records an exact road-section and year link. The second also requires a defined traffic period and usable annual traffic and weather-frequency information. It is the population used for the estimated crash-rate analysis below.

The selection is explicit: 126,607 source accidents are reduced to 6,414 rural injury accidents by the outcome and location rules; 6,192 of these have a qualifying wind match; 5,731 have an exact road-section/year traffic link; and 4,958 enter the conditional traffic model. Within 2019–2024, 758 of 1,863 accidents enter the allocated daily-rate model after requiring the exact road section, a valid observed counter-day, the same weather station for the accident and denominator, and all 20 km distance limits. The less restrictive full-day-mean check includes 767 accidents and is reported only in the appendix. Each reduction answers a different data requirement, and no unmatched accident is silently reassigned.

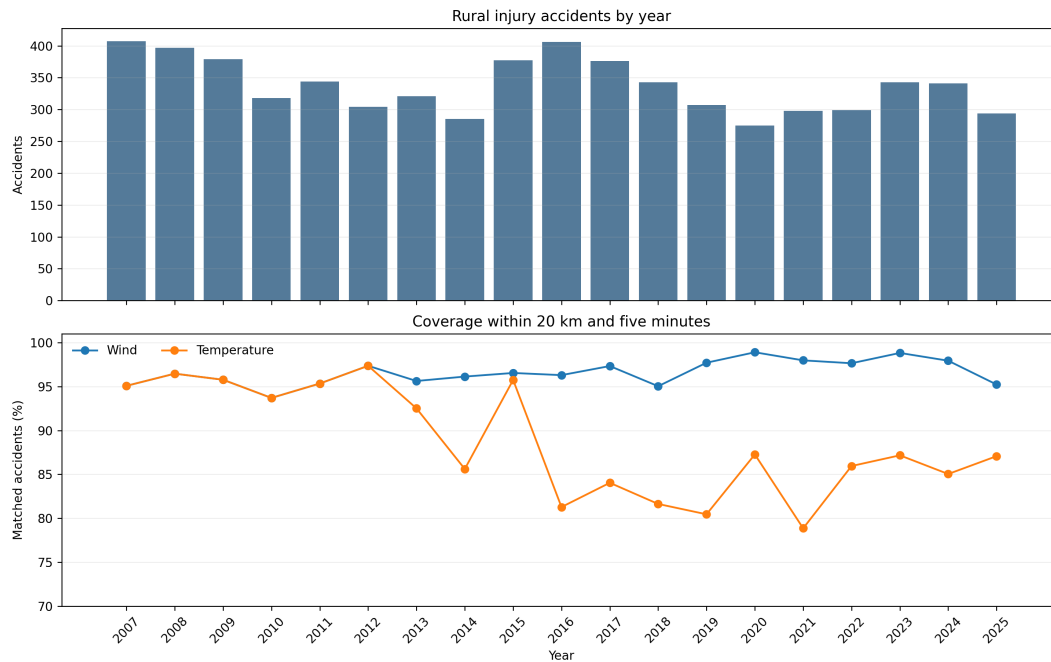


Figure 4.1: Annual rural injury-accident counts and the percentage matched to wind or temperature within 20 km and five minutes. No missing temperature value is imputed.

4.2 Mean Wind

Ratios are close to one across most low and moderate intervals. The plotted ratios increase from 15 m/s. At mean wind speeds of 20–25 m/s, 61 accidents were observed compared with 29.0 expected. The O/E ratio is 2.11, with a station-clustered interval of 1.54–2.73. At mean wind speeds of at least 25 m/s, 16 accidents were observed compared with 6.4 expected (O/E 2.49; 95% interval 0.86–5.37). This interval includes one and is too imprecise to support a separate conclusion at 25 m/s or above. The more informative upper mean-wind result is the 20–25 m/s interval.

The 5 m/s grouping is used throughout because it gives a direct, readable description of the upper wind intervals without implying that the boundaries are physical thresholds.

The upper-wind pattern is stable under the pre-defined spatial alternatives (Table 4.2). At 20–25 m/s, O/E is 2.32 using 10 km, 2.11 using the chosen 20 km limit, and 2.05 using 30 km. The wider radii add accidents but do not create the association. The ≥ 25 m/s interval remains imprecise under every radius because it contains only 15–17 accidents.

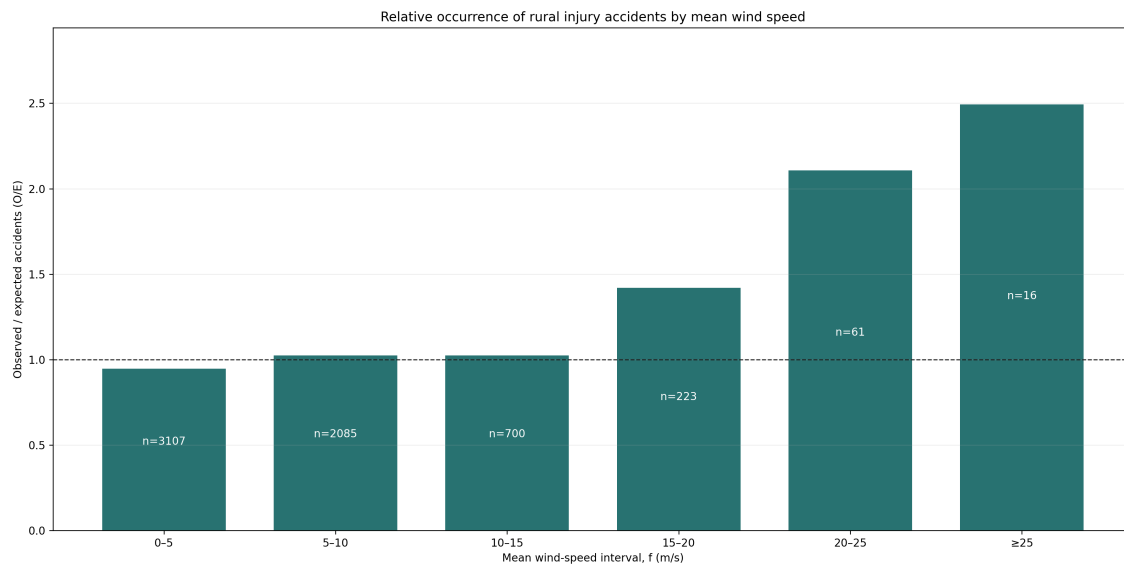


Figure 4.2: Wind-frequency-adjusted relative occurrence of rural injury accidents by mean wind speed. The label inside each bar is the observed accident count. Traffic volume is not included. Bootstrap intervals are given in the text rather than drawn on the figure.

Table 4.2: Primary mean-wind O/E under three weather-station distance limits

Radius	Primary	Mean wind	Observed	Expected	O/E (95% interval)
10 km	No	15–20	192	123.8	1.55 (1.34–1.76)
10 km	No	20–25	53	22.8	2.32 (1.67–3.06)
10 km	No	≥25	15	5.3	2.85 (0.90–6.20)
20 km	Yes	15–20	223	157.1	1.42 (1.23–1.60)
20 km	Yes	20–25	61	29.0	2.11 (1.54–2.73)
20 km	Yes	≥25	16	6.4	2.49 (0.86–5.37)
30 km	No	15–20	227	162.9	1.39 (1.20–1.58)
30 km	No	20–25	62	30.2	2.05 (1.51–2.68)
30 km	No	≥25	17	6.9	2.47 (0.93–5.23)

4.3 Wind Gust and Temperature

4.3.1 Wind Gust

Matched-time wind gust is an additional weather measure rather than a daily maximum. Its O/E pattern rises through the upper intervals. At gusts of at least 35 m/s, 28 accidents were observed compared with 5.5 expected (O/E 5.06; 95% interval 2.94–7.57). This supports the interpretation that hazardous wind conditions are over-represented, but gust and mean wind are related measures and should not be treated as independent results.

Appendix Table A.1 gives the highest-gust result under three weather-station distance limits.

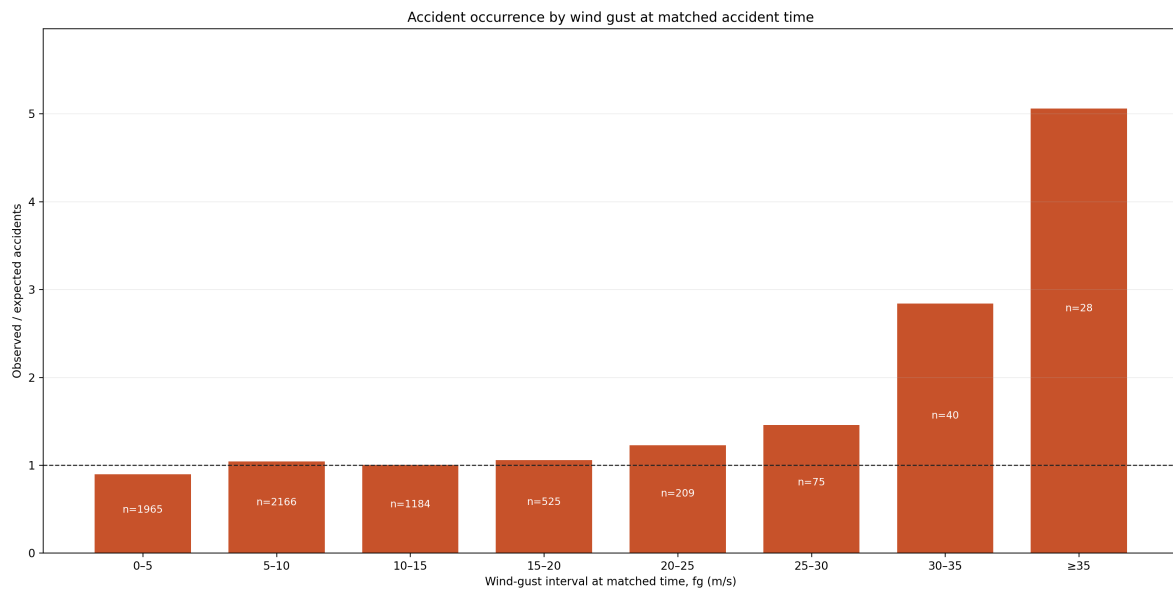


Figure 4.3: Frequency-adjusted observed/expected accident occurrence by wind gust in the ten-minute observation matched to the accident time. Labels show observed accidents; the measure is not a daily maximum.

4.3.2 Temperature

Temperature is interpreted cautiously. Valid temperature was available for 5,707 accidents (88.98%). Coverage by year ranges from 78.86% to 97.37%, so no temperature value is imputed. Coverage is at least 78.86% in every year but is generally lower from 2016 onward than in 2007–2015. After adjustment by temperature station and season, the estimates were non-monotonic. O/E was below one at 3–6°C (710 observed and 1,034.6 expected; O/E 0.69, station-bootstrap 95% CI 0.64–0.73), but above one at both -3–0°C (O/E 1.17, 1.09–1.25) and 0–3°C (O/E 1.10, 1.02–1.18). It also increased in the warm tail: at 12–15°C O/E was 1.41 (1.29–1.54), and at 15°C or above 243 accidents were observed compared with 111.8 expected (O/E 2.17, 1.91–2.46). This pattern may reflect travel behaviour or weather and road conditions associated with temperature. It is not interpreted as a causal temperature effect.

Because weather conditions and reporting coverage can change over a 19-year period, Table 4.3 repeats selected mean-wind and temperature results after defining the expected distribution within weather station, season, and year. The simpler pre-specified station–season result remains the main result.

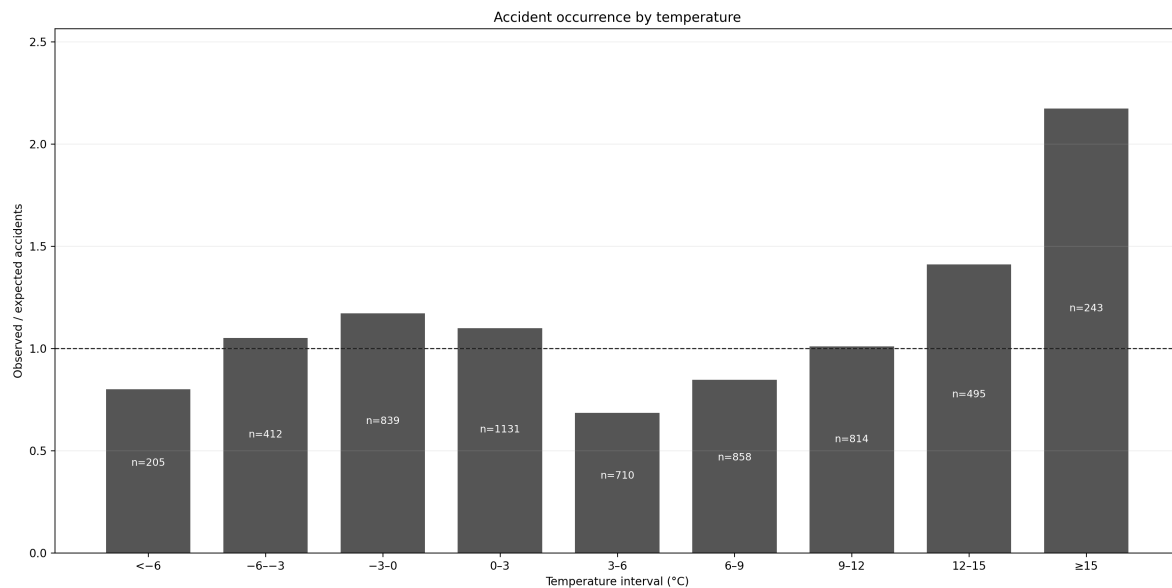


Figure 4.4: Temperature O/E estimates standardised by independently matched temperature station and study season. Labels show observed accident counts. The non-monotonic pattern is interpreted cautiously.

Table 4.3: Selected pooled and year-adjusted O/E estimates

Variable	Interval	Observed	Station + season O/E (95% interval)	Station + season + year O/E (95% interval)
Mean wind (m/s)	15–20	223	1.42 (1.23–1.60)	1.43 (1.23–1.62)
Mean wind (m/s)	20–25	61	2.11 (1.54–2.73)	2.12 (1.57–2.72)
Mean wind (m/s)	≥25	16	2.49 (0.86–5.37)	2.70 (0.96–5.69)
Temperature (deg C)	–3–0	839	1.17 (1.09–1.25)	1.17 (1.09–1.24)
Temperature (deg C)	0–3	1,131	1.10 (1.02–1.18)	1.11 (1.03–1.18)
Temperature (deg C)	3–6	710	0.69 (0.64–0.73)	0.69 (0.65–0.74)

The results change little. At 20–25 m/s, O/E changes from 2.11 to 2.12. For temperature, the 3–6°C estimate remains 0.69, while the estimate at 15°C or above changes from 2.17 to 2.19.

4.4 Matched-Time Results

The case-crossover analysis includes 6,190 mean-wind and gust strata with 20,869 control times for each measure, and 5,697 temperature strata with 19,175 control times. A 5 m/s increase in mean wind is associated with a matched odds ratio of 1.08 (95% CI 1.04–1.12). The categorical estimate changes mainly at mean wind of at least 15 m/s: the odds ratio relative to 0–5 m/s is 1.61 (95% CI 1.39–1.87). This supports the high-wind pattern after exact control for station, year, month, weekday, and clock time.

For gust, the matched odds ratio per 5 m/s is 1.06 (95% CI 1.04–1.09). Relative to 0–10 m/s, it is 1.33 (1.13–1.57) at 20–25 m/s, 1.46 (1.11–1.92) at 25–30 m/s, and 3.21 (2.30–4.48) at 30

m/s or above. The matched-time result agrees with the upper-gust O/E pattern.

The temperature estimates are not monotonic. Relative to 0–3°C, the matched odds ratio is 1.12 (95% CI 1.01–1.25) at –3–0°C, 0.57 (0.51–0.63) at 3–6°C, and 1.07 (0.85–1.33) at 15°C or above. The matched-time result reproduces the dip at moderate temperatures but not the warm-tail increase in the O/E analysis. The methods therefore give different results at warm temperatures, which calls for caution.

When mean wind and temperature are included together, the matched odds ratio for mean wind of at least 15 versus 0–5 m/s is 1.60 (95% CI 1.37–1.88). This is close to the corresponding single-variable estimate of 1.61. The non-monotonic temperature pattern also remains. The small change in the wind estimate shows that including these temperature categories changes the upper-wind association very little.

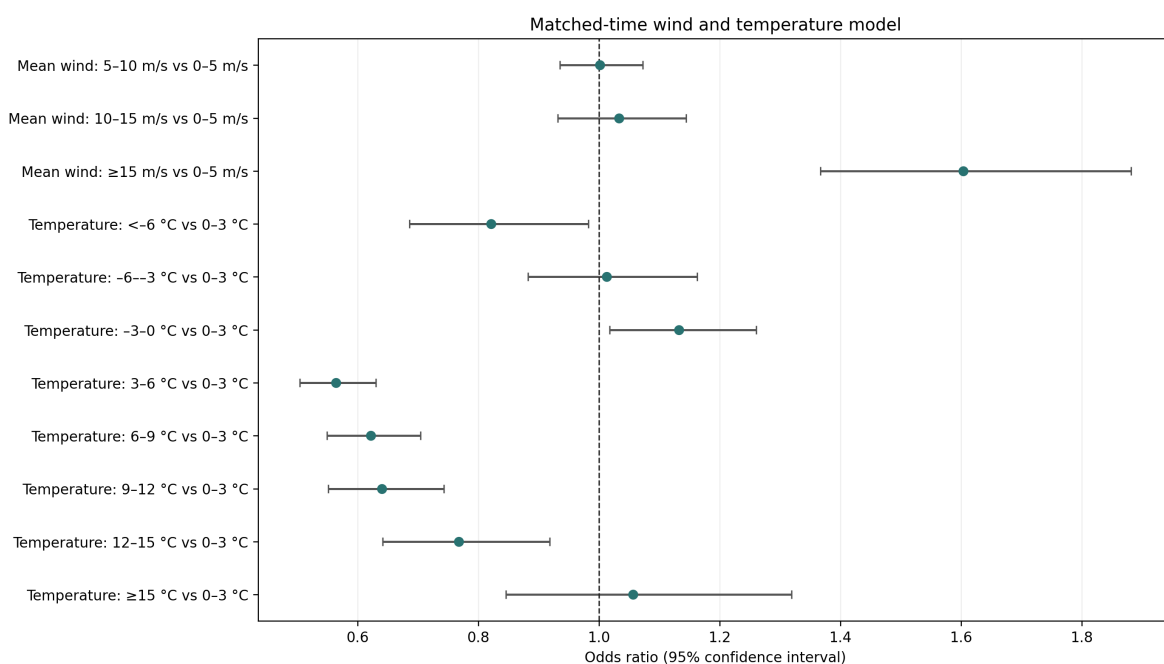


Figure 4.5: Matched-time odds ratios from the model containing mean wind and temperature together. Each accident is compared with the same location, month, weekday, and clock time. Error bars are 95% confidence intervals.

4.5 Daylight, Season, and Severity

The raw distributions by hour, season, daylight, and temperature are shown in Appendix Figure A.7. They document the study sample and sparse categories but are not used to rank accident risk.

The matched-date daylight comparison holds location, month, weekday, and clock time fixed. Relative to daylight, the odds ratio is 1.14 (95% CI 0.88–1.49) for darkness and 1.10 (0.92–1.31) for civil twilight. Only 985 of the 6,414 strata change daylight class within their matched dates. The result provides no clear evidence of a daylight association and is much less informative than the wind analysis; it does not use vehicle counts.

Among the 5,707 accidents in the adjusted severity model, 1,290 are serious or fatal. Mean

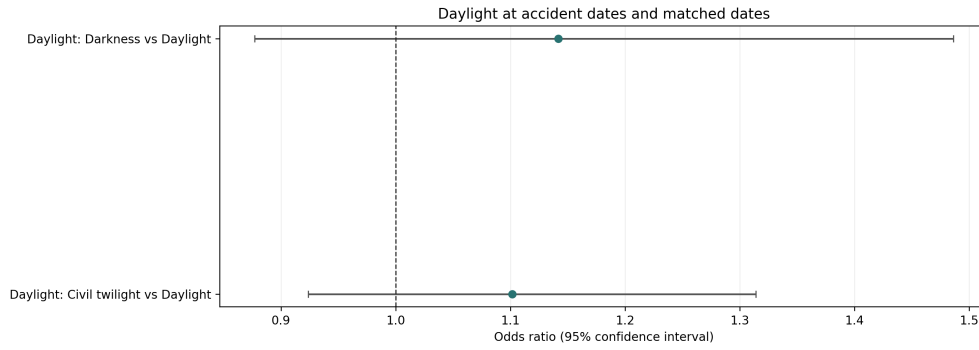


Figure 4.6: Odds ratios for daylight at accident dates compared with dates at the same location, month, weekday, and clock time. Only 985 strata change daylight class within the matched dates. Error bars are 95% confidence intervals.

wind of at least 15 m/s has an odds ratio of 0.95 (95% CI 0.70–1.30) relative to 0–10 m/s. Darkness has an odds ratio of 0.87 (0.69–1.10) relative to daylight. Thus the data show a clear strong-wind pattern for accident occurrence, but not for severity conditional on a recorded injury accident. The complete adjusted estimates are shown in the appendix.

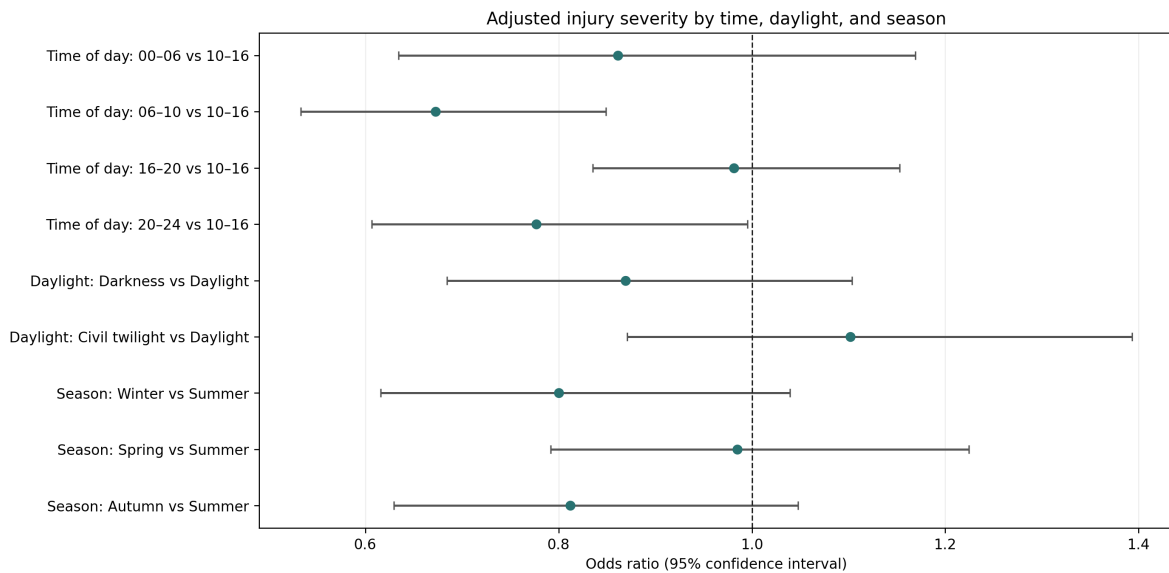


Figure 4.7: Adjusted odds of serious-or-fatal rather than minor injury by time of day, daylight, and season among 5,707 accidents with complete weather matches. The model also includes the wind and temperature categories shown in the full appendix figure. Error bars are 95% confidence intervals. These are severity comparisons conditional on a recorded injury accident, not accident-occurrence rates.

The formal matched-time wind-by-season comparison uses the same 6,190 mean-wind strata as the case-crossover analysis, with coarse intervals for stability. The omnibus interaction test gives $\chi^2(6) = 11.58$, $p = 0.072$. The estimated odds ratios for at least 15 versus 0–10 m/s are 1.51 in winter, 1.99 in spring, 2.37 in summer, and 1.32 in autumn. The estimates vary in magnitude, but the formal test does not provide strong evidence that the mean-wind association differs by season. Season-specific plots are included as descriptive material.

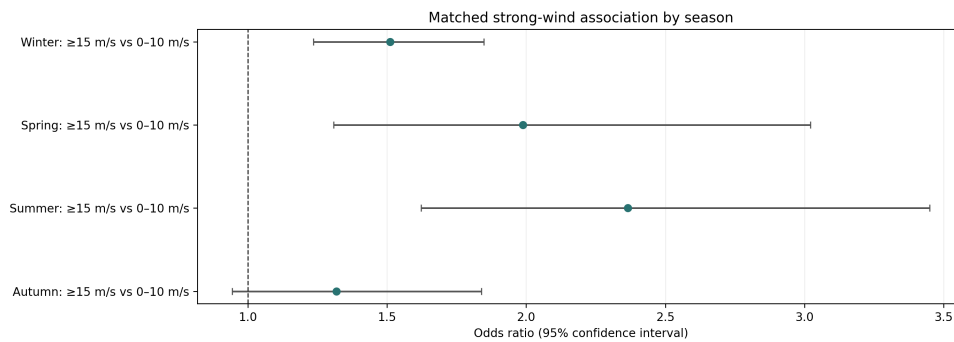


Figure 4.8: Season-specific matched-time odds ratios for mean wind of at least 15 m/s relative to 0–10 m/s. The estimates come from one interaction model; error bars are 95% confidence intervals. The omnibus wind-by-season test gives $p = 0.072$, so differences between individual estimates are not treated as established seasonal effects.

4.6 Traffic Results

The descriptive estimated rate increased from 8.49 rural injury accidents per 100 million estimated vehicle-kilometres at 0–5 m/s to 43.02 at 20–25 m/s. After comparison within road section, year, and traffic period, the corresponding conditional rate ratio was 2.38. The descriptive rate and conditional estimate differ because they aggregate and control road-section and period differences in different ways; both use traffic allocated to wind intervals rather than traffic observed at ten-minute resolution.

The conditional Poisson model includes 4,958 accidents in 4,004 road-section–year–traffic-period groups that contain accidents. Relative to 0–5 m/s, the estimated within-stratum rate ratio is 1.59 (95% CI 1.36–1.86) at 15–20 m/s, 2.38 (1.78–3.18) at 20–25 m/s, and 4.49 (2.75–7.34) at 25 m/s or above. The uppermost estimate contains 17 accidents and is less precise. These rates use traffic allocated within each period according to local wind frequency; they are not directly observed 10-minute traffic.

Applying the same estimated vehicle-kilometre construction to temperature includes 3,136 accidents in 2,562 road-section–year–traffic-period groups. Relative to 0–3°C, the within-group rate ratio is 0.75 (95% CI 0.61–0.92) below -6°C and 0.60 (0.53–0.69) at 3–6°C. It increases to 1.41 (1.18–1.68) at 12–15°C and 2.00 (1.59–2.50) at 15°C or above. The warm-end pattern agrees with the O/E result, but not with the matched-time result. Only stations used by the road traffic model are allowed, and vehicle-kilometres are allocated according to temperature frequency rather than observed directly at each temperature.

The serious-or-fatal model includes 1,054 accidents. Relative to 0–5 m/s, its rate ratio is 1.90 (95% CI 1.38–2.60) at 15–20 m/s and 2.17 (1.11–4.25) at 20–25 m/s. The at-least-25 m/s estimate is 4.70 (1.69–13.08), but contains only four accidents and is correspondingly imprecise.

Using coarse seasonal intervals, the rate ratio for at least 15 versus 0–10 m/s is 1.45 (95% CI 1.19–1.76) in winter, 2.85 (1.98–4.11) in spring, 2.12 (1.55–2.90) in summer, and 1.38 (1.02–1.87) in autumn. The corresponding upper-category counts are 122, 34, 44, and 47. The pattern is not confined to winter, although spring and autumn use derived VH DU traffic and should not be compared as precise seasonal rankings.

For serious or fatal accidents, the corresponding at-least-15 m/s estimates are 1.71 in winter,

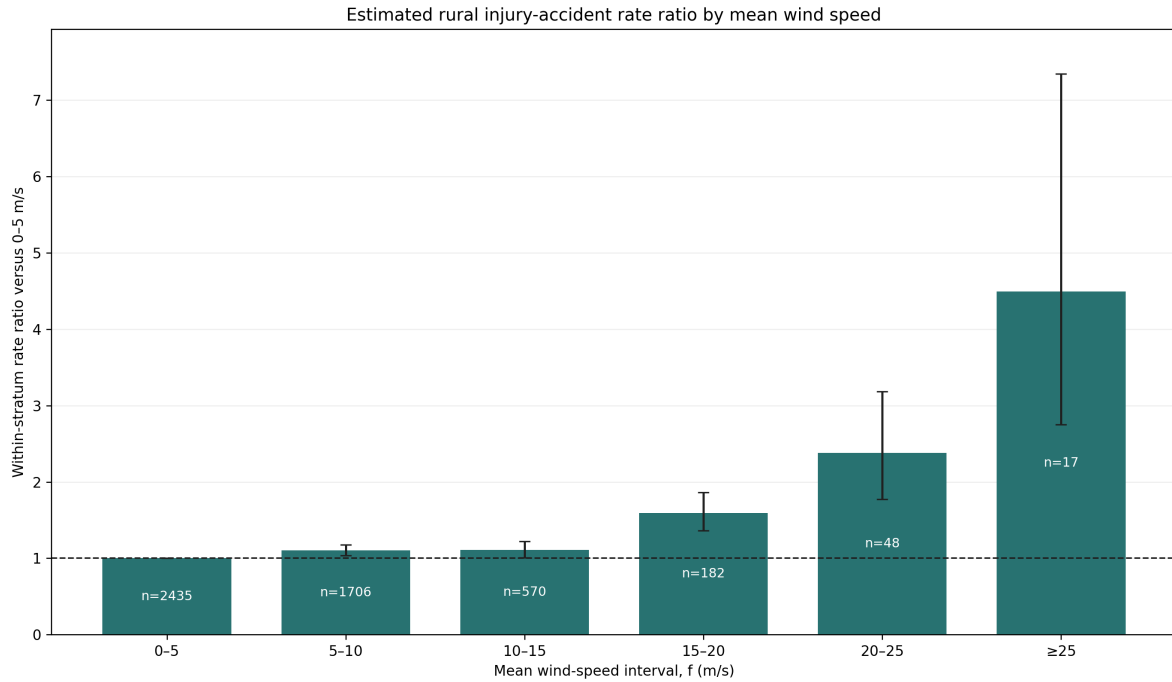


Figure 4.9: Estimated rural injury-accident rate ratios relative to 0–5 m/s. The model compares wind intervals within the same road section, year, and traffic period. Traffic is allocated within a period in proportion to local 10-minute wind frequency. Labels show observed accidents and error bars are 95% confidence intervals.

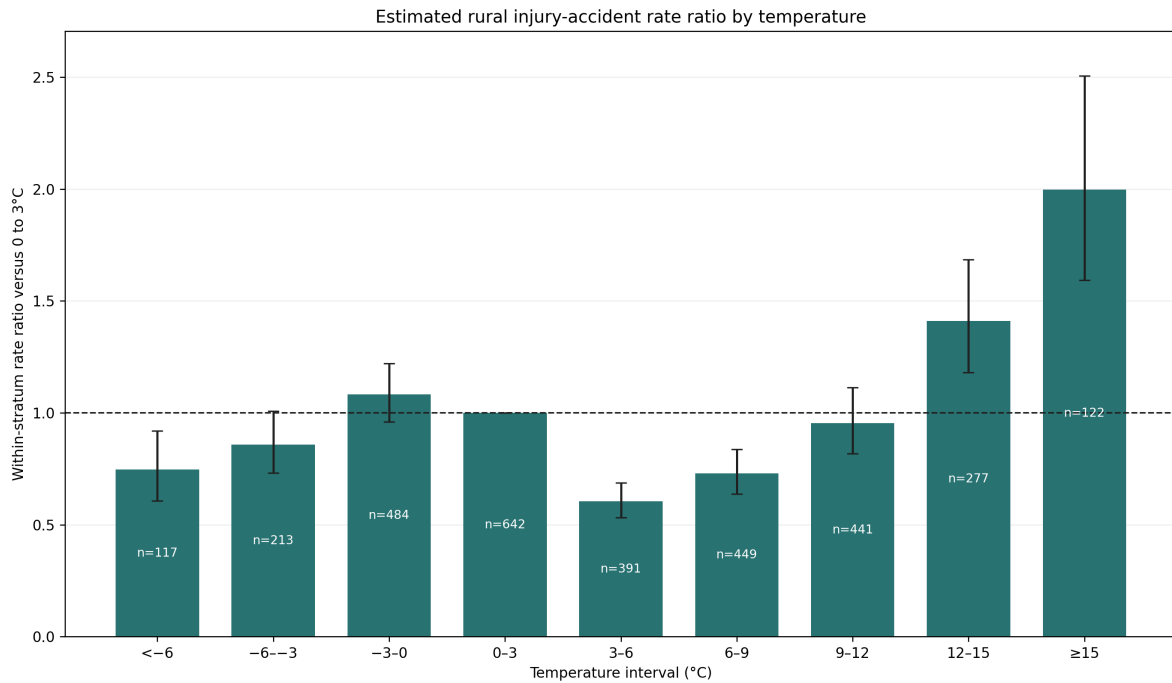


Figure 4.10: Estimated rural injury-accident rate ratios by temperature relative to 0–3°C. Comparisons are within road section, year, and traffic period. Vehicle-kilometres are allocated according to temperature frequency at the same road-assigned weather station used for the accident temperature. Labels show accidents and error bars are 95% confidence intervals.

1.88 in spring, 2.72 in summer, and 2.02 in autumn, based on 24, 6, 15, and 13 accidents. The spring upper category contains only six accidents and is imprecise. The detailed figure is shown in the appendix rather than used to rank seasons.

In separate coarse models, the rate ratio for at least 15 versus 0–10 m/s is 1.39 (95% CI 1.17–1.65) for one-vehicle accidents and 2.33 (1.86–2.91) for accidents involving two or more vehicles. The corresponding upper-category counts are 150 and 97. These separately fitted subgroup estimates do not by themselves prove that the associations differ, and the larger multiple-vehicle estimate should not be given a mechanical explanation that the available accident records cannot test. The complete comparison is shown in the appendix.

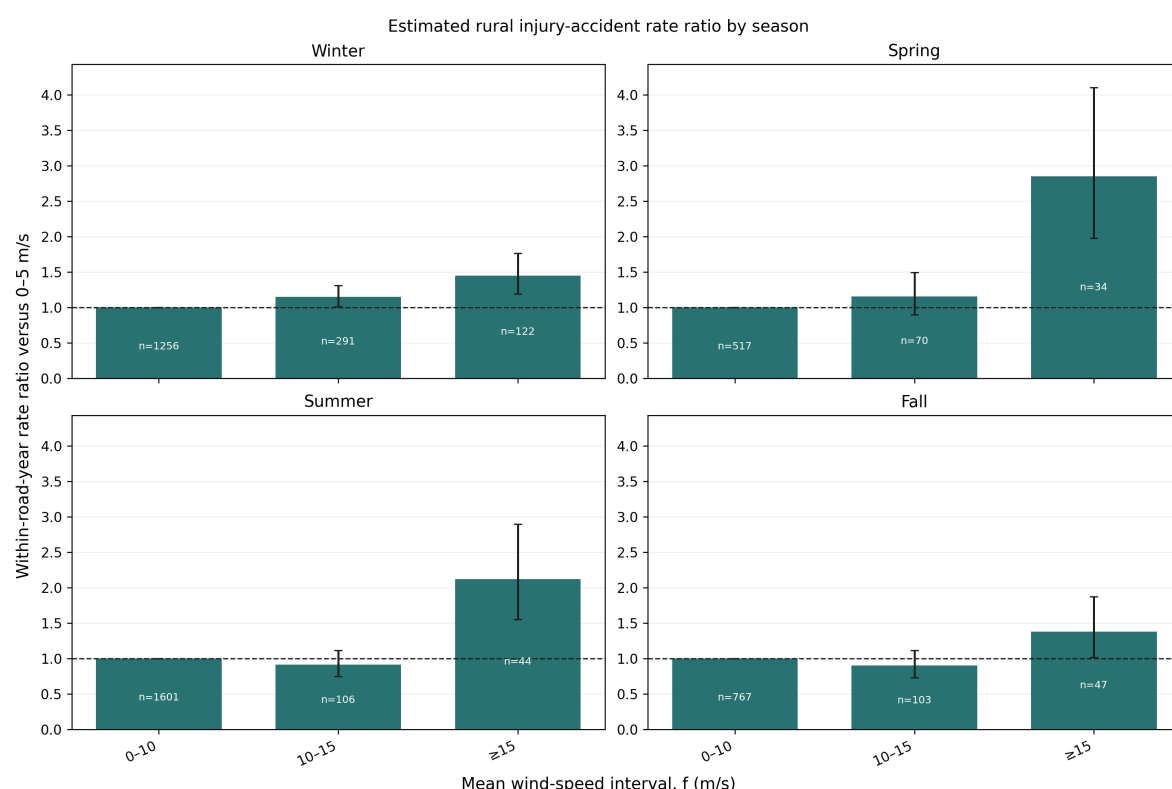


Figure 4.11: Estimated rural injury-accident rate ratios by season. Traffic and weather frequency are aligned by road section, year, and season. Coarse wind intervals avoid unstable one-event upper bins; labels show observed accidents and error bars are 95% confidence intervals.

Observed traffic decreases as strong wind persists. Relative to the calendar expectation at the same counter, traffic is 96.4% on days with more than zero but less than two hours at $f \geq 15$ m/s, 94.4% with 2–6 hours, and 88.9% with at least six hours. This duration measure is more informative than a single daily mean, but still describes selected counter sites.

The allocated daily-counter model includes 758 accidents in 487 counter–year groups that contain accidents. Relative to 0–10 m/s, the rate ratio is 1.62 (95% CI 1.31–2.00) at 10–15 m/s and 3.34 (2.44–4.58) for at least 15 m/s. The latter category contains 46 accidents. The calculation starts from observed daily traffic, but the within-day split is estimated from the counter station’s ten-minute wind frequency; it is not observed hourly traffic. Accident-time mean wind is taken from that same station, which is required to be within 20 km of the accident as well as the assigned counter. For serious or fatal accidents, the corresponding estimates are 1.82 (1.17–2.82; 25 accidents) at 10–15 m/s and 4.16 (2.25–7.69; 12 accidents)

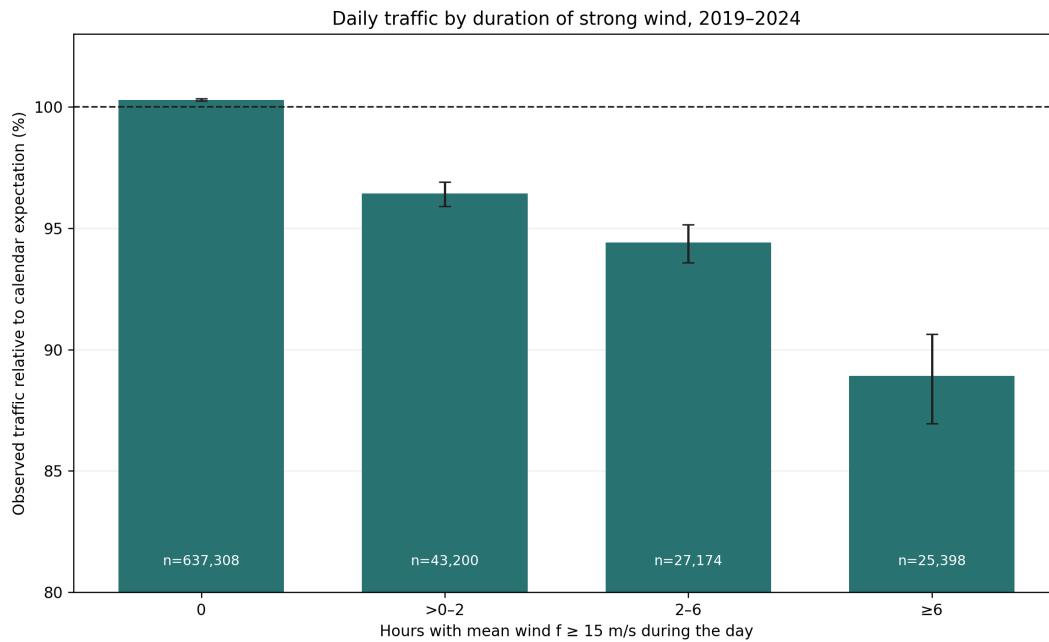


Figure 4.12: Observed daily traffic by duration of strong wind. Values are relative to the mean for the same counter, year, month, and weekday. Error bars are counter-clustered 95% confidence intervals; labels show counter-days.

for at least 15 m/s. Restricting the allocation and accident times to 07:00–24:00 changes the all-injury upper estimate only modestly, from 3.34 (2.44–4.58; 46 accidents) to 3.45 (2.50–4.76; 43 accidents). This stability does not validate the assumed time distribution; it only shows that the headline direction is not created by including midnight–07:00 weather.

Appendix Table A.11 addresses the two most important data questions. Restricting the rate model to the official VDU and SDU periods reduces the upper estimates but leaves their direction unchanged. Excluding daily counter records reported as zero changes the 20–25 m/s traffic estimate from 74.9% to 75.2%, so those records do not explain the observed decline.

Table 4.4: Summary of the evidence used to interpret the main result

Analysis	Comparison	Estimate (95% interval)	Interpretation and principal limitation
Primary O/E	20–25 m/s	2.11 (1.54–2.73)	Accident occurrence relative to local wind frequency; traffic is not included.
Matched time	≥ 15 vs 0–5 m/s	OR 1.61 (1.39–1.87)	Same calendar time; no direct measure of unusual daily travel changes.
Road-section traffic	20–25 vs 0–5 m/s	RR 2.38 (1.78–3.18)	Within road, year and traffic period; traffic is estimated from annual values.
Allocated daily rate	≥ 15 vs 0–10 m/s	RR 3.34 (2.44–4.58)	Observed daily total with estimated within-day allocation; 758 linked accidents.

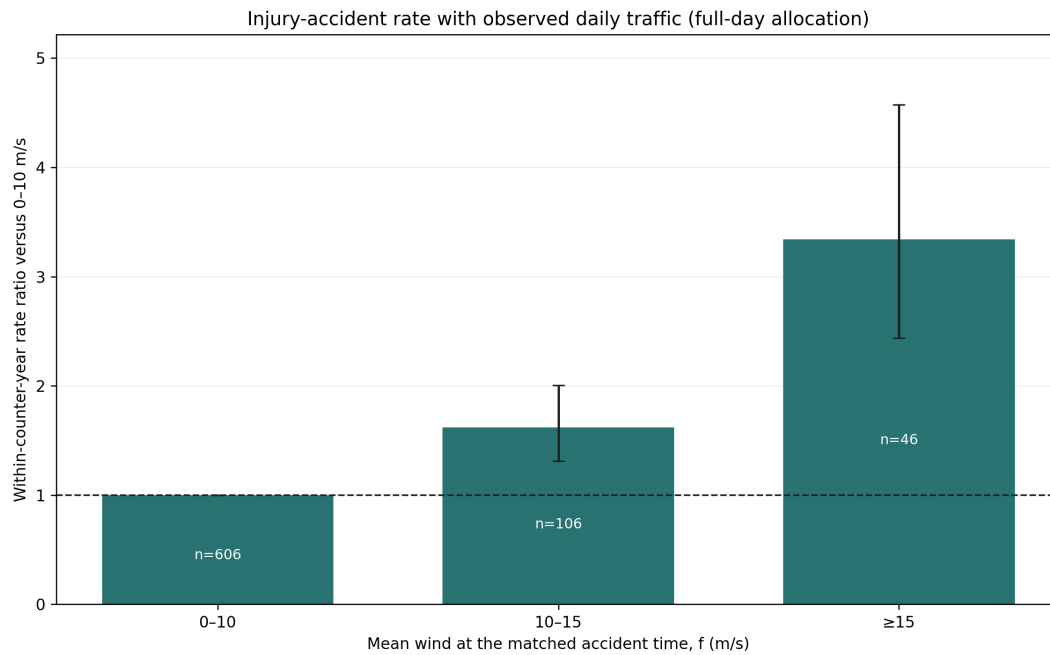


Figure 4.13: Daily-counter rural injury-accident rate ratios by accident-time mean wind. Observed 24-hour traffic is allocated within each day in proportion to the counter station's ten-minute wind frequency, and accidents use that same station. Comparisons are within counter and year; labels show accidents and error bars are 95% confidence intervals.

The four rows estimate different quantities and should not be compared by magnitude. Together they show the same direction: accidents are over-represented in strong wind even though observed traffic tends to be lower on windy days. The appendix direction check applies the daily percentages mechanically and changes the annual-model 20–25 m/s rate ratio from 2.38 to 3.20. This is not an adjusted estimate because a full-day count cannot identify traffic during individual ten-minute observations; it only shows that the proportional allocation is unlikely to create the elevated rate ratio.

The appendix gives the raw hour, season, daylight, and temperature counts and the detailed subgroup and traffic checks. These figures describe the sample or show how stable the main finding is; they are not additional estimates of hourly accident risk. The available traffic files do not contain the hourly counts needed for a traffic-adjusted hour or daylight curve.

5 Discussion

5.1 Interpretation

Strong mean wind is over-represented at the times of rural injury accidents relative to its local frequency. Results are standardised within weather station and season, and uncertainty is clustered by station. The result describes association rather than a per-vehicle causal effect. Moderate wind intervals fluctuate around one, while several upper intervals contain few accidents.

Traffic remains important for interpretation because the main curve cannot separate risk per vehicle from the number of vehicles exposed. The annual and daily analyses point in the same direction: observed traffic is lower when strong wind persists, while both traffic-based accident models give rate ratios above one. Both have important limitations. The annual model allocates seasonal traffic by wind frequency, and the selected-counter model starts from measured 24-hour traffic but estimates its distribution within the day. The latter covers 758 accidents. These results agree with the main finding but are not a national estimate based on traffic observed at each accident time.

The additional weather results are informative but less simple than the main wind result. Gust shows a clear upper-tail pattern in both O/E and matched-time comparisons, although it is closely related to mean wind. Temperature has good overall independent-match coverage but a non-monotonic result across intervals and methods. Both the O/E and estimated vehicle-kilometre analyses show an increase above 12°C, whereas the matched-time comparison does not. The wind estimate changes little when temperature is included in the same matched model. The matched daylight estimates are close to one with wide intervals. The adjusted time, daylight, and season comparisons concern injury severity, not accident occurrence. The severity model does not show higher serious-or-fatal severity at strong wind, which distinguishes occurrence from consequences among accidents. The formal seasonal interaction test is suggestive but does not provide strong evidence that the wind association differs by season.

The direction of the main result agrees with earlier studies comparing accident shares with the time spent in adverse weather Edwards (1994) and with the engineering evidence that cross-wind can impair vehicle stability Baker (1986, 1994). Its contribution is a longer Icelandic injury-accident series, local station-and-season standardisation, and independent matched-time and traffic checks rather than a new physical wind threshold. The non-monotonic temperature estimates are consistent with previous evidence that temperature associations can vary by range and season Lee et al. (2014); Zhan et al. (2020). The fall in daily traffic during sustained wind is also consistent with recorder-based evidence that adverse weather changes travel demand Sathiaraj et al. (2018). Earlier work helps interpret the results but does not remove the study's measurement and traffic limitations.

The serious-or-fatal and four-season models point in the same direction as the all-injury result. They add information without changing the main outcome or weather definition. Sparse extreme-wind counts, especially the four serious-or-fatal accidents in the at-least-25 m/s interval, preclude precise comparison of effect sizes across outcomes or seasons. The coarse traffic models also show upper-wind rate ratios above one for both vehicle-count groups. The estimate is larger for multiple-vehicle accidents, but separately fitted subgroup estimates are not a formal comparison and do not identify the underlying collision mechanism.

The O/E and traffic-model estimates are not competing versions of the same number. O/E compares accident occurrence with the amount of time each wind interval is observed, using 6,192 matched accidents. The conditional model compares estimated accident rates within road section, year, and traffic period and uses 4,958 accidents with the required traffic links and positive estimated vehicle-kilometres. Its larger upper-bin estimate is compatible with traffic falling during strong wind, but it also depends on allocated rather than directly observed 10-minute traffic. The agreement in direction is more informative than the difference in magnitude.

5.2 Strengths

The main strengths are the large 2007–2025 accident sample, 10-minute weather resolution, explicit spatial coverage reporting, local wind-frequency standardisation, and station-clustered bootstrap intervals. A separately specified time-stratified analysis controls station and recurring calendar time, while the traffic analyses examine the limitation caused by unavailable traffic at the accident time. The matching data include unmatched accidents and record the reason for each unsuccessful match. The fixed hierarchy keeps the connection between the research question, method, and result clear.

The empirical contribution is a quantified comparison of Icelandic rural injury accidents with local weather frequency and the available traffic data. The computational contribution is an auditable pipeline that preserves source identifiers, records exclusions and match coverage, separates large source preparation from compact analysis CSV files, and generates the reported tables and figures from code. Automated validation checks the main sample sizes, definitions, and numerical results. This implementation makes the analytical claims inspectable without treating software organisation itself as a research result.

5.3 Limitations

- The main result is not traffic-adjusted. It should not be interpreted as accident risk per vehicle-kilometre.
- The case-crossover analysis controls recurring calendar time but not unusual traffic, road conditions, visibility, or closures on a particular day. Its ≥ 15 m/s category summarises the upper-wind pattern rather than a physical threshold.
- A weather station up to 20 km away is a proxy for conditions at the accident location. Terrain can produce important differences over shorter distances.

- The stratified crash-rate analysis represents 4,958 accidents and uses annual seasonal traffic allocated by wind frequency, rather than traffic observed at the accident minute. It aligns accident and road-section weather to the same station, but excludes accidents for which that station is farther than 20 km from the accident.
- The temperature vehicle-kilometre model uses 3,136 accidents with valid temperature at the road-assigned weather station. This is less than the independently matched temperature sample because the numerator and denominator are required to use the same traffic-model station.
- Daily counter data cover 2019–2024. The duration analysis relates the observed 24-hour total to hours of strong wind; it does not observe traffic separately during those hours.
- Daily traffic counts cover selected counter sites. Multiple counters can represent different directions, lanes, or locations; keeping counters separately avoids double counting but does not provide national coverage.
- The allocated daily-rate model includes 758 accidents with an exact road-section counter link and valid counter-day. It assumes the observed daily traffic is distributed across wind intervals in proportion to valid ten-minute observations. This is an estimated within-day split, not observed hourly traffic. The accident-time wind and denominator now use the same station, within 20 km of both the accident and counter, but the accident vehicle need not have passed the assigned counter.
- The 07:00–24:00 daily check assumes zero traffic outside that interval and uniform traffic within it. This is deliberately an assumption check, not a reconstruction of hourly traffic.
- Estimated rates are restricted to rural injury accidents on linked road sections. They should not be compared directly with broad national or international accident rates unless the outcome and vehicle-kilometre traffic quantity are defined in the same way.
- The highest wind intervals contain relatively few accidents. Several intervals and comparison results are shown, so individual estimates in the upper tail should be interpreted with caution.
- Fixed 2020–2024 urban boundaries are applied to the entire 2007–2025 accident period.
- The analysis is observational. Unmeasured road condition, vehicle type, speed, visibility, and driver behaviour can contribute to the pattern.

5.4 Further Work

The most valuable additional data would be verified hourly traffic counts with counter coordinates, stable road-section identifiers, lane and direction metadata, and documented downtime. Linking those counts to the same weather stations would provide genuine hourly traffic for accident and control times. Daily totals cannot recover that information, so further modelling of the present totals would not solve this limitation. With hourly data, a future analysis could distinguish vehicle classes, wind direction relative to the road, and road geometry. Better traffic data would add more value than additional models based on the current information.

6 Conclusion

Question 1 asked for frequency-standardised mean-wind estimates. Of 6,414 rural injury accidents during 2007–2025, 6,192 were matched to valid wind within 20 km and five minutes. At 20–25 m/s, 61 accidents were observed compared with 29.0 expected, giving O/E 2.11 with a 95% station-clustered interval of 1.54–2.73. The sparse category at 25 m/s or above had O/E 2.49, but its interval of 0.86–5.37 prevents a separate precise conclusion.

Question 2 asked for gust and temperature estimates. Accident-time gust showed a clear upper-tail pattern: at 35 m/s or above, O/E was 5.06, and the matched odds ratio at 30 m/s or above was 3.21 relative to 0–10 m/s. Temperature was available for 5,707 accidents and was non-monotonic. The matched mean-wind odds ratio for at least 15 versus 0–5 m/s changed only from 1.61 to 1.60 when temperature was included. Temperature O/E was 2.17 at 15°C or above, and the estimated vehicle-kilometre model gave a rate ratio of 2.00 relative to 0–3°C. The matched-time estimate for the same warm interval was 1.07 with an interval including one. The warm-temperature result depends on the method and should be interpreted cautiously.

Question 3 asked about daylight and seasonal differences. Relative to daylight, the matched odds ratio was 1.14 for darkness and 1.10 for civil twilight, with both intervals including one. The wind-by-season interaction test gave $p = 0.072$, which does not provide strong evidence that the wind association differs by season.

Question 4 asked about injury severity. Among accidents with complete weather data, mean wind of at least 15 m/s had an adjusted severity odds ratio of 0.95 relative to 0–10 m/s. For time of day, 06:00–10:00 had a severity odds ratio of 0.67 relative to 10:00–16:00. Thus, the data do not show clearly higher serious-or-fatal severity during strong wind, and every estimate in this model is conditional on a recorded injury accident.

Question 5 asked what the available traffic data add. The annual-traffic model gave a rate ratio of 2.38 at 20–25 m/s relative to 0–5 m/s. At selected daily counters, traffic fell to 88.9% of its calendar expectation on days with at least six hours of mean wind at or above 15 m/s. The allocated daily-counter model gave a rate ratio of 3.34 at 15 m/s or above relative to 0–10 m/s. These traffic estimates have the same direction as the main result, but traffic within each wind interval is estimated rather than observed directly. Separate coarse annual-traffic models gave upper-wind rate ratios of 1.39 for one-vehicle accidents and 2.33 for accidents involving two or more vehicles; these subgroup estimates are descriptive rather than a formal difference test.

The main conclusion is a quantified association between strong mean wind and higher relative occurrence of rural injury accidents in Iceland. It is not a causal estimate or a complete national risk per vehicle. Better linked hourly traffic data are required to estimate directly observed road risk per vehicle.

Bibliography

- Ahmed, M. M., Abdel-Aty, M., and Yu, R. (2012). Assessment of interaction of crash occurrence, mountainous freeway geometry, real-time weather, and traffic data. *Transportation Research Record*, 2280(1), 51–59. <https://doi.org/10.3141/2280-06>.
- Andrey, J., Mills, B., Leahy, M., and Suggett, J. (2003). Weather as a chronic hazard for road transportation in Canadian cities. *Natural Hazards*, 28, 319–343.
- Baker, C. J. (1986). A simplified analysis of various types of wind-induced road vehicle accidents. *Journal of Wind Engineering and Industrial Aerodynamics*, 22(1), 69–85. [https://doi.org/10.1016/0167-6105\(86\)90012-7](https://doi.org/10.1016/0167-6105(86)90012-7).
- Baker, C. J. (1994). The quantification of accident risk for road vehicles in cross winds. *Journal of Wind Engineering and Industrial Aerodynamics*, 52, 93–107. [https://doi.org/10.1016/0167-6105\(94\)90041-8](https://doi.org/10.1016/0167-6105(94)90041-8).
- Edwards, J. B. (1994). Wind-related road accidents in England and Wales 1980–1990. *Journal of Wind Engineering and Industrial Aerodynamics*, 52, 293–303. [https://doi.org/10.1016/0167-6105\(94\)90055-8](https://doi.org/10.1016/0167-6105(94)90055-8).
- Hagstofa Íslands. (2026). Urban-locality geographic data, 2020–2024. <https://gis.is/geoserver/Hagstofan/ows>.
- Hrafnkelsdóttir, E. (2020). *Effects of wind on vehicles: Development of a calculation model* (in Icelandic). Vegagerðin research report 1800-707-2. <https://www.vegagerdin.is/vegagerdin/gagnasafn/skyrslur/utgefnar-rannsoknaskyrslur/umferd/2020-umferd/ahrif-vinds-a-farartaeki-throun-reiknilikans/>.
- Johansson, Ö., Wanvik, P. O., and Elvik, R. (2009). A new method for assessing the risk of accident associated with darkness. *Accident Analysis & Prevention*, 41(4), 809–815. <https://doi.org/10.1016/j.aap.2009.04.003>.
- Janes, H., Sheppard, L., and Lumley, T. (2005). Case-crossover analyses of air pollution exposure data: Referent selection strategies and their implications for bias. *Epidemiology*, 16(6), 717–726. <https://doi.org/10.1097/01.ede.0000181315.18836.9d>.
- Lord, D. and Mannering, F. (2010). The statistical analysis of crash-frequency data: a review and assessment of methodological alternatives. *Transportation Research Part A*, 44(5), 291–305. <https://doi.org/10.1016/j.tra.2010.02.001>.
- Lee, W.-K., Lee, H. A., Hwang, S.-S., Kim, H., Lim, Y.-H., Hong, Y.-C., Ha, E.-H., and Park, H. (2014). A time series study on the effects of cold temperature on road traffic injuries in Seoul, Korea. *Environmental Research*, 132, 290–296. <https://doi.org/10.1016/j.envres.2014.04.019>.

- Theofilatos, A., and Yannis, G. (2014). A review of the effect of traffic and weather characteristics on road safety. *Accident Analysis & Prevention*, 72, 244–256. <https://doi.org/10.1016/j.aap.2014.06.017>.
- Peng, R. D. (2011). Reproducible research in computational science. *Science*, 334(6060), 1226–1227. <https://doi.org/10.1126/science.1213847>.
- Pu, Y., Chen, F., Chen, P., and Pan, X. (2018). Wind data collection and analysis of topographical features along a highway for traffic safety assessment based on mobile mapping technology. *Transportation Research Record*, 2672(42), 292–301. <https://doi.org/10.1177/0361198118788465>.
- Samgöngustofa. (2026). Traffic accident statistics. <https://www.samgongustofa.is/umferd/tolfraedi/umferdarslys/>.
- Sathiaraj, D., Punkasem, T.-O., Wang, F., and Seedah, D. P. K. (2018). Data-driven analysis on the effects of extreme weather elements on traffic volume in Atlanta, Georgia, USA. *Computers, Environment and Urban Systems*, 72, 212–220. <https://doi.org/10.1016/j.compenvurbsys.2018.06.012>.
- Snæbjörnsson, J. Th., Baker, C. J., and Sigbjörnsson, R. (2007). Probabilistic assessment of road vehicle safety in windy environments. *Journal of Wind Engineering and Industrial Aerodynamics*, 95(9–11), 1445–1462. <https://doi.org/10.1016/j.jweia.2007.02.020>.
- Veðurstofa Íslands. (2026). Weather observations and data services. <https://api.vedur.is/weather/>.
- Vegagerðin. (2026). Traffic statistics. <https://www.vegagerdin.is/samgongukerfid/vegakerfid/umferdartolur>.
- Washington, S., Karlaftis, M., Mannering, F., and Anastasopoulos, P. (2020). *Statistical and Econometric Methods for Transportation Data Analysis*. CRC Press.
- Xing, F., Huang, H., Zhan, Z. Y., Zhai, X., Ou, C., Sze, N. N., and Hon, K. K. (2019). Hourly associations between weather factors and traffic crashes: Non-linear and lag effects. *Analytic Methods in Accident Research*, 24, 100109. <https://doi.org/10.1016/j.amar.2019.100109>.
- Zhan, Z.-Y., Yu, Y.-M., Chen, T.-T., Xu, L.-J., and Ou, C.-Q. (2020). Effects of hourly precipitation and temperature on road traffic casualties in Shenzhen, China (2010–2016): A time-stratified case-crossover study. *Science of the Total Environment*, 720, 137482. <https://doi.org/10.1016/j.scitotenv.2020.137482>.
- Young, R. K., and Liesman, J. (2007). Estimating the relationship between measured wind speed and overturning truck crashes using a binary logit model. *Accident Analysis & Prevention*, 39(3), 574–580. <https://doi.org/10.1016/j.aap.2006.10.002>.

A Supporting Analyses

These figures describe the study population, check the main wind pattern, or examine the traffic data. Unless stated otherwise, they are descriptive; sparse bars are shown in grey and their observed accident counts are printed on the bars.

A.1 Accident Characteristics

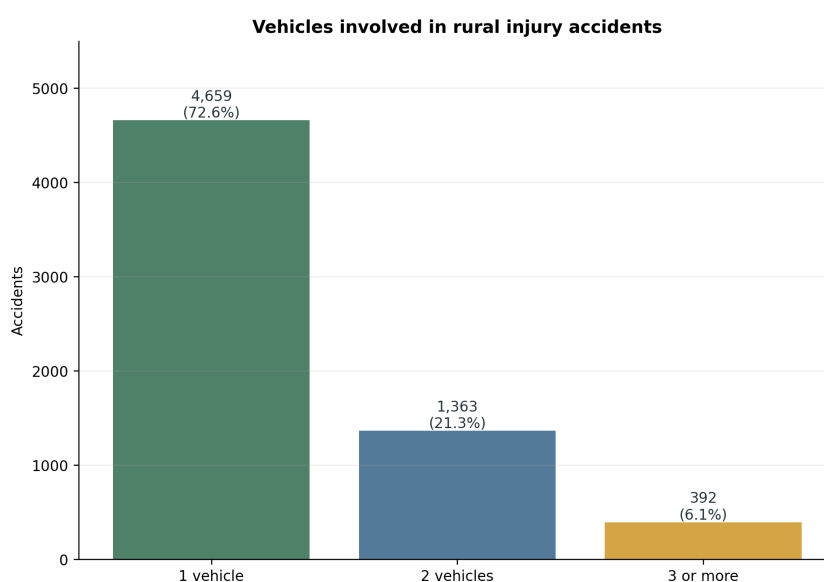


Figure A.1: Number of registered vehicles involved in the 6,414 rural injury accidents. Most selected accidents involved one registered vehicle.

A.2 Wind Gust Distance Check

Table A.1: Highest-gust result under three weather-station distance limits

Maximum distance	Matched accidents	Observed at ≥ 35	O/E	95% interval
10 km	4,858	28	6.12	3.58–9.26
20 km (primary)	6,192	28	5.06	2.94–7.57
30 km	6,399	29	5.00	2.95–7.45

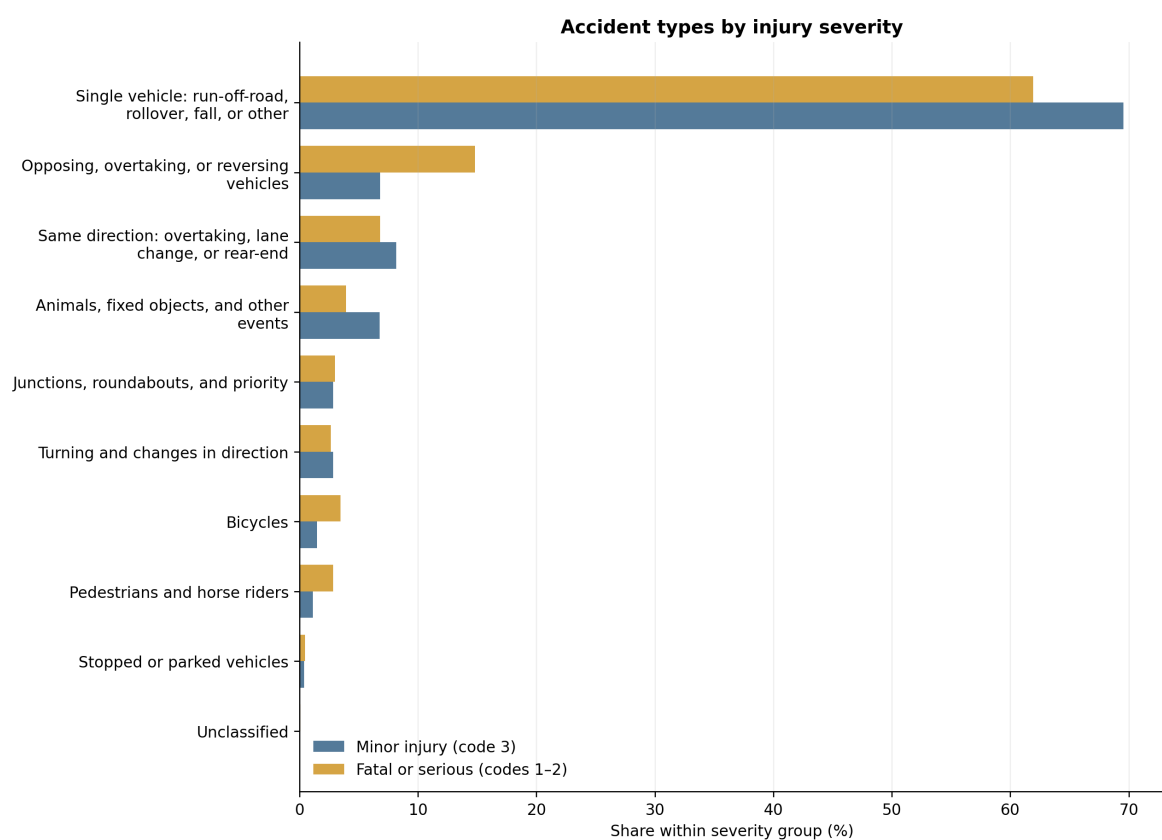


Figure A.2: Accident-type composition in minor-injury accidents and in the non-overlapping fatal-or-serious group. Percentages sum to 100 within each severity group.

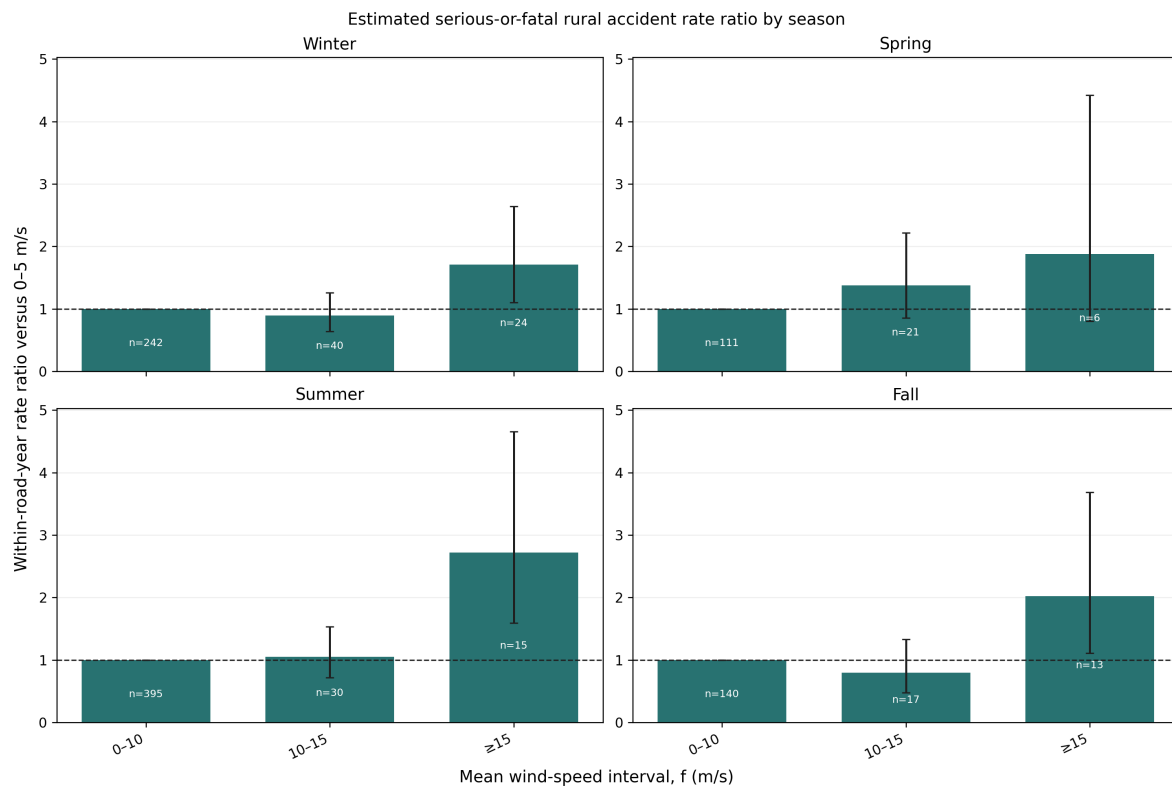


Figure A.3: Estimated serious-or-fatal accident rate ratios by season using coarse mean-wind intervals. The spring upper category contains six accidents, so the estimates show direction and uncertainty rather than precise differences between seasons.

A.3 Mean-Wind Subgroups

A.4 Raw Condition Counts, Temperature by Season, and Adjusted Severity

A.5 Daily-Counter Validation

Table A.2: Counter-location construction and independent coordinate check

Check	Result
Counter-site years in analysis location table	2,332
Counter-site years located from road geometry	2,325
Distinct located counter sites	473
Sites matched to an official 20 m road-station point within 10 m	435
Median / 90th-percentile coordinate difference	5.0 / 9.0 m

Coordinates are interpolated from the reported road station along official road geometry and remain labelled as estimates. The separate 20 m point match tests the interpolation; it does not replace the estimated location.

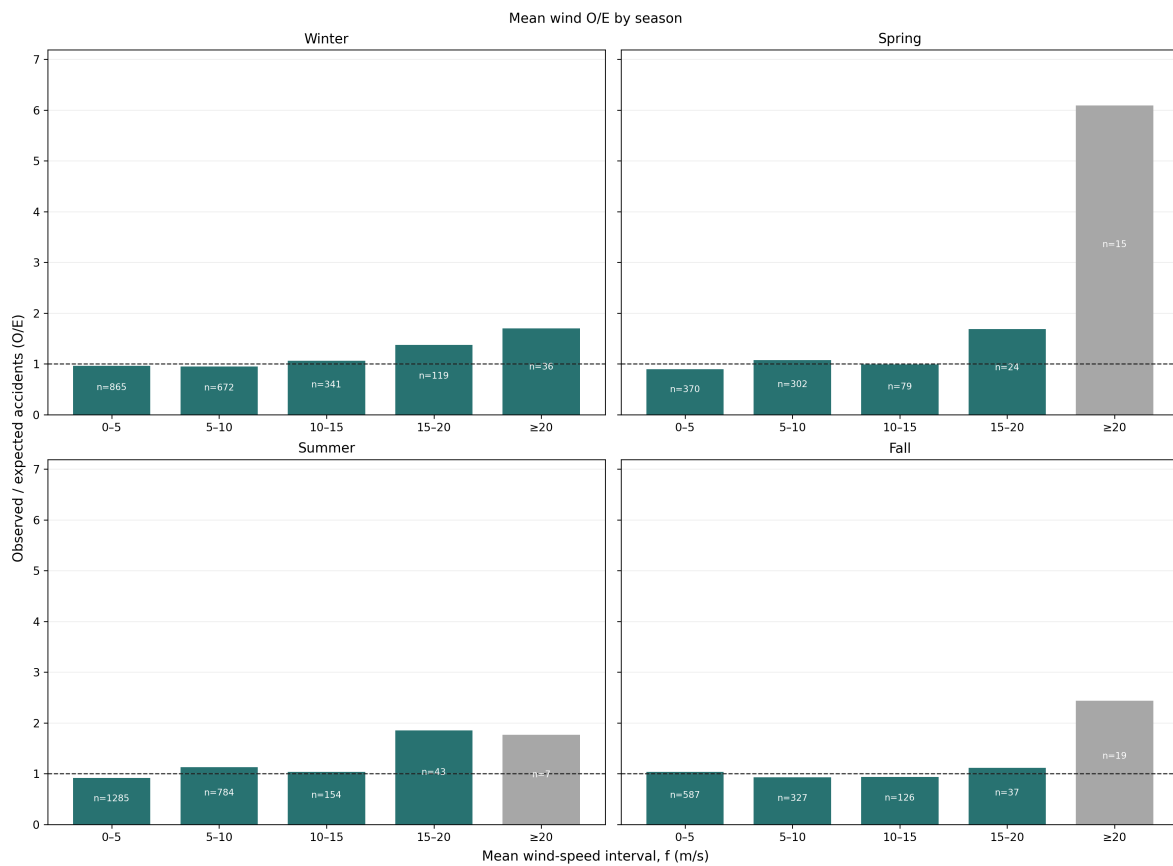


Figure A.4: Mean-wind O/E estimates by study season. These estimates are shown as a descriptive subgroup analysis; high-wind bins are sparse after the sample is divided by season. All panels share one vertical scale; grey bars contain fewer than 20 accidents.

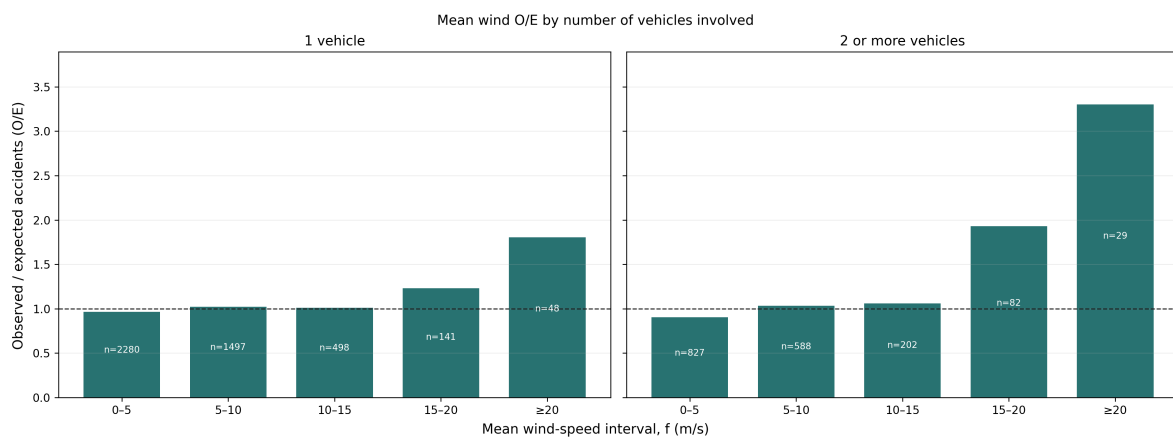


Figure A.5: Mean-wind O/E estimates by the number of registered vehicles involved. This is a descriptive subgroup analysis; it does not establish accident type or vehicle count as an explanatory variable. Both panels share one vertical scale; grey bars contain fewer than 20 accidents.

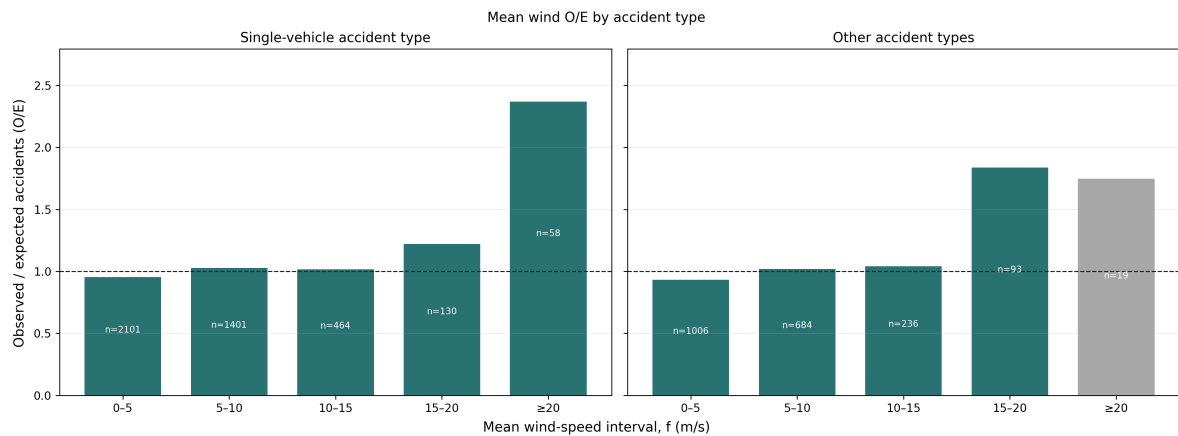


Figure A.6: Mean-wind O/E estimates for single-vehicle run-off-road, rollover, fall, or other events and for all other accident types. At least 20 m/s, the combined O/E is 2.37 for the single-vehicle family and 1.75 for other types. The figure is descriptive and is not a formal test of interaction.

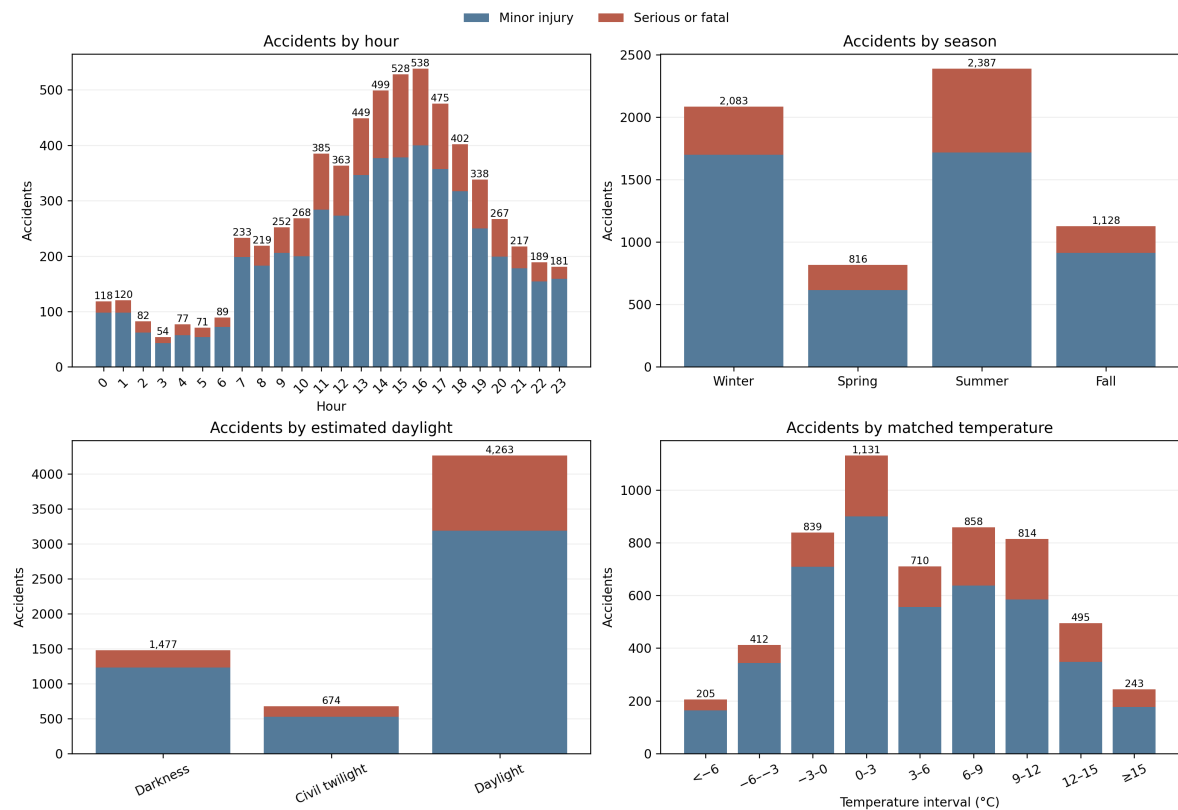


Figure A.7: Raw counts of rural injury accidents by recorded hour, season, estimated daylight, and matched temperature, divided into minor-injury and serious-or-fatal accidents. Labels give total accidents. Hour, season, and daylight use all 6,414 accidents; temperature uses the 5,707 qualifying matches. These panels describe the sample and do not estimate risk.

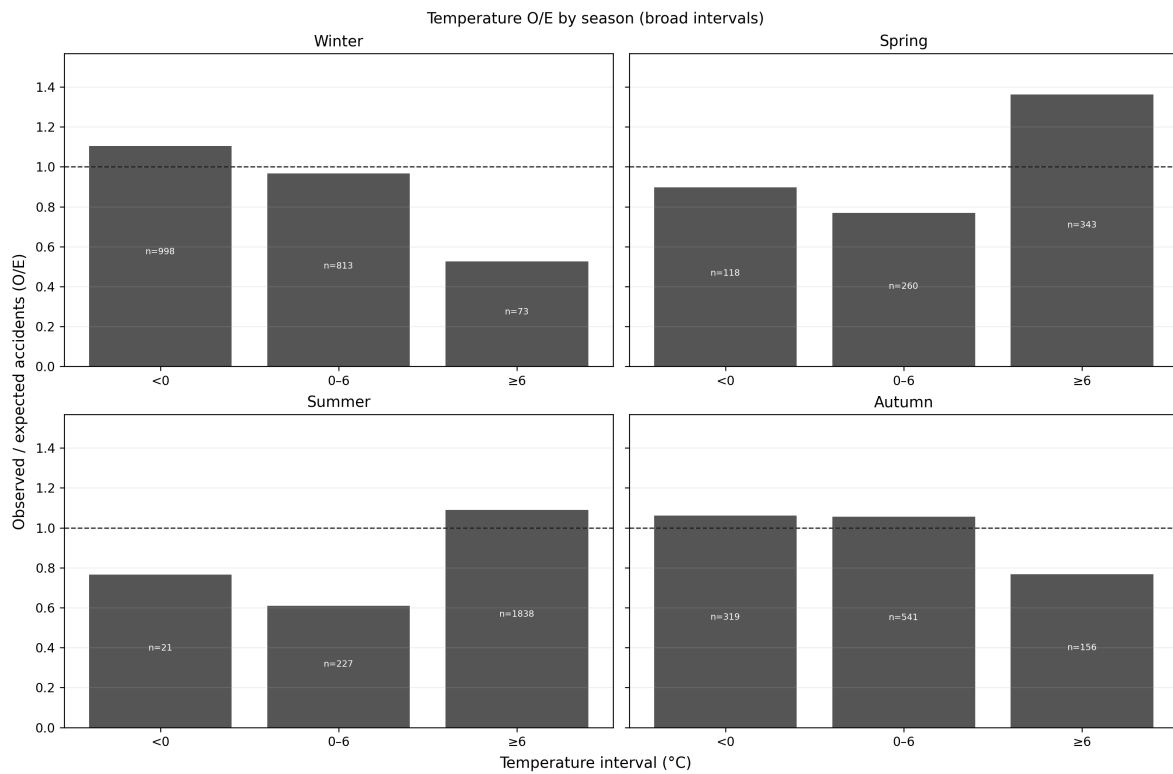


Figure A.8: Temperature O/E by season using three broad intervals formed by summing the fixed temperature bins. The changing direction between seasons shows why the pooled temperature result should be interpreted cautiously. Labels are observed accidents.

Table A.3: Consistency of observed daily PDF traffic with official ADU

Data included	<i>N</i>	Median	P10–P90	$r_{\log}$
All exact matches	2,328	0.975	0.245–1.115	0.942
At least 300 observed days	1,906	0.984	0.240–1.063	0.940
At least 300 days, one counter per section	1,122	1.000	0.925–1.112	0.993

A.6 Full-Day-Mean Daily-Counter Check

Table A.4: Selection of accidents for the observed daily-counter analysis

Selection step	Accidents	Share of 2019–2024 sample
Rural injury accidents in 2019–2024	1,863	100.0%
Exact road-section/year counter candi-date	864	46.4%
Assigned counter within 20 km	863	46.3%
Positive count and valid full-day wind	767	41.2%

The main loss occurs because many accident road sections have no daily counter record for the same year. Distance excludes only one additional candidate at 20 km; a further 96 accidents


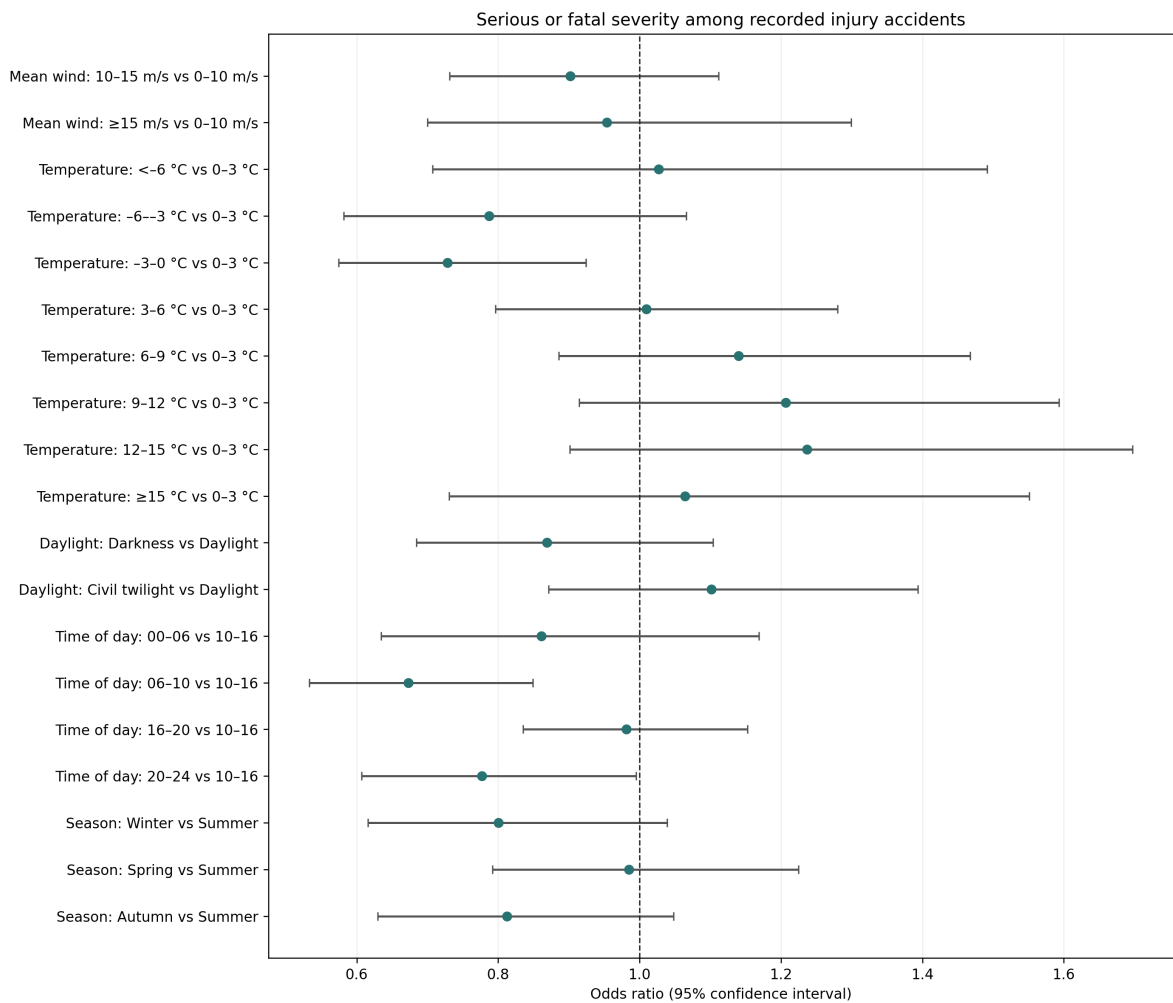


Figure A.9: Adjusted odds of serious-or-fatal rather than minor injury among 5,707 recorded injury accidents with complete wind and temperature matches. The model contains all displayed variables together. It describes severity conditional on an accident and does not estimate accident occurrence.

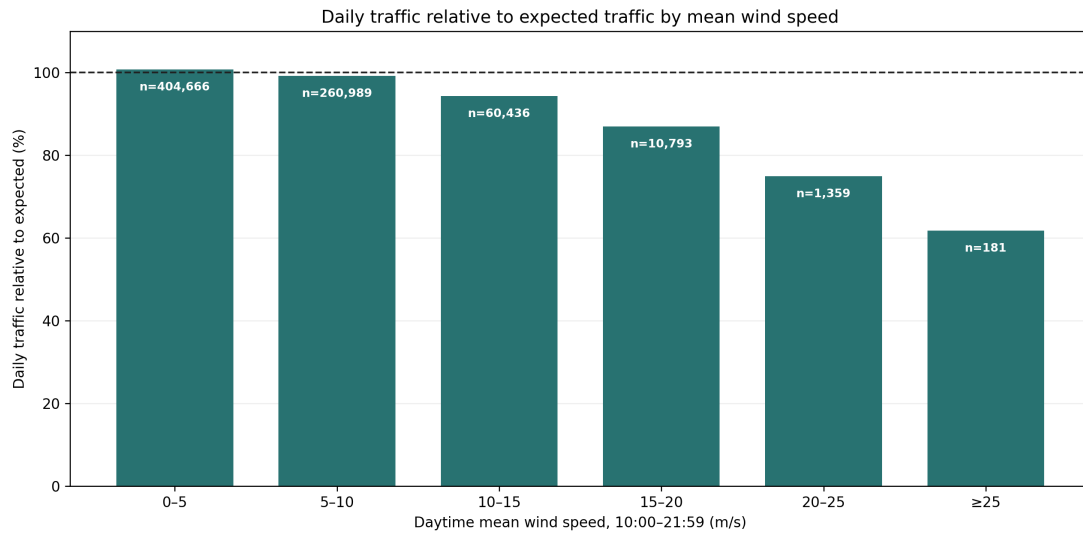

Expected daily traffic: mean for the same counter, year, month, and weekday. Wind is the mean from 10:00 to 21:59.

Figure A.10: Vehicles counted per day relative to a typical day at the same counter, year, month, and weekday. Labels show counter-days. Daytime mean wind is calculated from 10:00 to 21:59. The figure describes selected counter sites, not traffic across the national road network.

lack a positive counter count or valid full-day wind on the accident date. No accident is assigned across road sections merely to improve coverage.


Table A.5: Characteristics of accidents retained and excluded by the daily-counter linkage

Characteristic	All	No link	Linked, excluded	Retained
Accidents	1,863	999	106	758
Share of all accidents	100.0%	53.6%	5.7%	40.7%
Distinct road sections	563	374	59	189
Serious or fatal	25.6%	29.4%	17.9%	21.6%
One vehicle	67.7%	75.2%	54.7%	59.8%
Winter	32.6%	28.0%	41.5%	37.3%
Spring	13.0%	11.7%	8.5%	15.4%
Summer	36.0%	41.8%	33.0%	28.6%
Autumn	18.4%	18.4%	17.0%	18.6%

Table A.6: Reasons an exact same-year daily-counter link was unavailable

Reason	Accidents	Share of all accidents
Road section absent from daily-counter files	953	51.2%
Road section countered only in another year	41	2.2%
Historical counter location unavailable	5	0.3%

The selected sample reflects the geography and operating years of the counters; it is not a

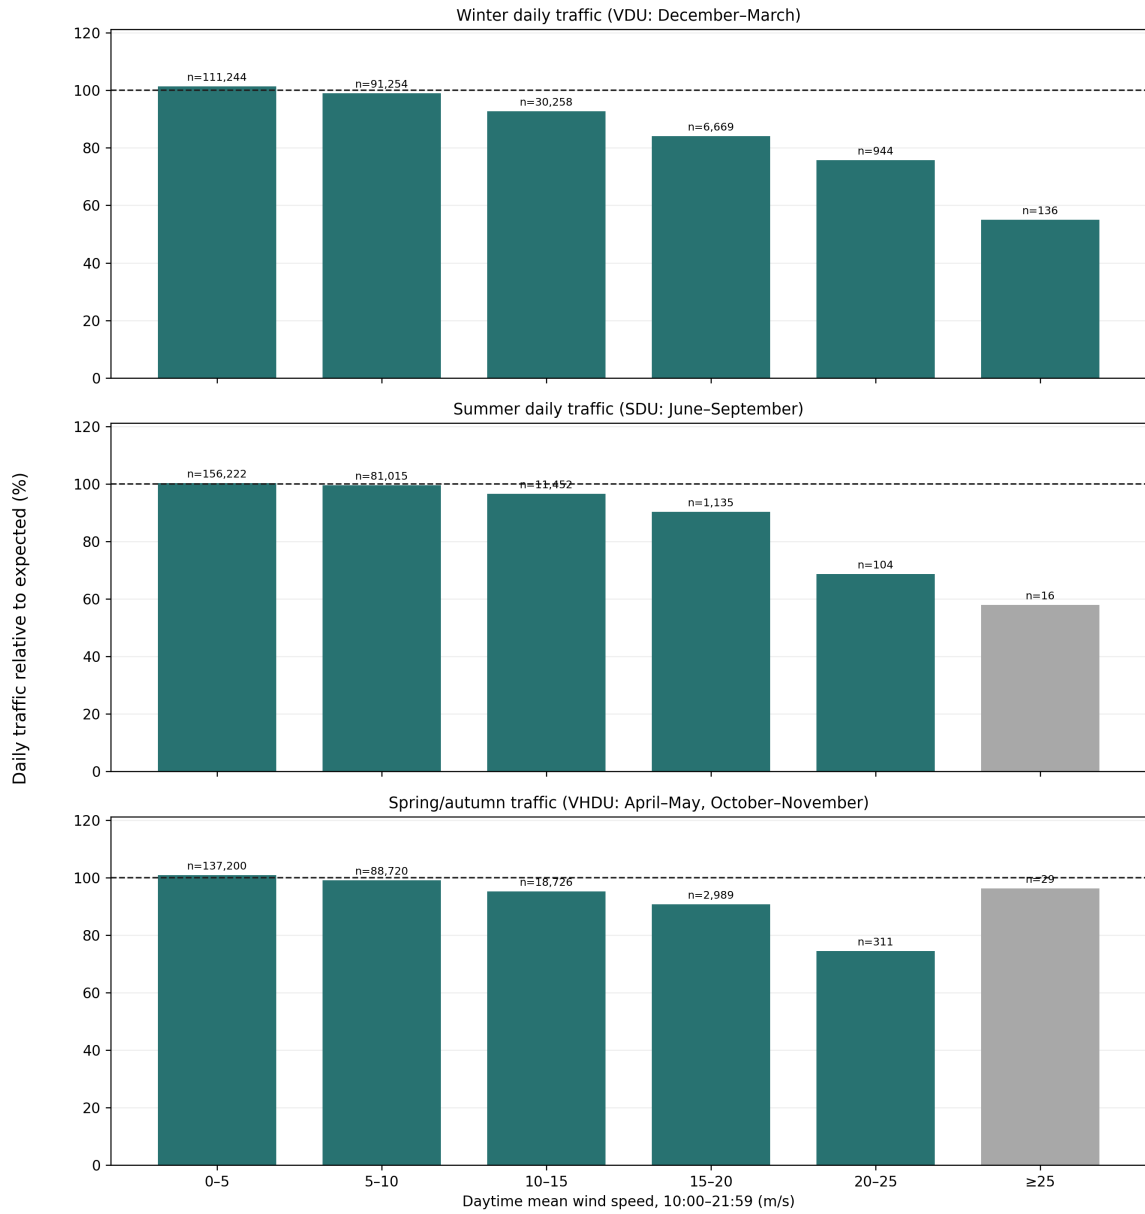

Expected traffic is standardized within counter, year, month, and weekday. Grey bars have fewer than 20 counter-days.

Figure A.11: Daily traffic relative to its calendar expectation by traffic period and daytime mean wind. The decline is present in VDU, SDU, and VH DU, although the highest interval contains only 136, 16, and 29 counter-days respectively. Grey bars contain fewer than 20 counters.

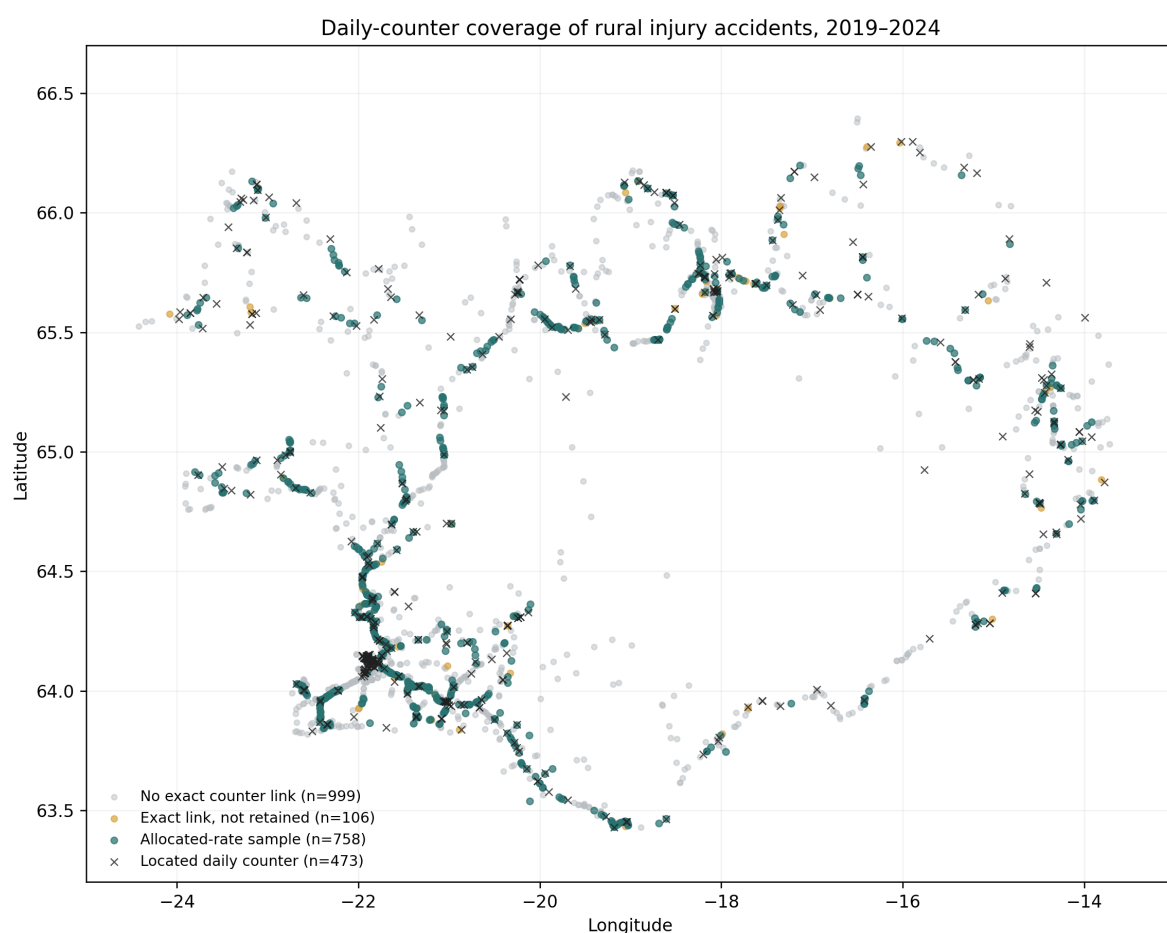


Figure A.12: Locations of the 1,863 rural injury accidents in 2019–2024 and the 473 located daily counters. Colours distinguish the 758 accidents included in the allocated-rate model, the 106 with an exact link but another exclusion, and the 999 without an exact same-year counter link. The map displays the geographic selectivity of the daily-counter sample; it is not a road-network rate map.

representative national sample. It contains fewer summer and serious-or-fatal accidents than the full 2019–2024 rural injury-accident set.

Table A.7: Detailed daily counter-based rural injury-accident rate comparison, 2019–2024

Mean wind	Accidents	Counted vehicles	Counters	Rate ratio (95% CI)
0–5 m/s	392	284,338,552	230	1.00 (reference)
5–10 m/s	273	164,417,740	230	1.05 (0.90–1.24)
10–15 m/s	88	29,868,420	230	1.71 (1.34–2.18)
15–20 m/s	12	2,719,300	176	2.42 (1.35–4.37)
20–25 m/s	1	80,251	64	4.29 (0.59–31.36)
≥25 m/s	1	3,578	6	171.08 (18.22–1,606.50)

The detailed table documents the standard wind intervals but is not used for upper-tail inference: the final two estimates are determined by one accident each and are extremely unstable. The coarse version combines the upper tail and gives a rate ratio of 2.42 (95% CI 1.38–4.24) for at least 15 m/s. Both versions use the same 767 accidents, exact road-section/year assignment within 20 km, and observed 24-hour traffic as the offset. Because a full-day mean does not represent conditions at the accident time, this is only a day-level check.

Table A.8: Upper daily-counter estimate under three assignment distances

Maximum distance	Included accidents	Upper-bin accidents	Rate ratio	95% CI
5 km	585	12	2.65	1.44–4.88
10 km	750	14	2.48	1.41–4.35
20 km	767	14	2.42	1.38–4.24

The estimate remains in the same direction under stricter distance rules. The wide intervals reflect the small number of accidents at full-day mean wind of at least 15 m/s; stability across radii does not remove that limitation.

A.7 Stratified Vehicle-Kilometre Model

Table A.9 gives descriptive absolute rates using estimated vehicle-kilometres from every eligible road section. Table A.10 compares the all-period conditional model with a model restricted to official VDU and SDU traffic periods. The latter excludes April–May and October–November, for which VHDU is derived from ADU, SDU and VDU.



Figure A.13: Estimated mean-wind rate ratios from separate one-vehicle and multiple-vehicle models. The upper category contains 150 and 97 accidents, respectively, in the upper category. Comparisons are within road section, year, and traffic period; error bars are 95% confidence intervals.

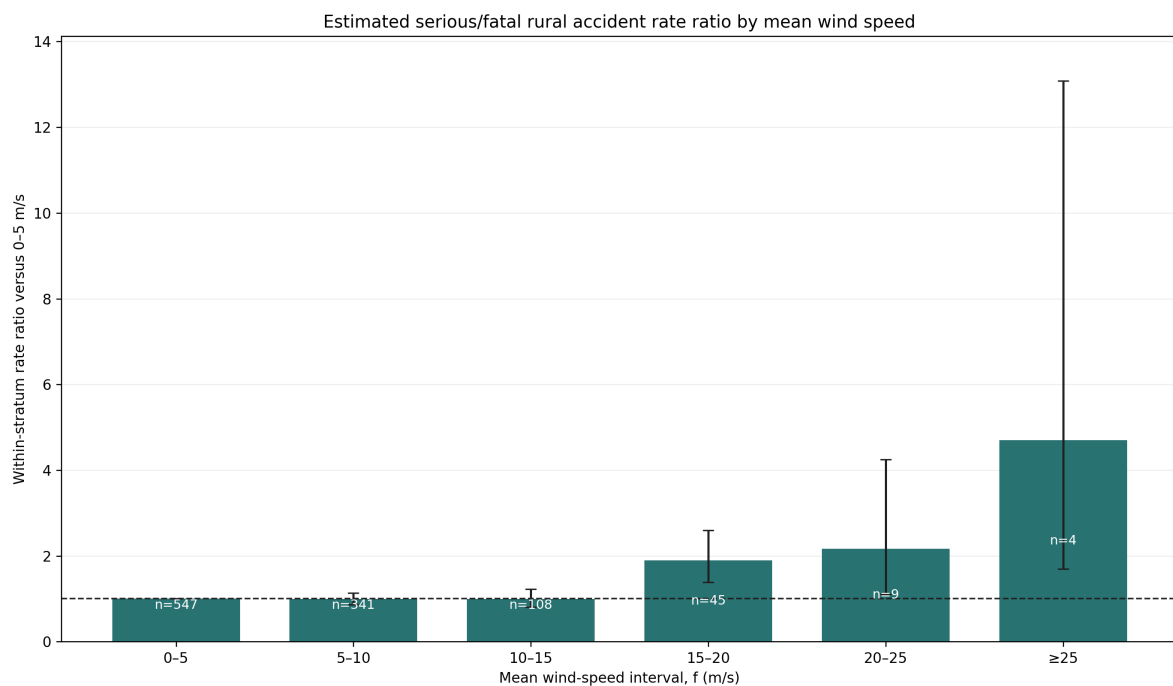


Figure A.14: Estimated serious-or-fatal rural accident rate ratios by mean wind. The model compares wind intervals within the same road section, year, and traffic period. Labels show observed accidents. The four accidents in the highest interval make that estimate imprecise.

Table A.9: Estimated rural injury-accident rate by mean wind speed, all traffic periods

Mean wind	Accidents	Estimated accidents per 100 million vehicle-km
0–5	2,435	8.5
5–10	1,706	13.2
10–15	570	16.4
15–20	182	27.3
20–25	48	43.0
≥25	17	57.2

Table A.10: Conditional rate ratios in the upper mean-wind intervals: all periods versus official VDU and SDU periods only

Mean wind	All periods	Official VDU+SDU only
15–20	1.59 (1.36–1.86), $n = 182$	1.67 (1.39–2.00), $n = 131$
20–25	2.38 (1.78–3.18), $n = 48$	1.93 (1.32–2.82), $n = 28$
≥25	4.49 (2.75–7.34), $n = 17$	2.52 (1.18–5.35), $n = 7$

Table A.11: Comparison and quality checks for the traffic analyses

Check	Data included	Estimate (95% interval)	Records
Rate model, 20–25 m/s	All VDU, SDU, and derived VH DU periods	RR 2.38 (1.78–3.18)	48 accidents
Rate model, 20–25 m/s	Official VDU and SDU periods only	RR 1.93 (1.32–2.82)	28 accidents
Rate model, ≥25 m/s	All VDU, SDU, and derived VH DU periods	RR 4.49 (2.75–7.34)	17 accidents
Rate model, ≥25 m/s	Official VDU and SDU periods only	RR 2.52 (1.18–5.35)	7 accidents
Daily traffic, 20–25 m/s	Retain zero counter-days	74.91% (67.16–80.47)	1,359 days
Daily traffic, 20–25 m/s	Exclude zero counter-days	75.18% (67.80–80.75)	1,275 days
Nonpositive published VDU	Excluded, not imputed	6.57% excluded	1,509 section-years
Nonpositive derived VH DU	Excluded, not imputed	2.40% excluded	552 section-years

Table A.12: Illustrative direction check using observed daily traffic response

Mean wind	Annual-model RR	Daily traffic	Illustrative RR
0–5	1.00	100.7%	1.00
5–10	1.10	99.2%	1.12
10–15	1.11	94.3%	1.18
15–20	1.59	86.9%	1.85
20–25	2.38	74.9%	3.20
≥25	4.49	61.8%	7.33

The last table is a deliberately illustrative calculation. “Daily traffic” is observed traffic as a percentage of the calendar-standardised expectation on days classified by full-day mean wind.

The illustrative rate ratio multiplies the annual-model rate ratio by the 0–5 m/s percentage divided by the percentage for the displayed interval. Because the daily data cover selected counters in 2019–2024 and do not contain traffic by ten-minute interval, these values are not corrected estimates or additional model results.

The two models agree that the rate ratio is higher from 15 m/s. The upper intervals differ because the official-only analysis excludes VH DU and has few accidents. It shows how the estimated rate depends on the estimated rate on the traffic-period assumption.

The four-season rate model is reported in the main results using wider wind intervals to avoid very small cells. A vehicle-group rate model is not reported because the upper intervals become too sparse for a balanced analysis. The descriptive O/E vehicle-group figure above shows the limited evidence available.