
JLG

OPERATOR MANUAL

Model 1930ES Electric Scissor Lift

Rev. B, March 2024

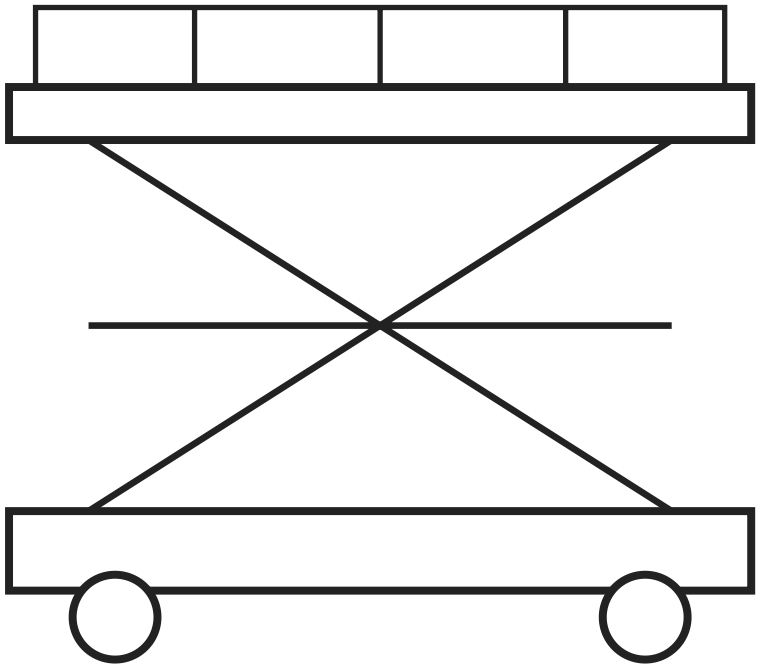

Keep with the machine	Store in the platform manual box
Pages in excerpt	4

1 Safety

WARNING

- Never exceed the rated platform capacity of 500 lb.
- Do not raise the platform on a slope or soft ground.
- Keep the guardrails closed and wear a harness where site rules require it.
- Stay 10 ft away from power lines.

WIND SPEED	USE
Up to 28 mph	Indoor and outdoor use allowed
Over 28 mph	Lower the platform, do not operate

2 Controls

CONTROL	FUNCTION
Key switch	Platform, off, ground
Emergency stop	Push to stop all functions
Lift / drive selector	Chooses the joystick function
Manual lowering knob	Lowers the platform with no power

Specifications

ITEM	VALUE
Working height	25 ft (7.62 m)
Platform height	19 ft (5.79 m)
Platform capacity	500 lb (227 kg)
Machine weight	3,280 lb (1,488 kg)
Drive power	24V DC, 4 batteries 6V 220 Ah
Hydraulic reservoir	1.3 gal (4.9 L)

3 Pre-start inspection

CHECK	PASS CONDITION
Battery charge	Indicator green
Hydraulic oil level	Between the marks, platform lowered
Hoses and fittings	No leaks or damage
Guardrails and gate	Secure, gate closes itself
Tires	No cuts or chunks missing
Emergency stop	Stops all functions

Report any failed check to your supervisor and tag the machine out of service.