
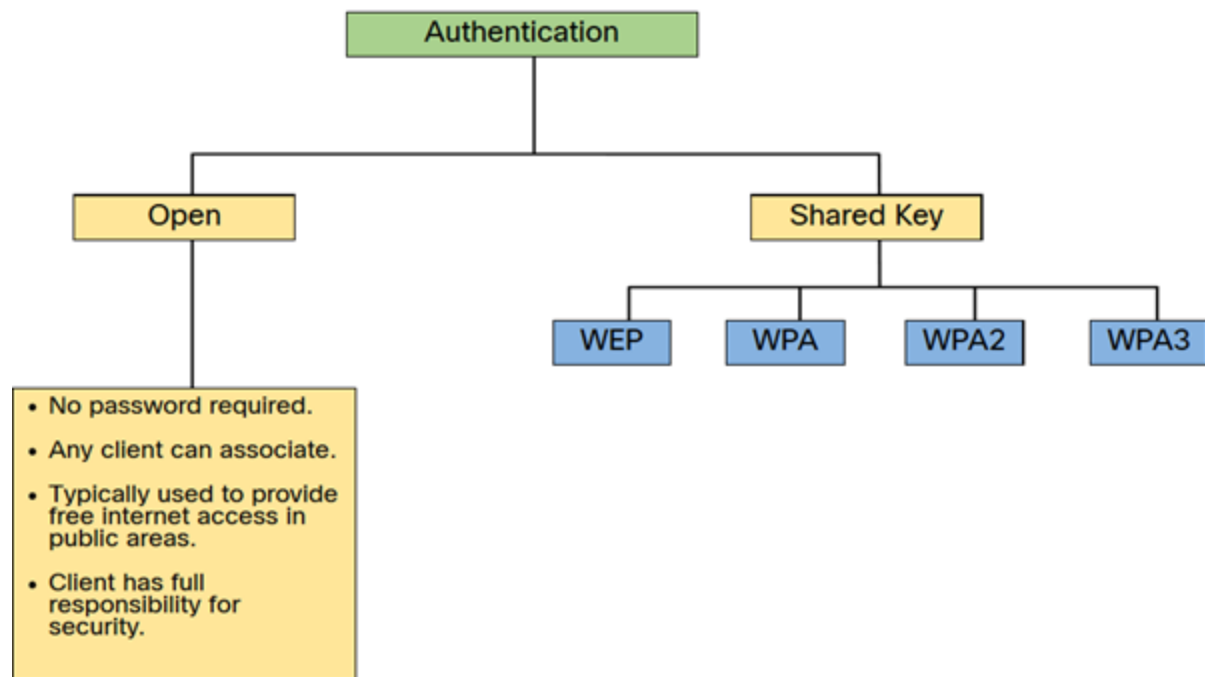


Wireless Security Features:

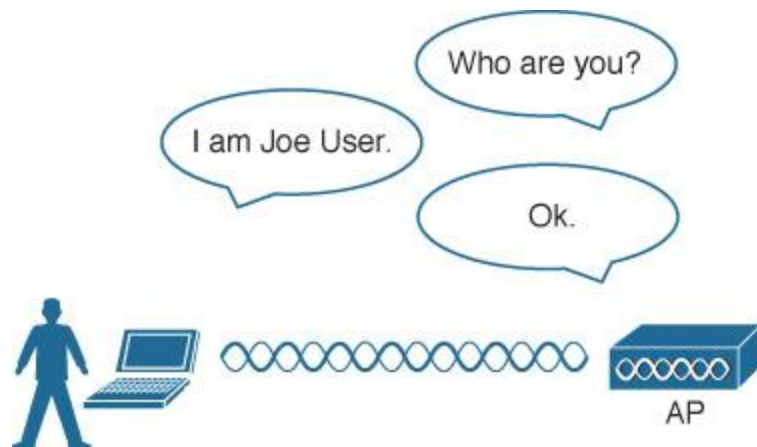

Authentication Method	Description
Open Authentication	It offers open access to a WLAN. The only requirement is that a client must use an 802.11 authentication request before it attempts to associate with an AP. No other credentials are needed. Open Authentication requires nothing from the user or the device.
Wired Equivalent Privacy (WEP)	The original 802.11 specification designed to secure the data using the Rivest Cipher 4 (RC4) encryption method with a static key. However, the key never changes when exchanging packets. This makes it easy to hack. WEP is no longer recommended and should never be used.
Wi-Fi Protected Access (WPA)	A Wi-Fi Alliance standard that uses WEP but secures the data with the much stronger Temporal Key Integrity Protocol (TKIP) encryption algorithm. TKIP changes the key for each packet, making it much more difficult to hack.
WPA2	WPA2 is the current industry standard for securing wireless networks. It uses the Advanced Encryption Standard (AES) for encryption. AES is currently considered the strongest encryption protocol.
WPA3	The next generation of Wi-Fi security. All WPA3-enabled devices use the latest security methods, disallow outdated legacy protocols, and require the use of Protected Management Frames (PMF). However, devices with WPA3 are not yet readily available.
Personal	Intended for home or small office networks, users authenticate using a pre-shared key (PSK). Wireless clients authenticate with the wireless router using a pre-shared password. No special authentication server is required.
Enterprise	Intended for enterprise networks but requires a Remote Authentication Dial-In User Service (RADIUS) authentication server. Although more complicated to set up, it provides additional security. The device must be authenticated by the RADIUS server and then users must authenticate using 802.1X standard, which uses the Extensible Authentication Protocol (EAP) for authentication.
802.1x EAP	The Extensible Authentication Protocol (EAP) is a layer 2 process that allows a wireless client to authenticate to the network. There are two varieties of EAP: one for wireless and one for LAN connections, commonly called EAP over LAN (EAPoL).
Web Authentication	Web Authentication (WebAuth) is different because it presents the end user with content to read and interact with before granting access to the network. It can also prompt for user credentials, display information about the enterprise, and so on. the user must open a web browser to see the WebAuth content.

General Security QoS Policy-Mapping Advanced

Layer 2 Layer 3 AAA Servers

Layer 2 Security [6](#) None Open Authentication

Fast Transition

Fast Transition Over the DS

Reassociation Timeout 20 Seconds

MONITOR **WLANs** CONTROLLER WIRELESS SECURITY MANAGEMENT COMMANDS HELP FEEDBACK

WLANs

Current Filter: None [\[Change Filter\]](#) [\[Clear Filter\]](#)

Create New ▼ Go

☐	WLAN ID	Type	Profile Name	WLAN SSID	Admin Status	Security Policies
☐	1	WLAN	test	test	Enabled	None

General **Security** QoS Policy-Mapping Advanced

Layer 2 Layer 3 AAA Servers

Layer 2 Security [6](#) WPA+WPA2

Protected Management

PMF

WPA+WPA2 Parameters

WPA Policy ☐

WPA2 Policy ☐

OSN Policy ☐

Authentication Key Management [19](#)

☐

802.1X ☐ Enable

CKM ☐ Enable

PSK ☐ Enable

WPA gtk-randomize State Disable ▼