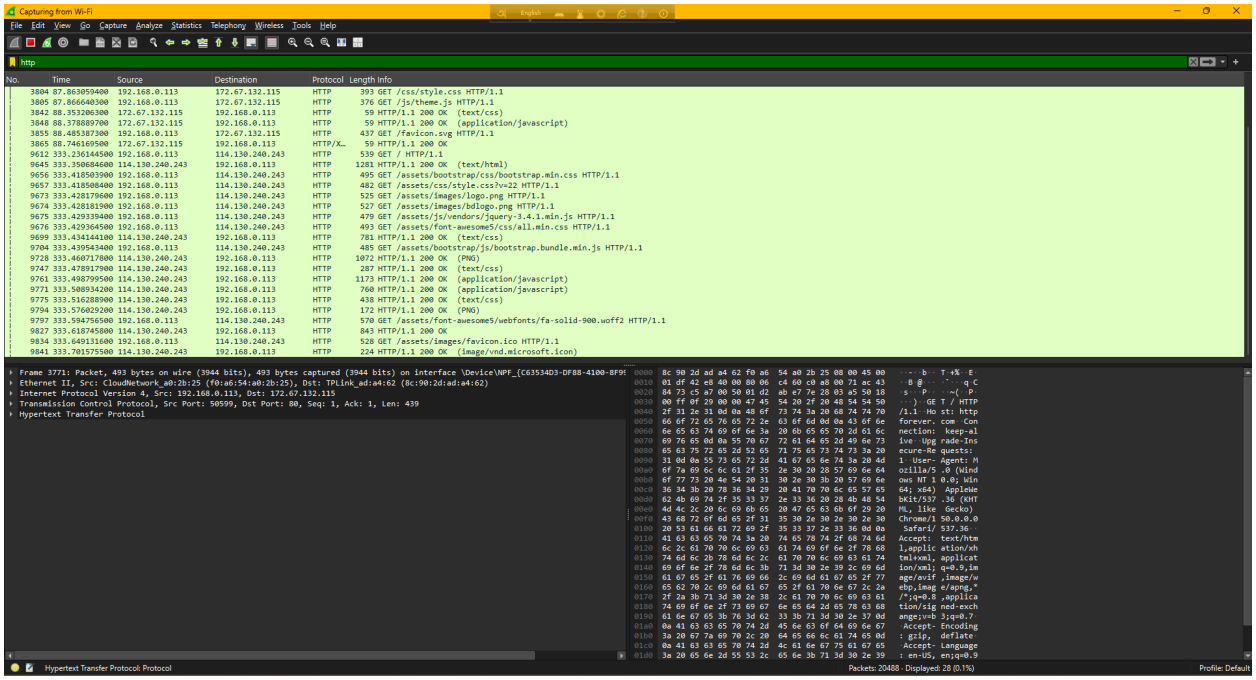


Wireshark packet capture window filtered for HTTP traffic, listing multiple HTTP GET requests and responses between the client (IP 192.168.0.113) and the server (IP 114.130.240.243). It serves as a high-level summary of the HTTP web session under analysis.


Request

```
Frame 9676: Packet, 493 bytes on wire (3944 bits), 493 bytes captured (3944 bits) on interface \Device\NPF_{C63534D3-DF88-4100-8F9
    Section number: 1
  ▸ Interface id: 0 (\Device\NPF_{C63534D3-DF88-4100-8F99-EDC06FDA7149})
    Encapsulation type: Ethernet (1)
    Arrival Time: Jul 19, 2026 21:00:35.103306300 Bangladesh Standard Time
    UTC Arrival Time: Jul 19, 2026 15:00:35.103306300 UTC
    Epoch Arrival Time: 1784473235.103306300
    [Time shift for this packet: 0.000000000 seconds]
    [Time delta from previous captured frame: 25.100 microseconds]
    [Time delta from previous displayed frame: 25.100 microseconds]
    [Time since reference or first frame: 5 minutes, 33.429364500 seconds]
    Frame Number: 9676
    Frame Length: 493 bytes (3944 bits)
    Capture Length: 493 bytes (3944 bits)
    [Frame is marked: False]
    [Frame is ignored: False]
    [Protocols in frame: eth:ethertype:ip:tcp:http]
    Character encoding: ASCII (0)
    [Coloring Rule Name: HTTP]
    [Coloring Rule String: http || tcp.port == 80 || http2]
```


The physical layer details of the client's HTTP request (Frame 9676). It details metadata such as the exact arrival timestamp, the total frame length of 493 bytes (3944 bits) captured on wire, and the network interface parameters.

```
Ethernet II, Src: CloudNetwork_a0:2b:25 (f0:a6:54:a0:2b:25), Dst: TPLink_ad:a4:62 (8c:90:2d:ad:a4:62)
  ▸ Destination: TPLink_ad:a4:62 (8c:90:2d:ad:a4:62)
  ▸ Source: CloudNetwork_a0:2b:25 (f0:a6:54:a0:2b:25)
    Type: IPv4 (0x0800)
    [Stream index: 0]
```


The data-link layer (Ethernet II) of the HTTP request packet. It highlights the MAC address of the source client interface (0c:84:dc:22:98:98) and the destination next-hop router MAC address (00:1c:c4:40:9e:3a).

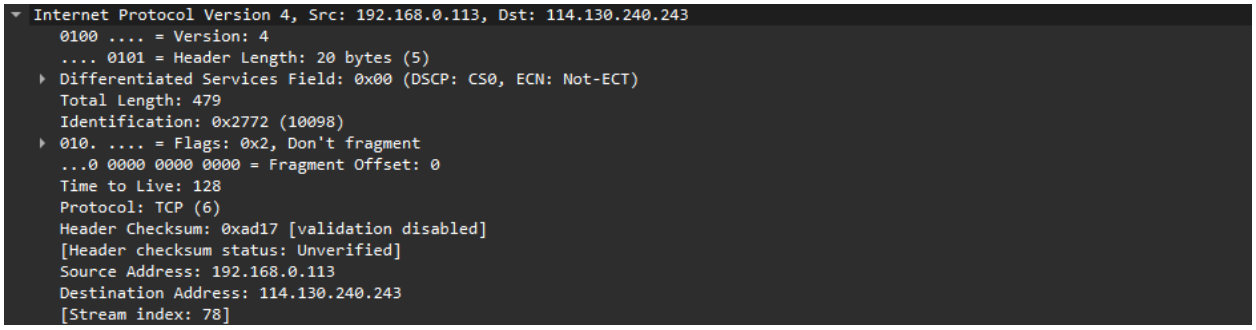

The IPv4 header of the client's HTTP request packet. It identifies the client source IP address (192.168.0.113), the server destination IP address (114.130.240.243), time to live (TTL), and protocol (TCP) parameters.

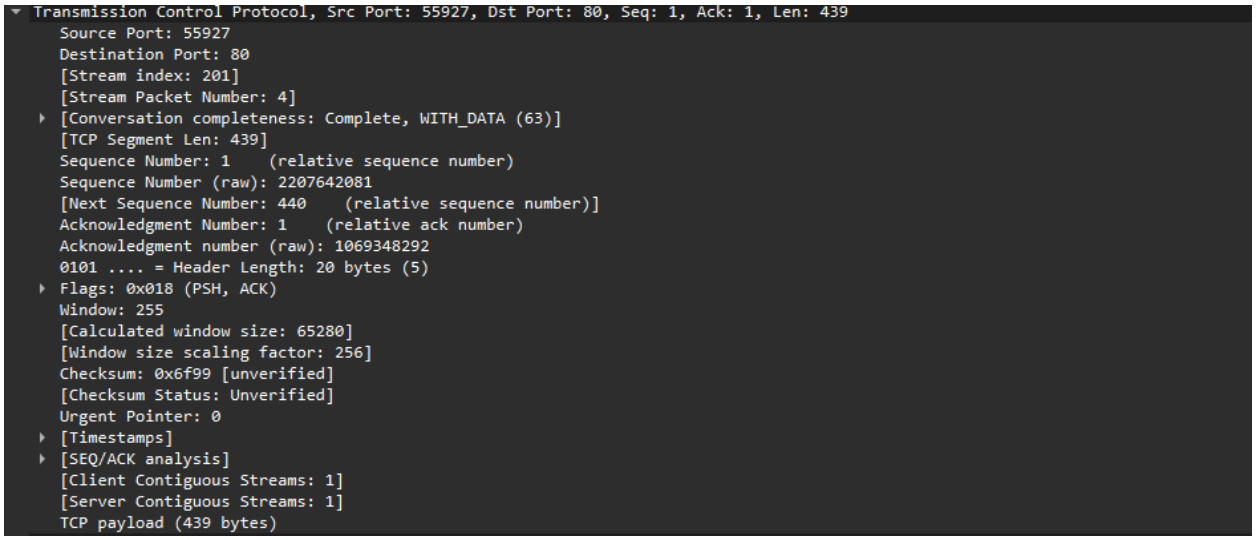


Transmission Control Protocol (TCP) header for the request. It displays the client source port (55927), server destination port (80 for HTTP), packet sequence and acknowledgment numbers, TCP window size, and flags.

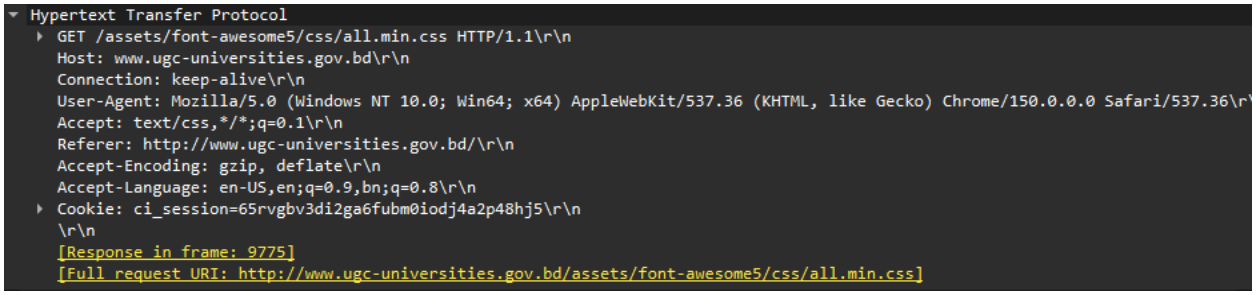


The application layer (HTTP GET) request headers. It details the request path for the CSS stylesheet (/assets/css/fontawesome.css) on the target host (www.ugc-universities.gov.bd), along with browser User-Agent details.


Response

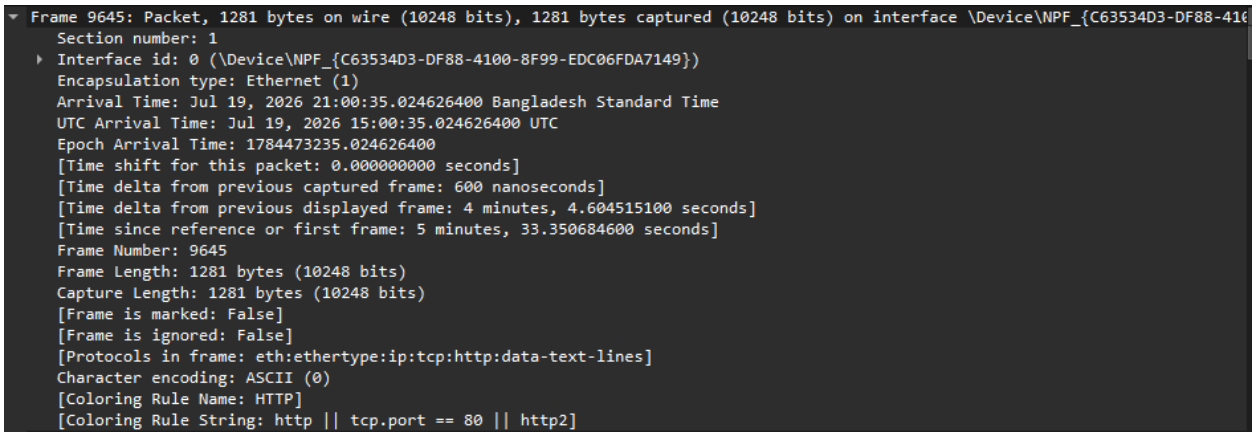


The physical layer details of the incoming server HTTP response (Frame 9645). It indicates that the response frame has a total length of 1293 bytes on the wire and details the specific frame arrival time.

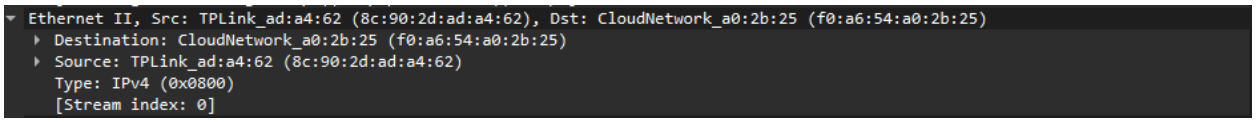


The data-link layer (Ethernet II) details of the response packet. It lists the server gateway MAC address (00:1c:c4:40:9e:3a) as the source, and the client MAC address (0c:84:dc:22:98:98) as the destination.

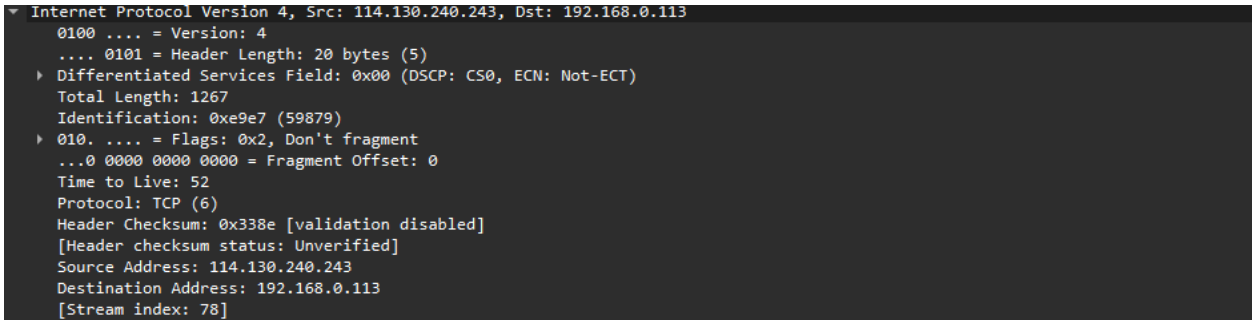

The IPv4 header of the incoming HTTP response packet. It highlights the source IP address as the server (114.130.240.243) and the destination IP address as the local client (192.168.0.113).

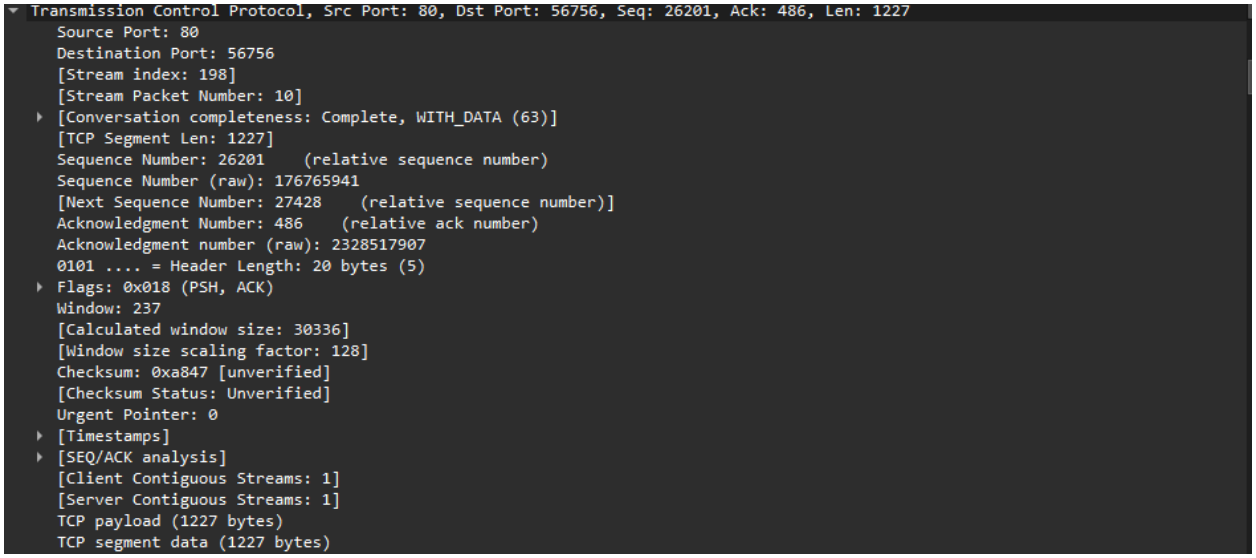

TCP layer details of the response packet. It specifies the source port (80) of the server, destination port (56756) of the client, TCP sequence/acknowledgment numbers, and the TCP payload length of 1227 bytes.

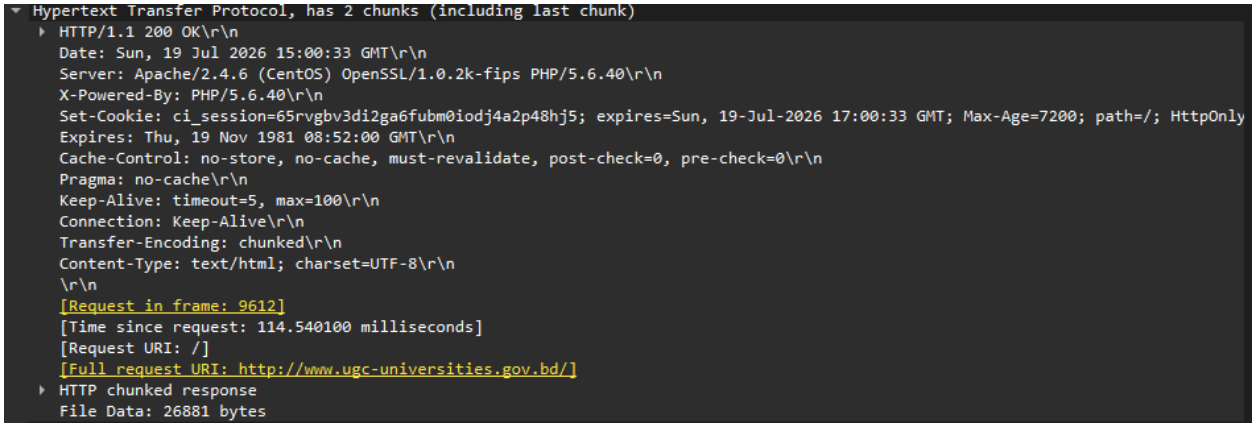

The HTTP response headers returned by the server. It indicates a successful status of HTTP/1.1 200 OK, the Apache server version on CentOS, cookie-setting parameters, cache controls, and content headers.