

Our Range of **PRODUCTS**



































COLLECTIONS

Available in Size: 2440mm x 1220mm (8 Feet x 4 Feet) Thickness: 1.5mm (± 10%)

GENERAL USE & CARE GUIDE

ELLE LOOK are manufactured with aesthetics and durability in mind. when used as recommended and with appropriate care, our acrylic will last through the years. ELLE LOOK are easy to maintain.

APPLICATIONS















Kitchen

Commercial


Wall Cladding &

ACRYLIC

- Cleaning Should be done with water and a clean, non-abrasive cloth.
- To remove more stubborn stains, use mild household cleansers like colin IP gently wipe down with a non-abrasive cloth.

Restaurants

- Avoid the use of abrasive liquid cleansers, bleaching compounds or solution as these may damage the surface of the acrylic.
- Do not place hot cookware directly on the acrylic. Prolonged exposure to temperatures above 30° degree Celsius may cause damage to the acrylic surface.
- Do not use the acrylic for purposes that it is not intended for (E.g. do not iron, chop, hammer or expose the acrylic to open flame.)
- Outdoor application of the acrylic with exposure to direct sunlight and weather conditions are not recommended.
- UV rays may reshape the acrylic.
- Gloss surfaces are recommended only for vertical application.
- Do not use thinner and toluene on the surface of the ELLE LOOK this may cause decolorization of the surface.
- Store the acrylics at temperature below 30 degree celsius.
- Typically confirm to internationally recognized technical standards.
- Have a thickness balance of +/- 10%
- Peel off the protective film within 15 days of installation





THE WAYS YOU CAN ENJOY THE ROYALNESS OF ELLE LOOK
TO MAKE YOUR DREAMS ALIVE IN A SMART WAY.

- To avoid the problems of air bubbles appearing and any yellow colour dullness or yellow patches problem in the acrylic sheet after installation of ELLE LOOK Customer should know some facts before buying ELLE LOOK
- As ELLE LOOK is 6H Acrylic acrylic which have the scratch resistance characteristic and look like back painted glass colour acrylic. Please Follow some fact about installation of ELLE LOOK
- Please check the acrylic at the time of delivery, check it whether it was not damaged in transportation & handling and then use for installation.
- Before installing ELLE LOOK make sure that substrate
 (Plywood MDF, Particle Board) is good calibrated and evenly surfaced.
- If there is usage of any inferior quality or not as per standard quality (dipped plywood and dipped lipping patti) kindly scrub dipped colour layer by using sand paper. Then use ELLE LOOK to avoid yellow colour patches.
- Clean the surface of substrate (Plywood, MDF, Particle Board) to make free from dust or grease by cloth, soft brush, sponge or sand paper.
- Always use acrylic glue.
- Stir the adhesive before using it, and do not mix water in adhesive.
- Spread the adhesive uniformly by brush, roller or adhesive spreader on both ELLE LOOK and substrate (Plywood, MDF, Particle Board).
- Use soft pinch roller or normal pressing technique at the time of pressing ELLE LOOK on the substrate (Plywood, MDF, Particle Board). And also pressing should be done from the middle of the panel and move towards to side line and corners of panel. So that air between the TREESHAW ACRYLAM and substrate (Plywood, MDF, Particle Board) will be Removed.
- Please make sure, to give sufficient amount of pressing to TREESHAW
 ACRYLAM for almost 24hrs to achieve full bonding strength.
- Please do not use synthetic rubber adhesive (SR, JAT Pat, Bostic, Heatxetc.)
- After the installation of ELLE LOOK acrylic please avoid direct sunlight on it.
- Please don't place hot cookware directly on the ELLE LOOK
 Prolonged exposure to temperature above 30°C may cause patches to
 ELLE LOOK

WHY AIR BUBBLE APPEARS IN BETWEEN ACRYLIC
AND SUBSTRATE (PLYWOOD, MDF, PARTICLE BOARD)
AFTER THE INSTALLATION?

The reasons which lead to air bubble problems are

Bonding of acrylic under high humidity atmosphere


Using of water base synthetic resin adhesive or other than PEVA (Polyethylene Vinyl Acetate Co-polymer) adhesive may also lead to air bubble after the installation acrylic.

Many times due to uncertain weather conditions Substrate (Plywood, MDF, Particle Board) absorbs moisture. after few days of installation acrylic on substrate gradually loses moisture. that moisture is the result of air bubble between acrylic and substrate after installation

Using odd uneven surface Substrate (Plywood, MDF,
Particle Board) Lead to debone at particular area of acrylic
sheet and air bubble appear at that area after the installation

Lack of pressing and short period of pressing at the time of bonding period of Acrylic also lead to air bubble after the installation of acrylic.

WHY YELLOW PATCHES AND COLOUR FADE PROBLEM APPEARS AFTER THE INSTALLATION OF ACRYLIC?



When Acrylic experiences the direct fall of sunlight it leads to discolouring, fading and yellowness in acrylic.

Using of inferior quality or not as per standard quality dipped plywood & dipped lipping patti may lose the colour due to chemical reaction between adhesive at the time of bonding, yellow patches appear after the installation.

Using of synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) will lead to brown colour patches on Acrylic.

Prolonged exposure temperature to above 30° or placing hot cookware directly on the Acrylic cause patches on Acrylic surface.






















80mm X 180mm

80mm X 180mm

The purity of a baby's first smile, **emerging** in a world of **innocence**, radiates the **brightness** of the color white.

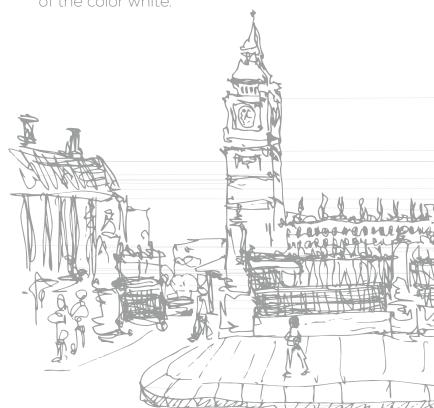

KZ - 19001 /

KZ - 19002 /



















80mm X 180mm

80mm X 180mm

KZ - 19011 /

KZ - 19012






















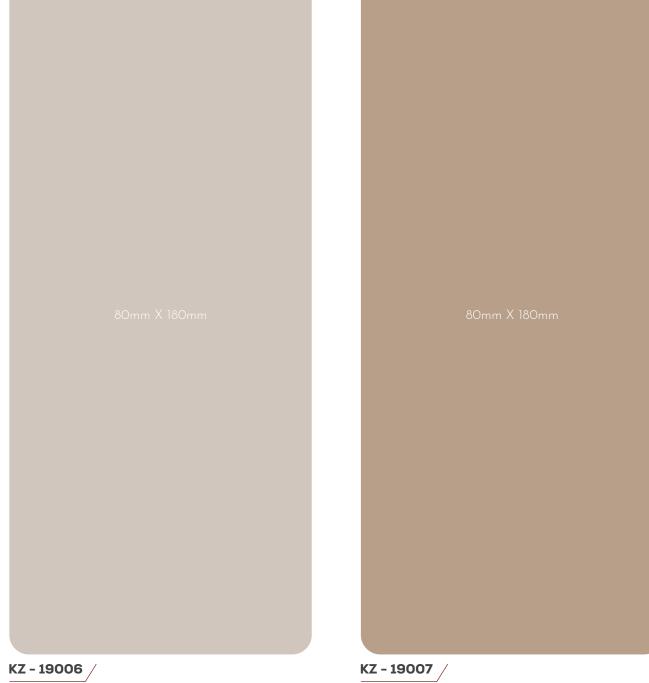

























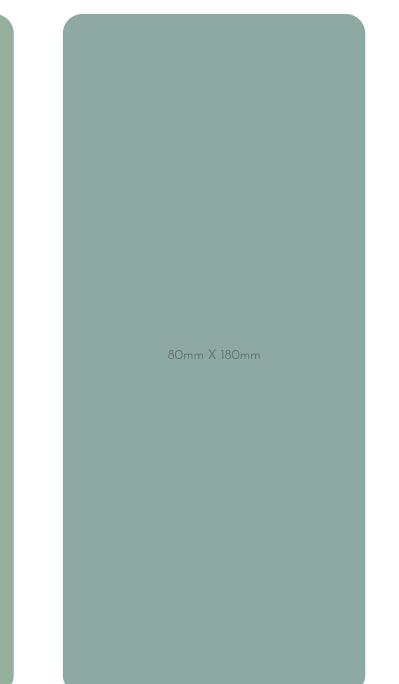

KZ - 19020 / KZ - 19013 / KZ - 19010 /

















80mm X 180mm

80mm X 180mm

80mm X 180mm

KZ - 19003 /

KZ - 19004 /

KZ - 19008



















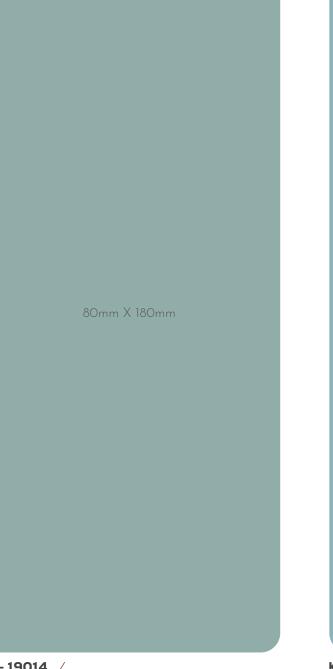



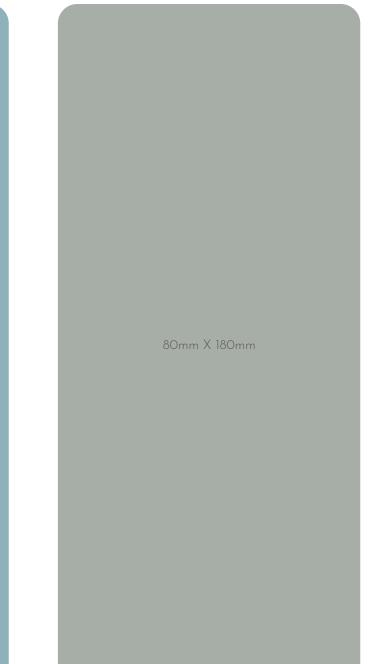

KZ - 19014 / KZ - 19015 KZ - 19016




















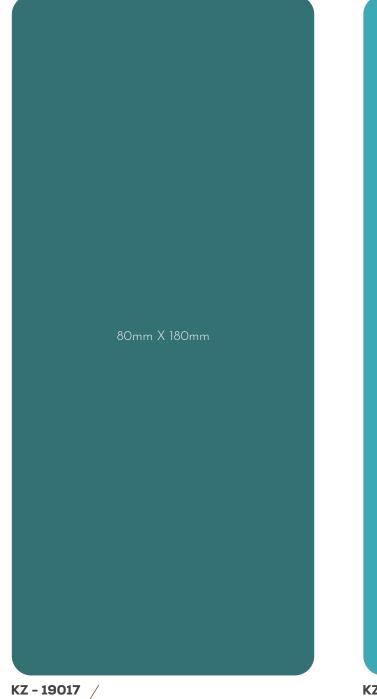





KZ - 19019 / KZ - 19018 /





















































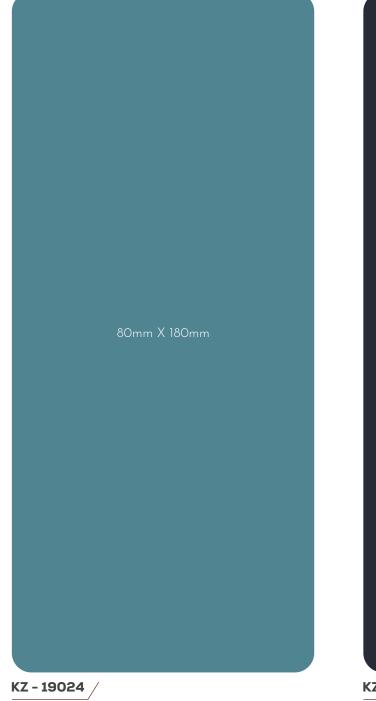

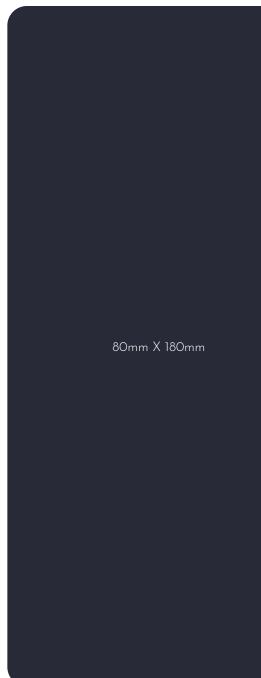



KZ - 19023 / KZ - 19025 /

















EUROPEAN SATIN MAT

80mm X 180mm

80mm X 180mm

80mm X 180mm

KZ - 19201 /

KZ - 19202 /

KZ - 19203 /







KZ - 19204 /













EUROPEAN SATIN MAT

80mm X 180mm

KZ - 19206

KZ - 19205 /

KENZO

80mm X 180mm

















EUROPEAN SATIN MAT

nm X IoUmm

80mm X 180mm

KZ - 19207 /

KZ - 19208 /

KZ - 19209 /




















EUROPEAN SATIN MATT

80mm X 180mm KZ - 19210 /



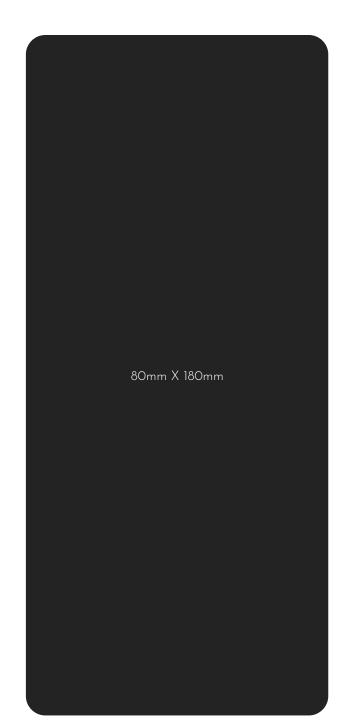


KZ - 19212



REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS

















To avoid de lamination / air bubbles in between ply and LAMINATES the above steps should be taken care of.

Bonding of acrylic sheets shouldn't be completed under high humidity

Parameters	ELLE LOOK KENZO LAMINATE 6H	High Gloss LAMINATES Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	> 90	>70	>85	> 85
Scratch Proof	6H Antisractch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	Yes
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes
Bending Capability	100 Degree	-	Other Laminate	No Possibilities





- Do not use plywood with high moisture content
- Do not use ply with uneven surface
- Avoid using inferior quality adhesive
- Apply sufficient pressure
- We do not recommend pasting of sheets on the printed/branding area of the plywood



ELLE LOOK Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications with realistic deviations. we recommend customers to inspect properly before installing. ELLE LOOK warranty in no way covers defects and non-compliance from or otherwise attributable to any other causes, including without limitation the following:

- Improper handling / transportation / storage of ELLE LOOK
- Improper installation of ELLE LOOK
- Improper or unintended usage of ELLE LOOK
- Lack of or improper maintenance of ELLE LOOK Exposure to high temperatures
- Unauthorized alteration to the products Outdoor applications
- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only. Actual colors may differ.







