

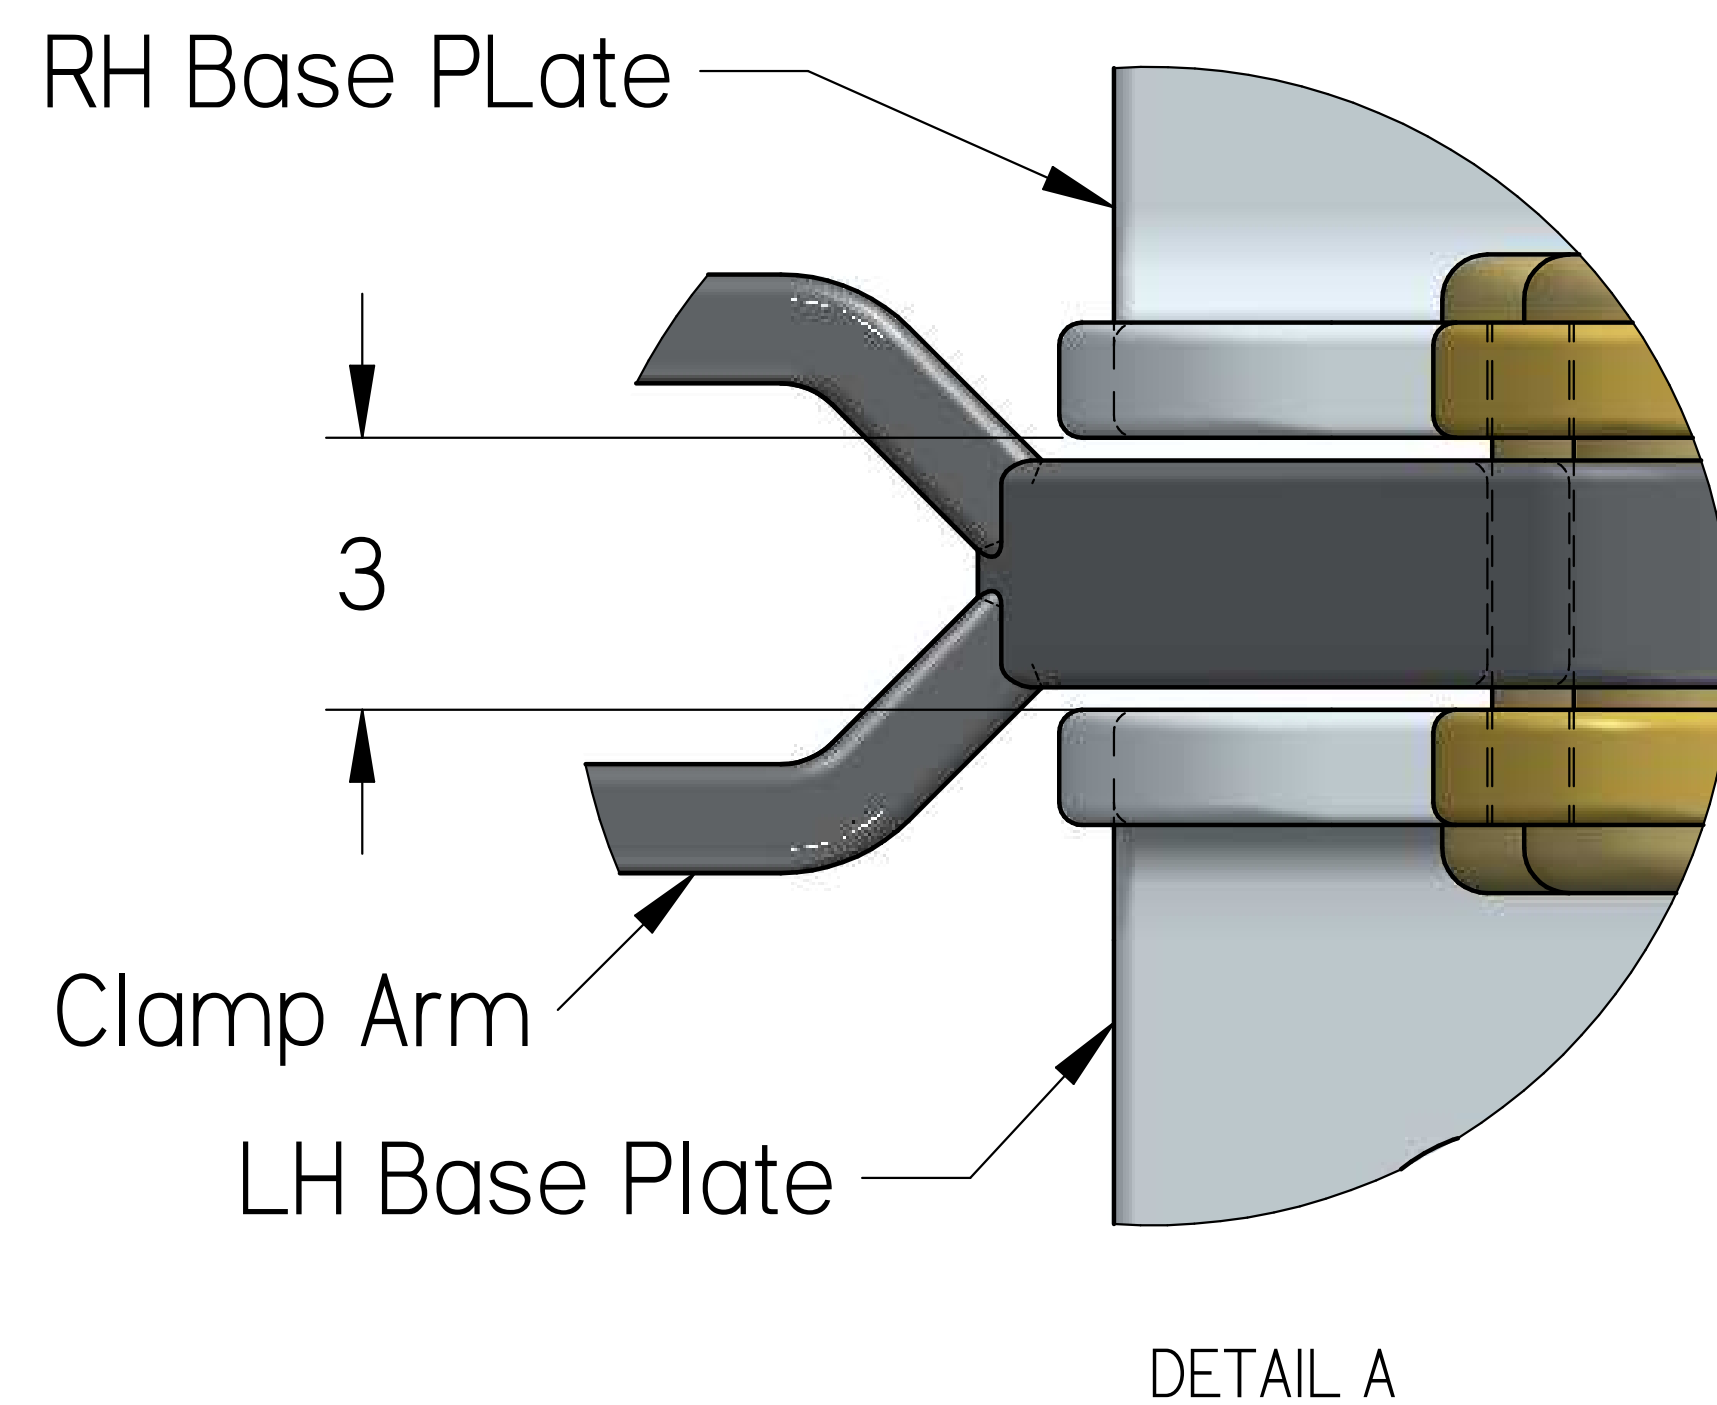
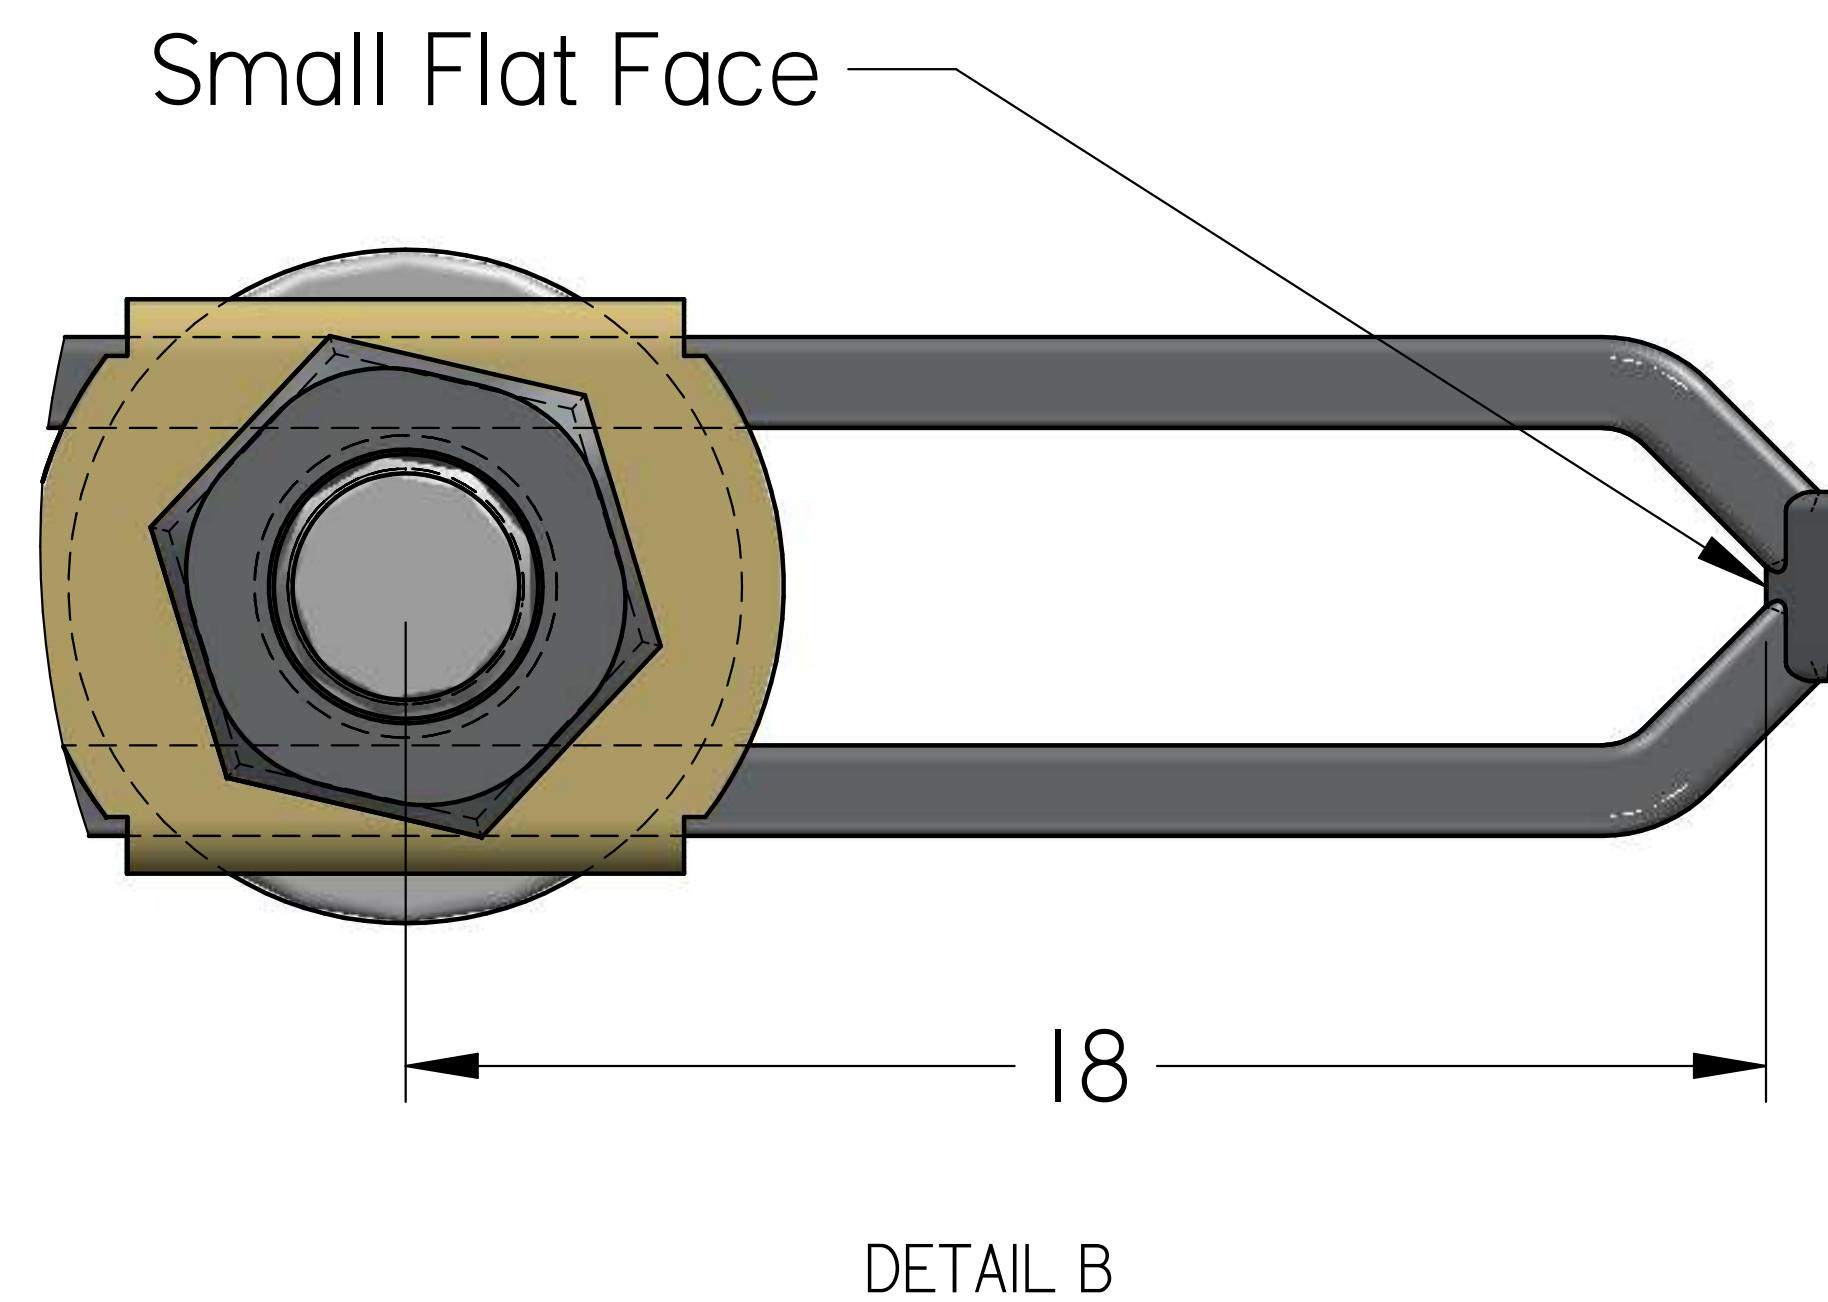
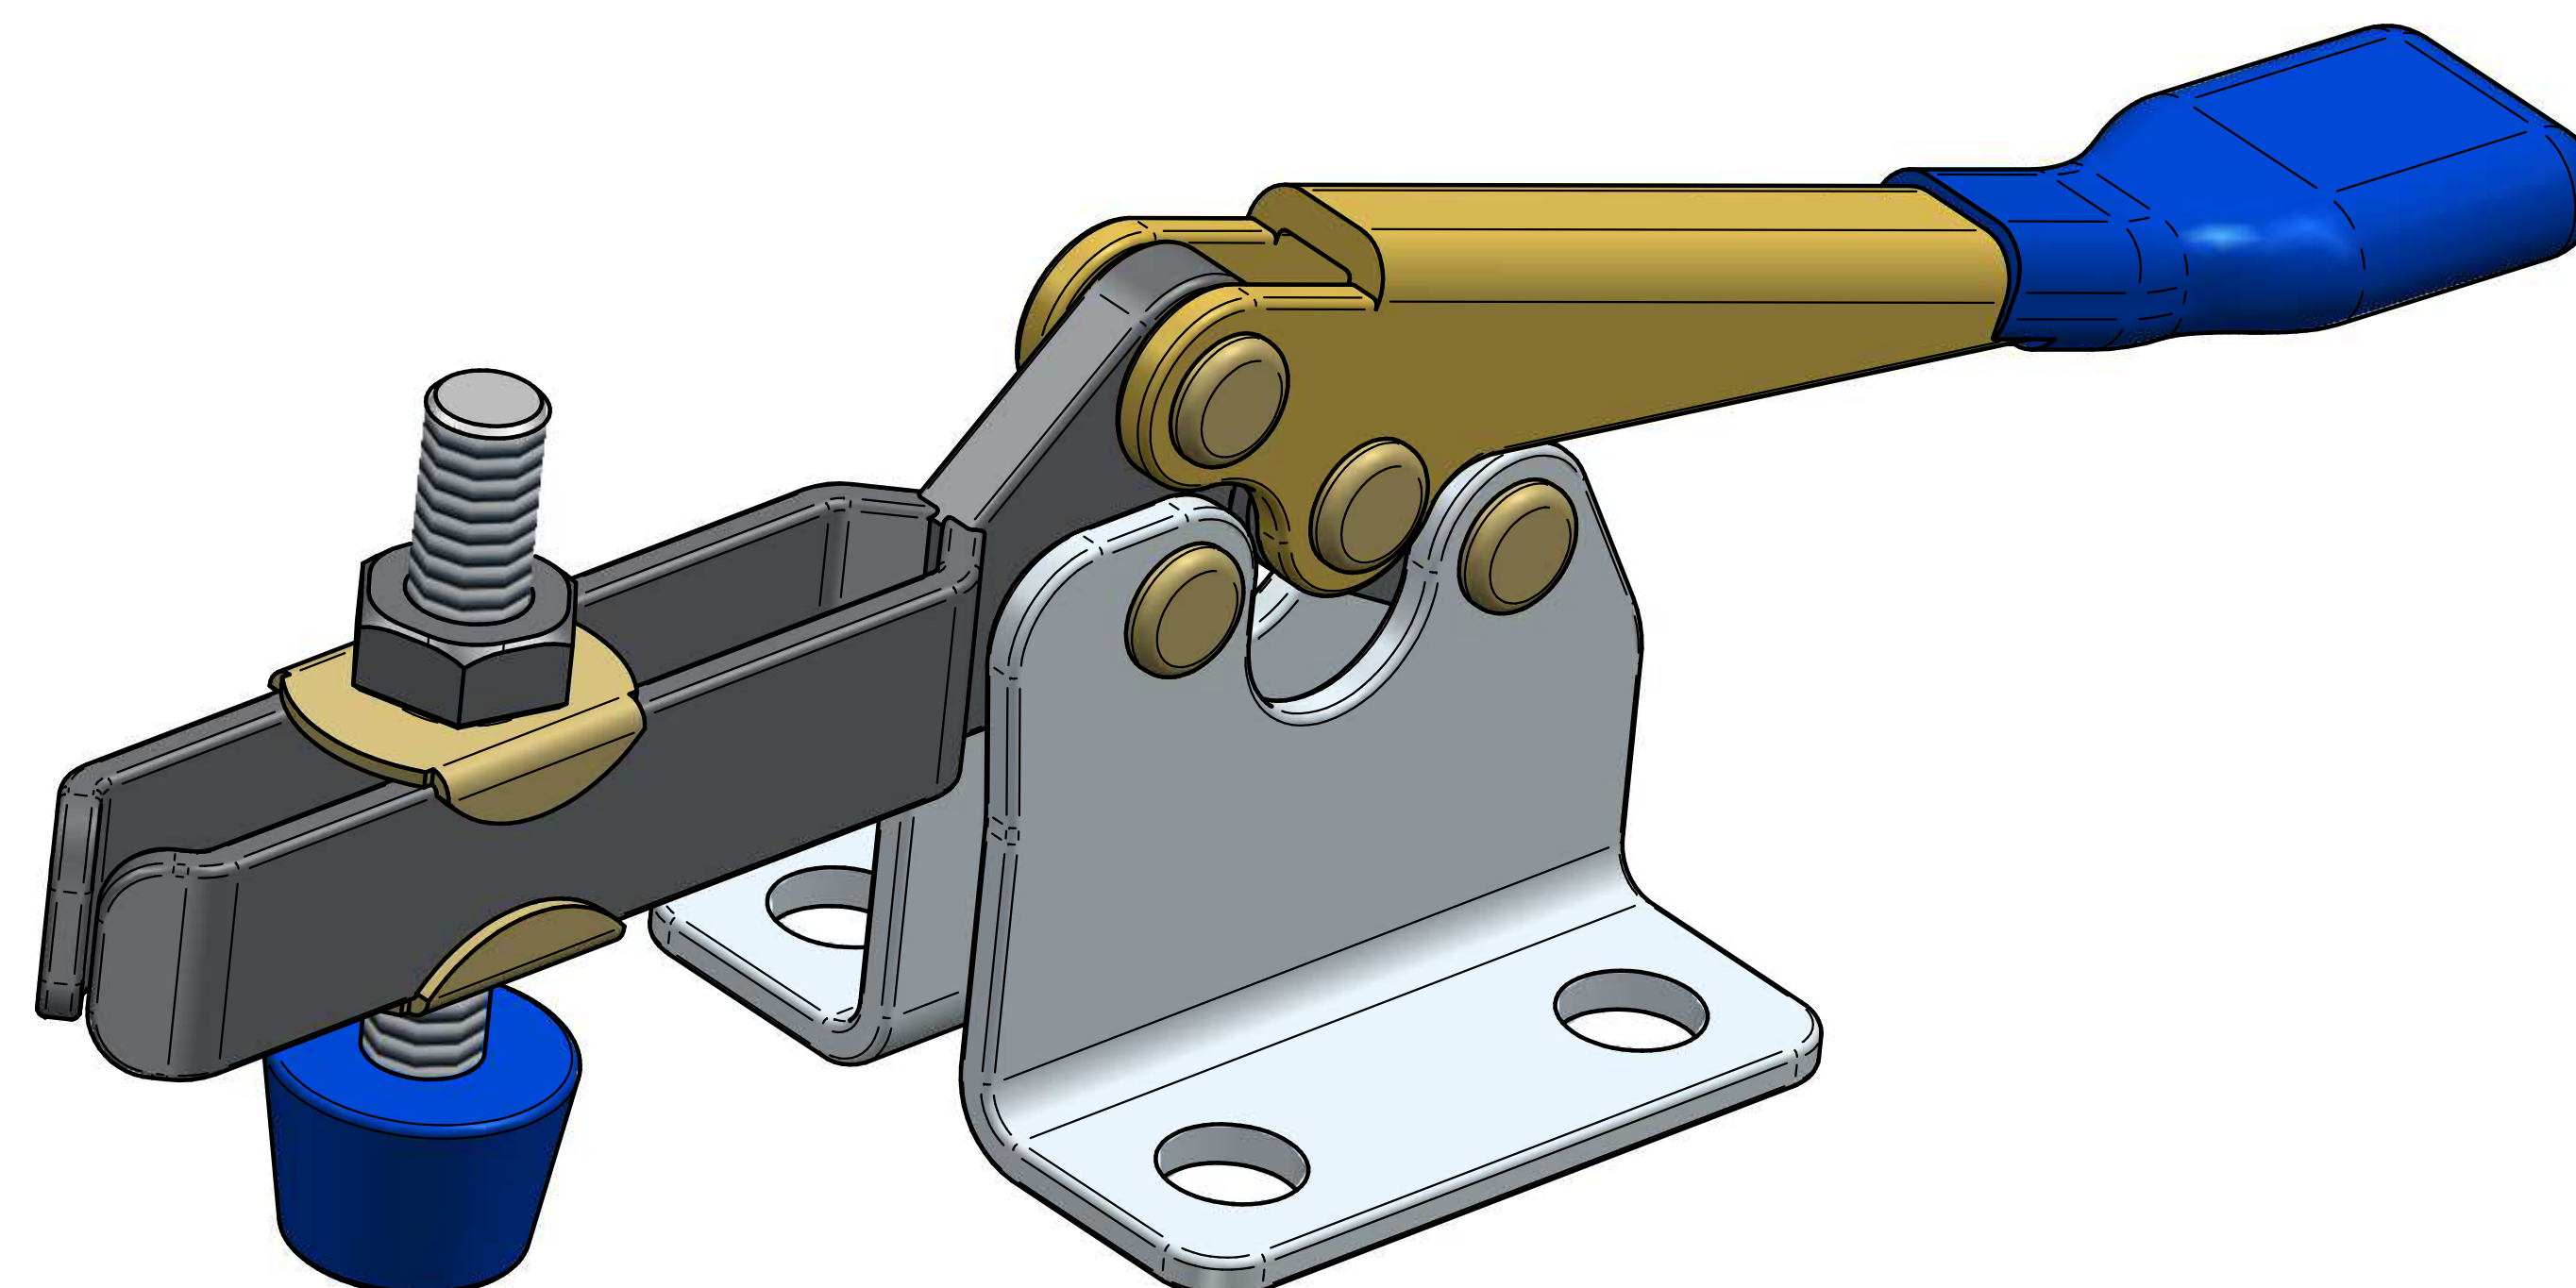


- Open Clamp.asm
- Review the following pages
- Finish assembling as shown
- Be sure to add all parts

ITEM	NAME	MAT'L	QTY
1	LH Base Plate	Stainless steel	1
2	RH Base PLate	Stainless steel	1
3	Link	Stainless steel	1
4	Clamp Arm	Stainless steel	1
5	Handle Assembly		1
6	Rivot	Steel	4
7	Threaded Washer	Stainless steel	2
8	Stopper Stud	Steel	1
9	3.5mmNut	Steel	1

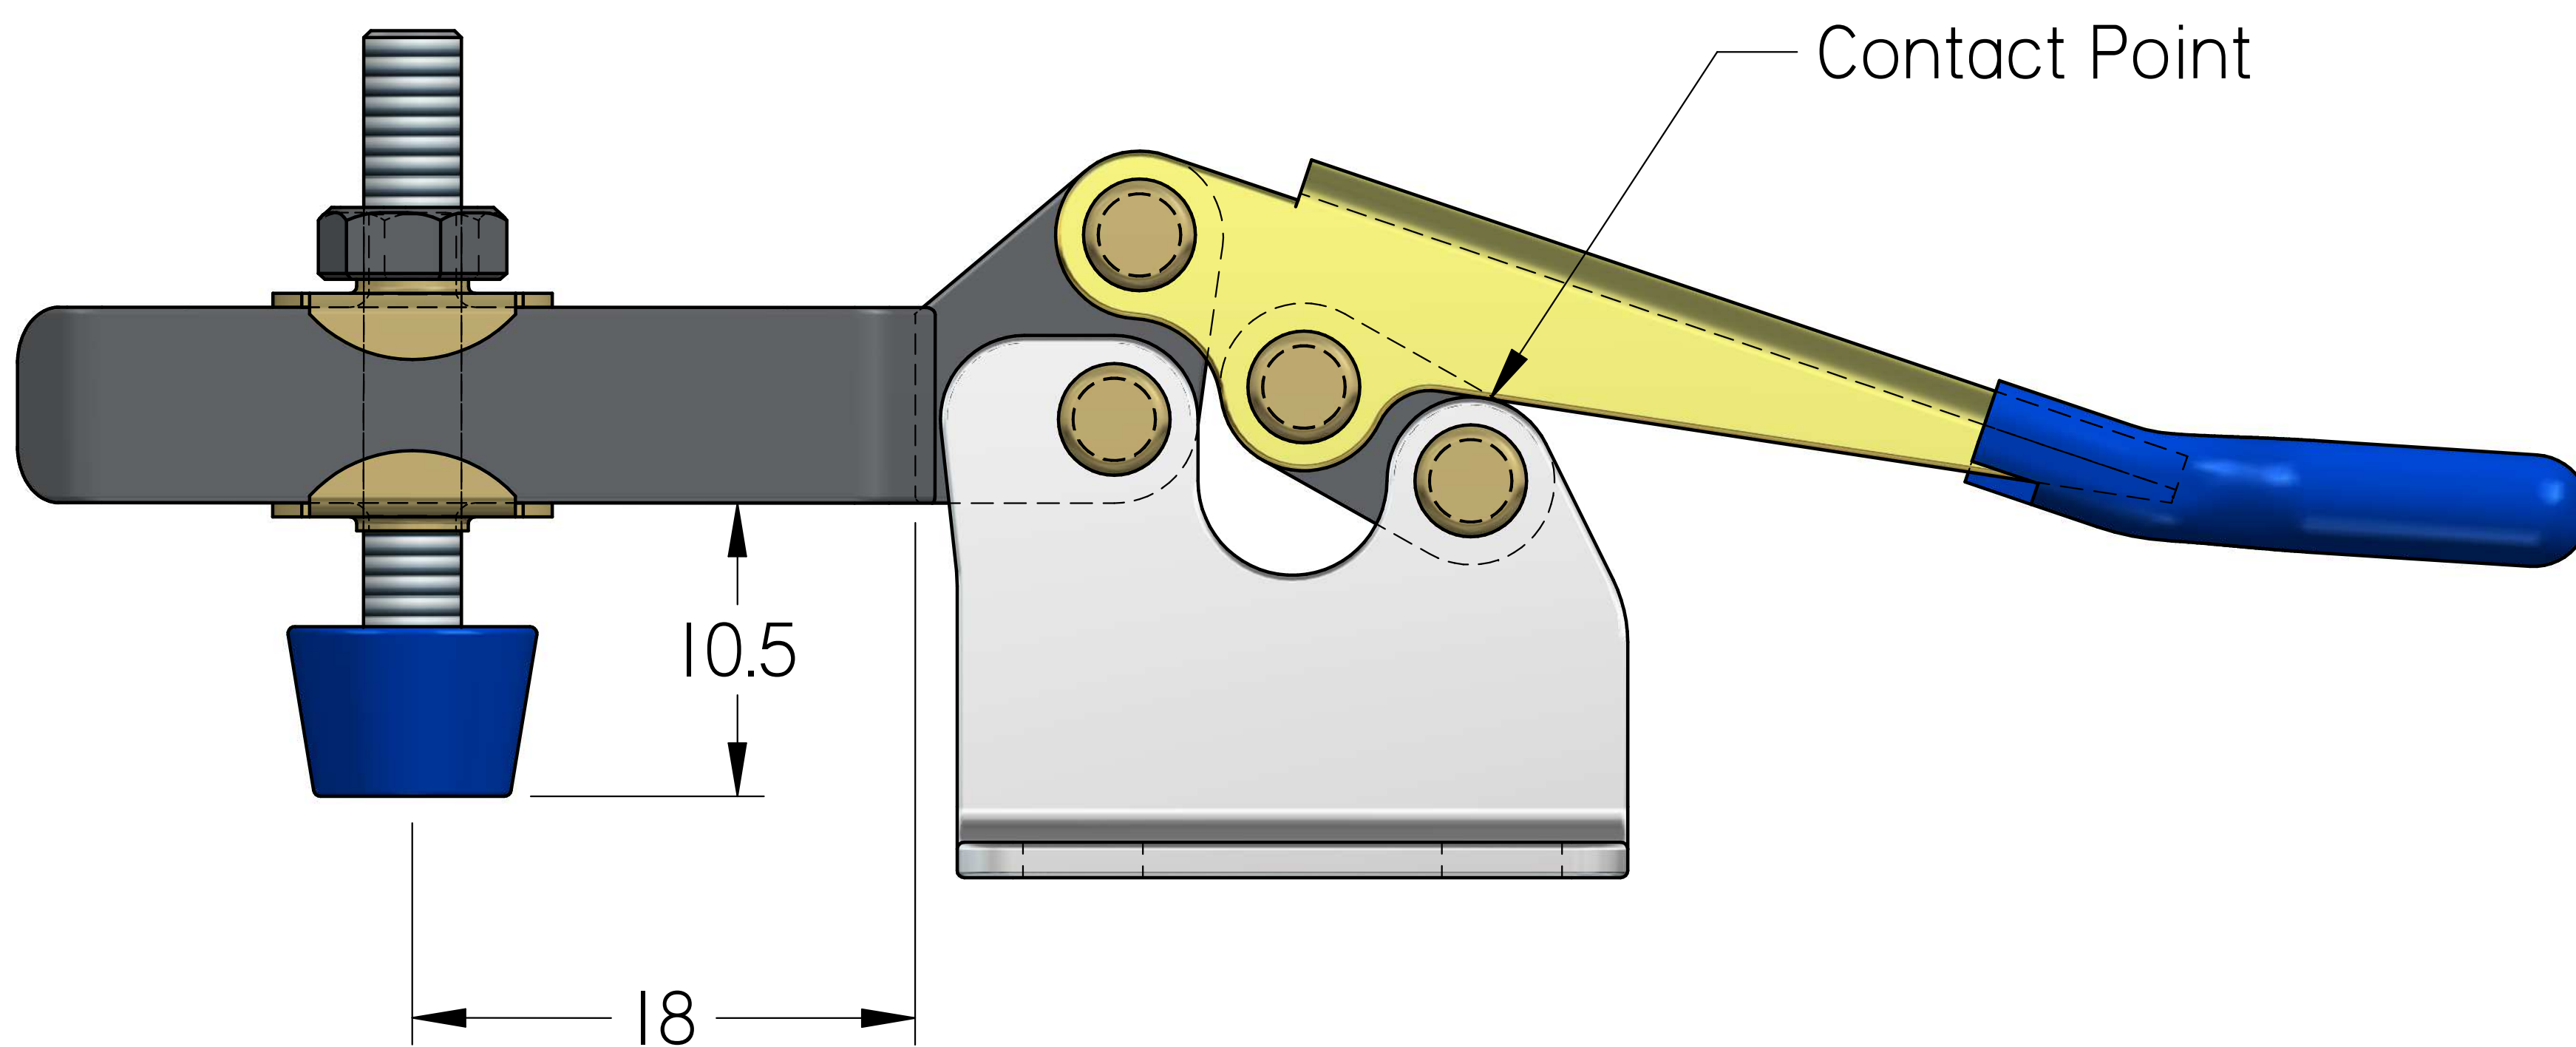

- 3.00 mm gap between Base Plates
- Clamp Arm, Handle Assembly, and Link are centered between Base Plates
- Clamp in fully locked position

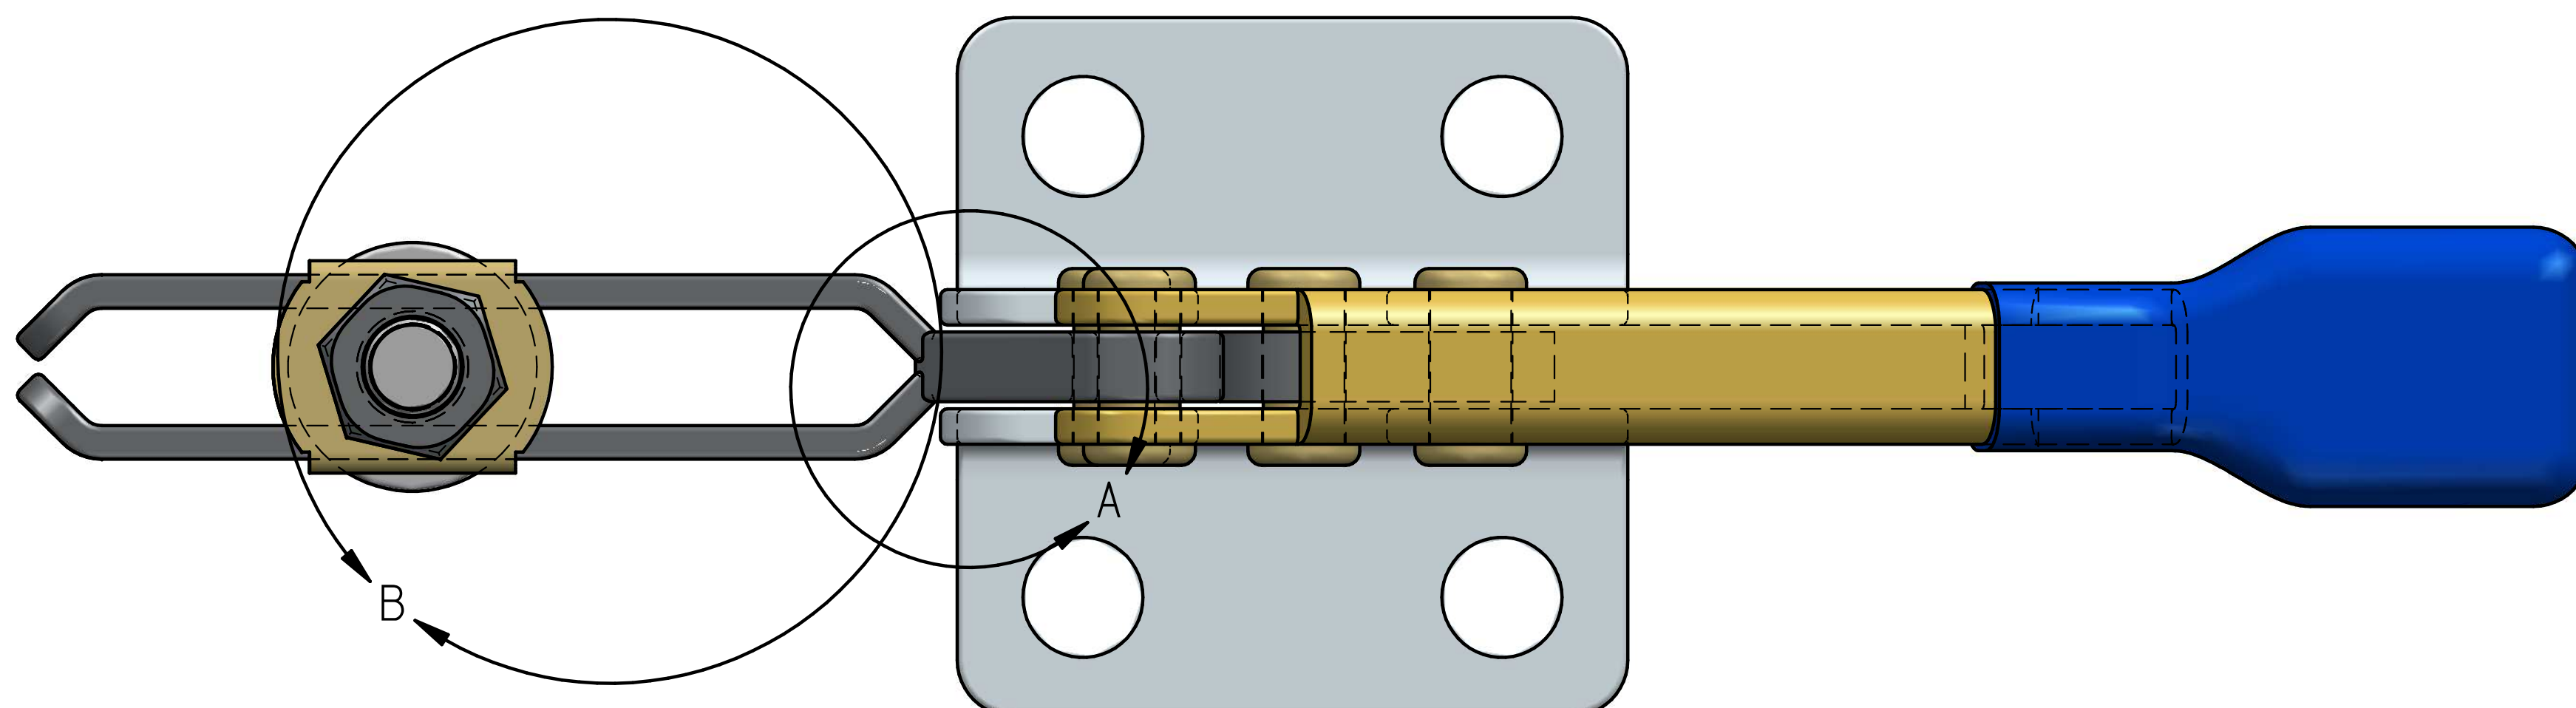

- Clamp in fully open and unlocked position

