# WOLFER

TILE SOLUTION

Introducing NG NEXT GENERATION PRODUCTS

एक नई
शुरुआत
के लिए



## BEAUTIFYING YOUR HOMES TILE BY TILE

SUPERIOR RANGE OF
INTERIOR EXTERIOR

WOLFER
TILE SOLUTION

# EPOXY grout




WOLFER EXPOXY GROUT is a three-component color-fast, stain and chemical resistance, hard wearing and impervious tile joint epoxy resin-based grout specifically designed for use in application of ceramic tiles, vitrified tiles, semi-vitrified tile, glass mosaic tiles, metal tiles, precast terrazzo, engineered stone floors and natural stone joints where a hygienic and sterile condition is expected. it is well suited for interior and covered exterior floor and wall of residential and commercial applications. It effectively fills the gaps and levels itself to give a hard-wearing, dust & water proof tile joint.

## APPLICATION AREAS

- Floor and wall tiles in bathroom kitchen and living area.
- Terrace and Balconies.
- Commercial and Industrial properties.

## TECHNICAL DETAILS


| | | |
|---|---|---|
| **Chemical Base** | : | **Epoxy** |
| **Mixing Ratio** | : | **0.9 : 0.1** |
| **Pot Life** | : | **35-45min** |
| **Working Time** | : | **1 Hour** |
| **Tack Free Time** | : | **6-7 Hrs.** |
| **Heavy Traffic** | : | **72 Hrs.** |
| **Bond Strength** | : | **7.55 Mpa** |
| **Comprehensive Strength** | : | **50.45 Mpa** |
| **Tensile Strength** | : | **15.25 Mpa** |
| **Glitter Effect** | : | **Gold, Silver & Copper** |

## BENEFITS

- Prevents cracking in tile joints
- Stain & Acid Resistant Tile Joint Filler
- Waterproof Tile Joints
- Easy to clean
- Durable

## SHELF LIFE

Best Before 24 months in a sealed pack under proper storage.

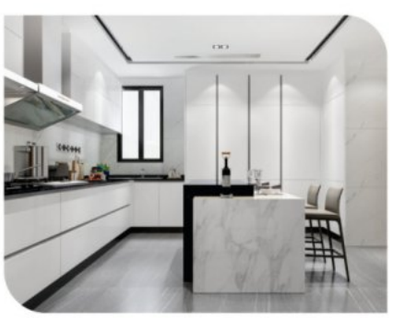



WOLFER
TILE SOLUTION

# EPOXY / GROUT COLOURS

| | | |
|---|---|---|
| Bright White | Marble Beige | Ivy* |
| Quarry Red | Midnight Black | Sierra Sunrise* |
| Silk | Silver Shadow | Inca Gold |
| Almond | Slate Grey | Sage* |
| Antique White | Natural Grey | Aqua Blue* |
| Parchment | Platinum | Cadmium Red |
| Sandstone | Mayan Red | Spectra Blue |
| Inca Gold | Sable | Olive Green |

## TILES SIZE X THICKNESS

TILES SIZE X THICKNESS

| in mm | 1.5mm | 2mm | 3mm | 4mm | 6mm | 8mm | 10mm | 12mm |
|---|---|---|---|---|---|---|---|---|
| 100x100x3 | 342 | 264 | 177 | 133 | 90 | 68 | 55 | 46 |
| 150x150x4 | 385 | 296 | 198 | 149 | 100 | 75 | 61 | 51 |
| 200x150x5 | 348 | 269 | 181 | 136 | 91 | 69 | 53 | 46 |
| 150x300x6 | 340 | 263 | 175 | 132 | 88 | 66 | 53 | 44 |
| 300x300x6 | 515 | 394 | 263 | 198 | 132 | 100 | 80 | 67 |
| 450x300x7 | 530 | 405 | 270 | 202 | 135 | 101 | 81 | 68 |
| 600x450x8 | 664 | 506 | 337 | 253 | 169 | 127 | 101 | 85 |
| 600x600x8 | 750 | 591 | 394 | 295 | 197 | 148 | 119 | 99 |
| 600x900x11 | 654 | 515 | 343 | 258 | 171 | 129 | 103 | 86 |
| 900x900x12 | 749 | 590 | 393 | 295 | 197 | 148 | 118 | 99 |

## STARLIKE

**EASY TO CLEAN, HIGH PERFORMANCE 2K EPOXY TILE GROUT**

### FEATURES & ADVANTAGES




Waterproof | Stain Resistant | Acid Resistant | UV Resistant | Swimming Pool | Fill Joints upto 1-15 mm | For Internal & External Use

WOLFER
TILE SOLUTION

# TILE ADHESIVE



## STRENGTH

The high-quality premium adhesives come with high tensile adhesion strength and outstanding non-slump properties which prevents the tiles from slipping, ensuring ultimate strength. It's easier to get a uniform pattern while working with the tiles. All thanks to the Wolfer Tile Adhesive.

## ECONOMY

The applicability of WOLFER tile adhesives over larger areas ensures economy and less costs. It's also easier to adjust the tiles after laying which reduces the recurring cost of buying new tiles every time a tile is laid incorrectly.

## QUALITY

The premium quality of WOLFER tile adhesives guarantees outstanding results and excellent applicability for a longer period as they have high bond strength and fast setting quality.

## Some More Key Features:

- Fast Setting
- High Bond Strength
- High Tensile Adhesion Strength
- Saves Time; Surface ready to use within 24 hours

*not suitable for surfaces subject to vibration like plywood, metal, glass, gypsum boards, fibre cement slabs & smooth pre-fabricated concrete.

WOLFER
TILE SOLUTION

# TILE ADHESIVE




## PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES

WOLFER 100 is a polymer-modified, grey, cement-based, quick-setting tile adhesive, ideal for indoor applications to fix high-porosity tile floors. It bonds perfectly on a variety of cement based substrates. like cement plaster, cement mortar bed, Brick concrete etc.

**Pack Size:** 20Kg.

**Applications:**

For all kinds of Ceramic/Semi Vitirified Floor Tiles.

Tiles with porosity greater than 3% can be used on a bed thickness upto 6mm.

**Advantages:**

- Ready to use.
- High water retention.
- Specifically formulated for tile bedding applications.
- Excellent bond strength.
- Fast Setting.



## Technical Data: (Type-1)

| | |
|---|---|
| Comodity: | Cement Based Product |
| Deformability: | S1 |
| Open Time: | Not less than 20min. |
| Adjustability: | Not less than 20min. |
| Shelf Life: | Best before 12 months from manufacturing date |

## Precautions:

- Wear protective gloves/gear while handling.
- People allergic to dust & pollution are suggested to stay away while product's mixing & handling.
- Product is non-toxic, however wear mask to avoid dust inhalation.
- In case of eye contact, wash with clean water immediately or contact doctor.
- Keep it away from children.

WOLFER
TILE SOLUTION

# TILE ADHESIVE



## STRENGTH

The high-quality premium adhesives come with high tensile adhesion strength and outstanding non-slump properties which prevents the tiles from slipping, ensuring ultimate strength. It's easier to get a uniform pattern while working with the tiles. All thanks to the Wolfer Tile Adhesive.

## ECONOMY

The applicability of WOLFER tile adhesives over larger areas ensures economy and less costs. It's also easier to adjust the tiles after laying which reduces the recurring cost of buying new tiles every time a tile is laid incorrectly.

## QUALITY

The premium quality of WOLFER tile adhesives guarantees outstanding results and excellent applicability for a longer period as they have high bond strength and fast setting quality.

## Some More Key Features:

- Fast Setting
- High Bond Strength
- High Tensile Adhesion Strength
- Saves Time; Surface ready to use within 24 hours

*not suitable for surfaces subject to vibration like plywood, metal, glass, gypsum boards, fibre cement slabs & smooth pre-fabricated concrete.

WOLFER
TILE SOLUTION

# TILE ADHESIVE




## HIGH PERFORMANCE PREMIUM TILE ADHESIVE FOR ALL KIND OF FLOOR TILES

WOLFER200 is a polymer-modified, grey, cement-based tile adhesive specially designed for fixing all kinds of tiles including small to medium format tiles, vitrified tiles & ceramic tiles on internal or external floor surfaces. This highly flexible adhesive also has excellent waterproofing ability.

**Pack Size:** 20Kg.

**Applications:**

For All kinds of Floor Tiles.
Interior wall & floor exterior floor only.
Bed thickness upto 3-12 mm.

**Advantages:**

- Ready to use.
- High water retention.
- Specifically formulated for tile bedding applications.
- Excellent bond strength.
- Fast Setting.



## Technical Data: (Type-2)

| | |
|---|---|
| Comodity: | Cement Based Product |
| Deformability: | S1 |
| Open Time: | Not less than 20min. |
| Adjustability: | Not less than 20min. |
| Shelf Life: | Best before 12 months from manufacturing date |

## Precautions:

- Wear protective gloves/gear while handling.
- People allergic to dust & pollution are suggested to stay away while product's mixing & handling.
- Product is non-toxic, however wear mask to avoid dust inhalation.
- In case of eye contact, wash with clean water immediately or contact doctor.
- Keep it away from children.



WOLFER
TILE SOLUTION







