

Document Title	Specification of Ethernet Transceiver Driver
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	431
Document Classification	Standard
Document Status	Final
Part of AUTOSAR Standard	Classic Platform
Part of Standard Release	4.3.0

Document Change History			
Date	Release	Changed by	Change Description
2016-11-30	4.3.0	AUTOSAR Release Management	<ul style="list-style-type: none"> Configuration via Switch or Mii 100BASE-T1 test mode support
2015-07-31	4.2.2	AUTOSAR Release Management	<ul style="list-style-type: none"> EthTrcv_TransceiverInit functionality merged into EthTrcv_Init API Development Error Tracer renamed to Default Error Tracer
2014-10-31	4.2.1	AUTOSAR Release Management	<ul style="list-style-type: none"> Change from Synchronous to Asynchronous API Ethernet Wakeup Support
2013-10-31	4.1.2	AUTOSAR Release Management	<ul style="list-style-type: none"> Introduction of Eth_GeneralTypes.h Support of API deviation for asynchronous implementation Editorial changes Removed chapter(s) on change documentation
2013-03-15	4.1.1	AUTOSAR Administration	<ul style="list-style-type: none"> 1000 kbit Ethernet Support
2011-12-22	4.0.3	AUTOSAR Administration	<ul style="list-style-type: none"> EthTrcv_GetVersionInfo revised

Document Change History			
Date	Release	Changed by	Change Description
2010-09-30	3.1.5	AUTOSAR Administration	<ul style="list-style-type: none">• Further post-build configurable parameters• Configuration enhanced by additional parameter EthTrcvWaitCount• 'Instance ID' removed from Version Info (concerns EthTrcv_GetVersionInfo API)• Additional development error in EthTrcv_GetVersionInfo API• Improved description of 'XxxCtrlIdx' semantics• Specification of behaviour for state switch into already active state
2010-02-02	3.1.4	AUTOSAR Administration	<ul style="list-style-type: none">• Initial Release

Disclaimer

This specification and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the specification.

The material contained in this specification is protected by copyright and other types of Intellectual Property Rights. The commercial exploitation of the material contained in this specification requires a license to such Intellectual Property Rights.

This specification may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the specification may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The AUTOSAR specifications have been developed for automotive applications only. They have neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Advice for users

AUTOSAR specifications may contain exemplary items (exemplary reference models, "use cases", and/or references to exemplary technical solutions, devices, processes or software).

Any such exemplary items are contained in the specifications for illustration purposes only, and they themselves are not part of the AUTOSAR Standard. Neither their presence in such specifications, nor any later documentation of AUTOSAR conformance of products actually implementing such exemplary items, imply that intellectual property rights covering such exemplary items are licensed under the same rules as applicable to the AUTOSAR Standard.

Table of Contents

1	Introduction and functional overview	7
2	Acronyms and abbreviations	9
3	Related documentation.....	10
3.1	Input documents	10
3.2	Related standards and norms	11
3.3	Related specification	11
4	Constraints and assumptions	12
4.1	Limitations	12
4.2	Applicability to car domains	12
5	Dependencies to other modules.....	13
5.1	File structure.....	14
5.1.1	Header file structure.....	14
6	Requirements traceability	15
7	Functional specification	16
7.1	Ethernet BSW stack	16
7.1.1	Indexing scheme.....	16
7.1.2	Requirements.....	17
7.1.3	Configuration description	18
7.1.4	Wake-up support.....	19
7.2	Error classification	19
7.2.1	Default Errors.....	19
7.2.2	Runtime Errors.....	20
7.2.3	Transient Faults	20
7.2.4	Production Errors	20
7.2.5	Extended Production Errors.....	20
8	API specification	21
8.1	Imported types.....	21
8.2	Type definitions	21
8.2.1	EthTrcv_ConfigType	21
8.2.2	EthTrcv_ModeType.....	22
8.2.3	EthTrcv_LinkStateType.....	22
8.2.4	EthTrcv_StateType	22
8.2.5	EthTrcv_BaudRateType.....	22
8.2.6	EthTrcv_DuplexModeType	22
8.2.7	EthTrcv_WakeupModeType.....	23
8.2.8	EthTrcv_WakeupReasonType	23
8.2.9	EthTrcv_PhyTestModeType.....	23
8.2.10	EthTrcv_PhyLoopbackModeType.....	23
8.2.11	EthTrcv_PhyTxModeType	24
8.2.12	EthTrcv_CableDiagResultType	24
8.3	Function definitions.....	24

8.3.1	EthTrcv_Init.....	24
8.3.2	EthTrcv_SetTransceiverMode.....	25
8.3.3	EthTrcv_GetTransceiverMode	26
8.3.4	EthTrcv_SetTransceiverWakeupMode	27
8.3.5	EthTrcv_GetTransceiverWakeupMode	29
8.3.6	EthTrcv_CheckWakeup	30
8.3.7	EthTrcv_StartAutoNegotiation.....	31
8.3.8	EthTrcv_GetLinkState.....	31
8.3.9	EthTrcv_GetBaudRate.....	32
8.3.10	EthTrcv_GetDuplexMode	33
8.3.11	EthTrcv_SetPhyTestMode.....	34
8.3.12	EthTrcv_SetPhyLoopbackMode	35
8.3.13	EthTrcv_GetPhySignalQuality	35
8.3.14	EthTrcv_SetPhyTxMode.....	36
8.3.15	EthTrcv_GetCableDiagnosticsResult.....	36
8.3.16	EthTrcv_GetPhyIdentifier.....	37
8.3.17	EthTrcv_GetVersionInfo	37
8.4	Callback notifications.....	38
8.4.1	EthTrcv_ReadMiiIndication	38
8.4.2	EthTrcv_WriteMiiIndication	38
8.5	Interrupt service routines	39
8.6	Scheduled functions	39
8.6.1	EthTrcv_MainFunction	39
8.7	Expected Interfaces.....	39
8.7.1	Mandatory Interfaces	39
8.7.2	Optional Interfaces.....	40
8.7.3	Configurable interfaces	40
9	Sequence diagrams	42
10	Configuration specification.....	43
10.1	Containers and configuration parameters	44
10.1.1	EthTrcv	46
10.1.2	EthTrcvConfigSet	46
10.1.3	EthTrcvConfig.....	46
10.1.4	EthTrcvDemEventParameterRefs	50
10.1.5	EthTrcvMgmtInterface	50
10.1.6	EthTrcvMiiInterface.....	51
10.1.7	EthTrcvSwitchInterface.....	52
10.1.8	EthTrcvGeneral	52
11	Not applicable requirements	57

Known Limitations

Currently, chapter 5 Dependencies to other modules does not describe the versions of dependent modules. Thus, a version check will extend the chapter.

1 Introduction and functional overview

This specification specifies the functionality, API and the configuration of the AUTOSAR Basic Software module Ethernet Transceiver Driver.

In the AUTOSAR Layered Software Architecture, the Ethernet Transceiver Driver belongs to the *Microcontroller Abstraction Layer*, or more precisely, to the *Communication Drivers*.

This indicates the main task of the Ethernet Transceiver Driver:
Provide to the upper layer (Ethernet Interface) a hardware independent interface comprising multiple equal transceivers. This interface shall be uniform for all transceivers. Thus, the upper layer (Ethernet Interface) may access the underlying bus system in a uniform manner. The configuration of the Ethernet Transceiver Driver however is bus specific, since it takes into account the specific features of the communication transceiver.

A single Ethernet Transceiver Driver module supports only one type of transceiver hardware, but several transceivers of the same type. The Ethernet Transceiver Driver's prefix requires a unique namespace. The Ethernet Interface can access different Ethernet controller types using different Ethernet Transceiver Drivers using this prefix. The decision which driver to use to access a particular transceiver is a configuration parameter of the Ethernet Interface.

Figure 1.1 depicts the lower part of the Ethernet stack. One Ethernet Interface accesses several transceivers using one or several Ethernet Transceiver Drivers.

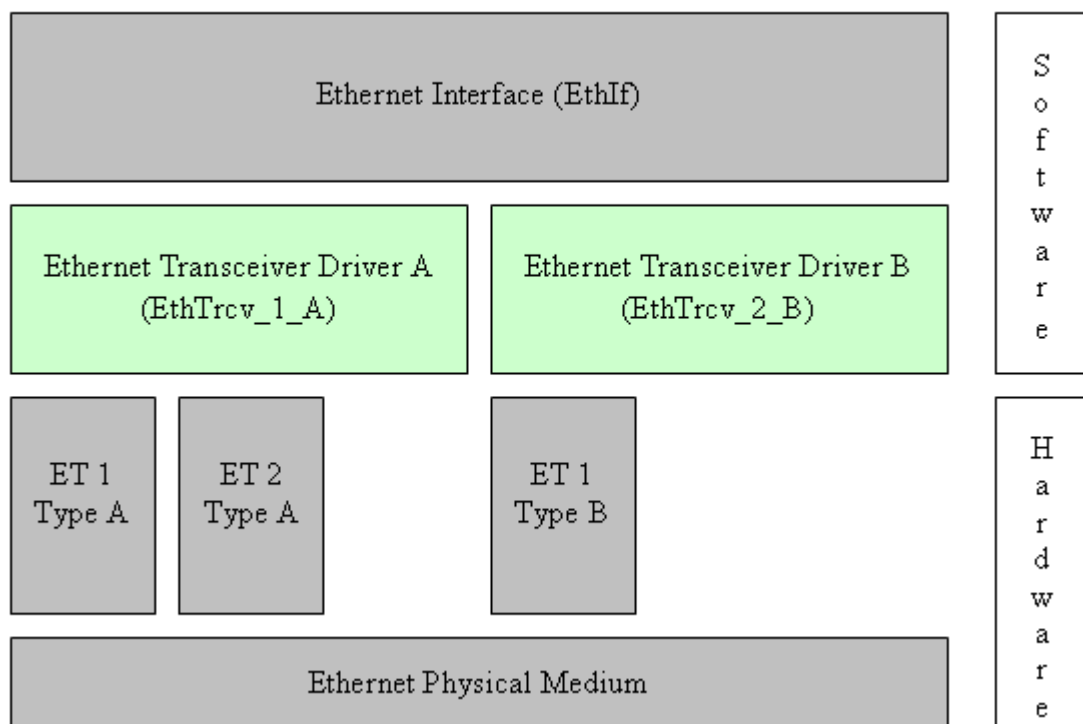


Figure 1.1: Ethernet stack module overview

Note: The Ethernet Transceiver Driver is specified in a way that allows for object code delivery of the code module, following the "one-fits-all" principle, i.e. the entire configuration of the Ethernet Interface can be carried out without modifying any source code. Thus, the configuration of the Ethernet Transceiver Driver can be carried out largely without detailed knowledge of the Ethernet Transceiver Driver software.

2 Acronyms and abbreviations

Abbreviation / Acronym:	Description:
EC	Ethernet controller
ET	Ethernet transceiver
Eth	Ethernet Controller Driver (AUTOSAR BSW module)
EthIf	Ethernet Interface (AUTOSAR BSW module)
EthTrcv	Ethernet Transceiver Driver (AUTOSAR BSW module)
MCG	Module Configuration Generator
MII	Media Independent Interface (standardized Interface provided by Ethernet controllers to access Ethernet transceivers, see [21])

3 Related documentation

3.1 Input documents

- [1] List of Basic Software Modules
AUTOSAR_TR_BSWModuleList.pdf
- [2] Layered Software Architecture
AUTOSAR_EXP_LayeredSoftwareArchitecture.pdf
- [3] AUTOSAR General Requirements on Basic Software Modules
AUTOSAR_SRS_BSWGeneral.pdf
- [4] Specification of Communication
AUTOSAR_SWS_COM.pdf
- [5] Requirements on Ethernet Support in AUTOSAR
AUTOSAR_SRS_Ethernet.pdf
- [6] Specification of Ethernet Interface
AUTOSAR_SWS_EthernetInterface.pdf
- [7] Specification of Ethernet State Manager
AUTOSAR_SWS_EthernetStateManager.pdf
- [8] Specification of Ethernet Interface
AUTOSAR_SWS_EthernetInterface.pdf
- [9] Specification of Socket Adapter
AUTOSAR_SWS_SocketAdapter.pdf
- [10] Specification of UDP Network Management
AUTOSAR_SWS_UDPNetworkManagement.pdf
- [11] Specification of PDU Router
AUTOSAR_SWS_PDURouter.pdf
- [12] BSW Scheduler Specification
AUTOSAR_SWS_Scheduler.pdf
- [13] Specification of ECU Configuration
AUTOSAR_TPS_ECUConfiguration.pdf
- [14] Specification of Memory Mapping
AUTOSAR_SWS_MemoryMapping.pdf
- [15] Specification of Standard Types
AUTOSAR_SWS_StandardTypes.pdf

- [16] Specification of Default Error Tracer
AUTOSAR_SWS_DefaultErrorTracer.pdf
- [17] Specification of Diagnostics Event Manager
AUTOSAR_SWS_DiagnosticEventManager
- [18] Specification of ECU State Manager
AUTOSAR_SWS_ECUStateManager.pdf
- [19] General Specification of Basic Software Modules
AUTOSAR_SWS_BSWGeneral.pdf

3.2 Related standards and norms

- [20] IEC 7498-1 The Basic Model, IEC Norm, 1994
- [21] IEEE 802.3-2006

3.3 Related specification

AUTOSAR provides a General Specification on Basic Software modules [19] (SWS BSW General), which is also valid for Ethernet Transceiver Driver.

Thus, the specification SWS BSW General shall be considered as additional and required specification for Ethernet Transceiver Driver.

4 Constraints and assumptions

4.1 Limitations

The Ethernet Transceiver Driver module is only able to handle a single thread of execution. The execution must not be pre-empted by itself.

4.2 Applicability to car domains

The Ethernet BSW stack is intended to be used wherever high data rates are required but no hard real-time is required. Of course, it can also be used for less-demanding use cases, i.e. for low data rates.

5 Dependencies to other modules

This chapter lists the modules interacting with the Ethernet Transceiver Driver module.

Modules that use Ethernet Transceiver Driver module:

- Ethernet Interface (EthIf)

Modules used by the Ethernet Transceiver Driver module:

- Ethernet Controller Driver (Eth) for transceiver access via Media Independent Interface (MII).

Dependencies to other Modules:

- On certain systems the transceiver might share resources with other components (e.g. the MCU, Port), and may depend on their configuration. If those resources are within scope of the other modules (e.g. PLL configuration, memory mapping, etc.) the Ethernet Transceiver Driver module does not take care of configuring those components but requires their preceding initialization.

5.1 File structure

5.1.1 Header file structure

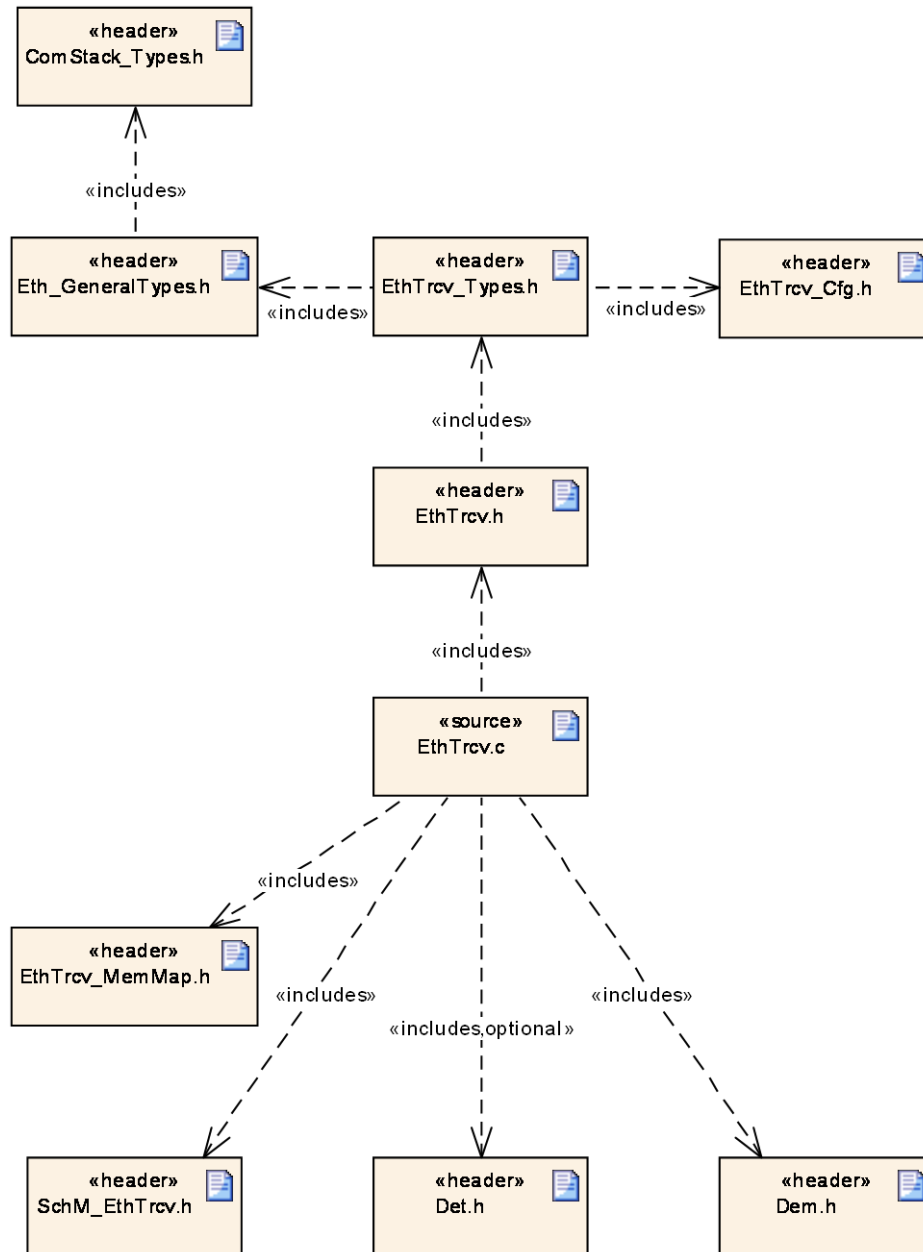


Figure 5.1: Ethernet Transceiver Driver file structure

6 Requirements traceability

Requirement	Description	Satisfied by
SRS_Eth_00106	The Ethernet Transceiver Driver shall switch on/off wake up functionality at pre compile time.	SWS_EthTrcv_00124, SWS_EthTrcv_00139
SRS_Eth_00107	The Ethernet Transceiver Driver shall support access to the wake up reason.	SWS_EthTrcv_00135
SRS_Eth_00108	The Ethernet Transceiver Driver shall be able to wake-up the bus.	SWS_EthTrcv_00118
SRS_Eth_00117	The Ethernet Transceiver Driver shall provide access to standardized hardware features	SWS_EthTrcv_00147, SWS_EthTrcv_00149, SWS_EthTrcv_91001, SWS_EthTrcv_91002, SWS_EthTrcv_91003, SWS_EthTrcv_91004, SWS_EthTrcv_91005, SWS_EthTrcv_91006, SWS_EthTrcv_91007, SWS_EthTrcv_91008, SWS_EthTrcv_91009, SWS_EthTrcv_91010

7 Functional specification

7.1 Ethernet BSW stack

As part of the AUTOSAR Layered Software Architecture according to Figure 7.1, the Ethernet BSW modules also form a layered software stack. Figure 7.1 depicts the basic structure of this Ethernet BSW stack. The EthIf module accesses several transceivers using the Ethernet Transceiver Driver layer, which can be made up of several Ethernet Transceiver Drivers modules.

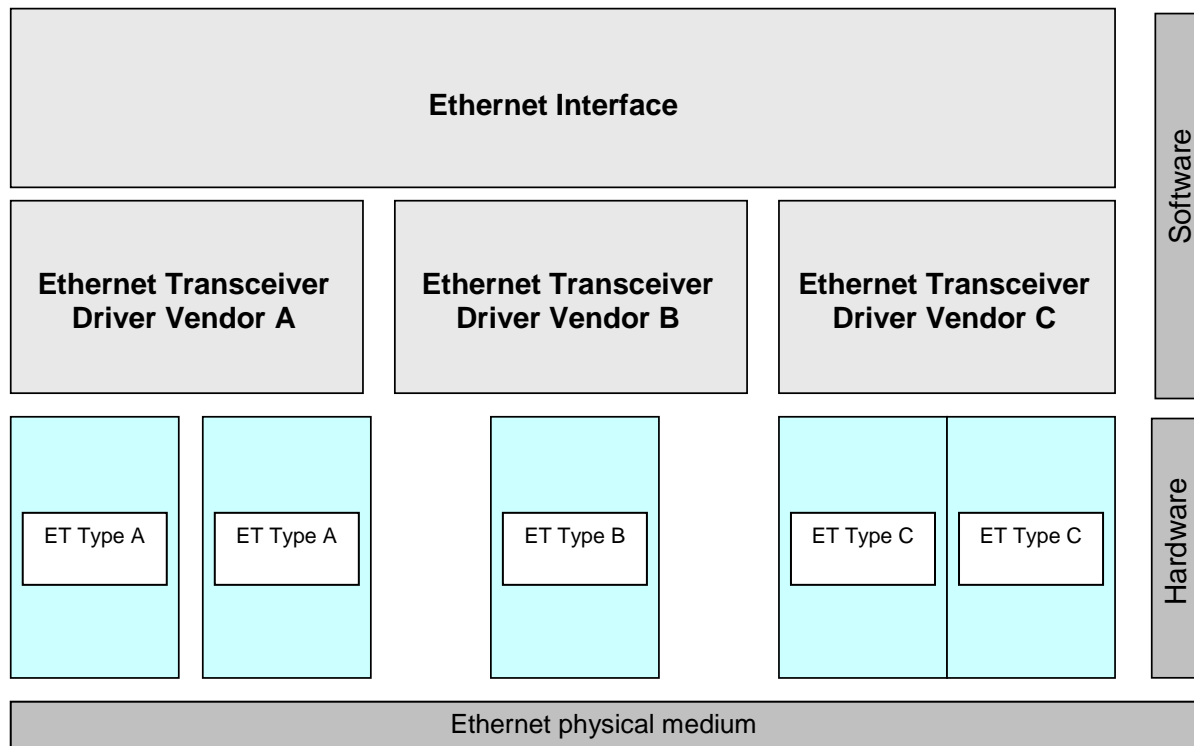


Figure 7.1: Basic Structure of the Ethernet BSW stack

7.1.1 Indexing scheme

Users of the Ethernet Transceiver Driver identify transceiver resources using an indexing scheme as depicted in Figure 7.2.

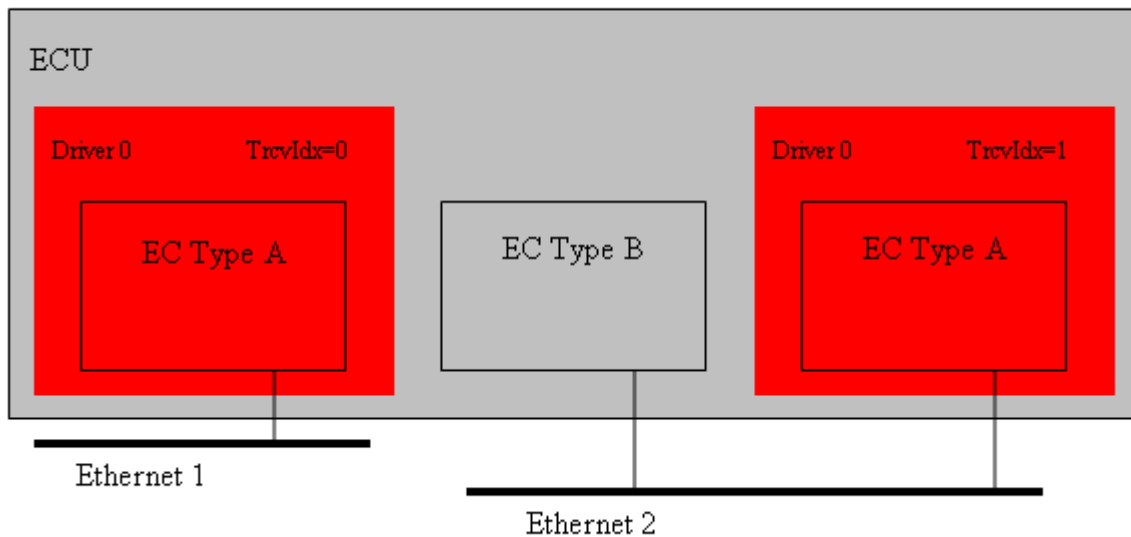


Figure 7.2: Ethernet Transceiver Driver indexing scheme

[SWS_EthTrcv_00003] [

The Ethernet Transceiver Driver is using a zero-based index to abstract the access for upper software layers. The parameter `EthTrcv_CtrlIdx` within configuration corresponds to parameter `TrcvIdx` used in the API.]()

7.1.2 Requirements

This chapter lists requirements that shall be fulfilled by Ethernet Transceiver Driver module implementations.

The Ethernet Interface module environment comprises all modules which are calling interfaces of the Ethernet Interface module.

[SWS_EthTrcv_00004] [

The Ethernet Transceiver Driver module shall support pre-compile time, link time and post-build time configuration.]()

[SWS_EthTrcv_00005] [

The header file *EthTrcv.h* shall include a software and specification version number.]()

[SWS_EthTrcv_00006] [

The Ethernet Transceiver Driver module shall perform a consistency check between code files and header files based on pre-process-checking the version numbers of related code files and header files.]()

[SWS_EthTrcv_00007] [

In case default error detection is enabled for the Ethernet Transceiver Driver module:
The Ethernet Transceiver Driver module shall check API parameters for validity and report detected errors to the DET.]()

DET API functions are specified in [16].

[SWS_EthTrcv_00009] [

The Ethernet Transceiver Driver module shall implement the API functions specified by the Ethernet Transceiver Driver SWS as real C-code functions and shall not implement the API as macros for object code deliveries.]()

[SWS_EthTrcv_00010] [

None of the Ethernet Transceiver Driver module header files shall define global variables.]()

7.1.3 Configuration description

[SWS_EthTrcv_00011] [

The Ethernet Transceiver Driver module shall provide an XML file that contains the data, which is required for the SW identification (it shall contain the vendor identification, module ID and software version information), configuration and integration process. This file should describe vendor specific configuration parameters as well as it should contain recommended configuration parameter values.]()

[SWS_EthTrcv_00012] [

The MCG shall read the ECU configuration description of the Ethernet Driver module(s). Ethernet Driver related configuration data is contained in the Ethernet Driver module configuration description.]()

[SWS_EthTrcv_00013] [

The MCG shall ensure the consistency of the generated configuration data.]()

[SWS_EthTrcv_00014] [

The configuration of the Ethernet Transceiver Driver module shall be calculated at ECU configuration time. None of the communication parameters shall be calculated at runtime.]()

[SWS_EthTrcv_00015] [

The start address of post-build time configuration data shall be passed during module initialization (see chapter 8.3.1).]()

An assignment of those configuration classes to configuration parameters can be found in chapter 10.

A detailed description of all Ethernet Transceiver Driver related configuration parameters can be found in chapter 10 of this document.

7.1.4 Wake-up support

[SWS_EthTrcv_00110] [

The Ethernet Transceiver driver shall support wake up depending on the configuration parameter EthTrcvWakeUpSupport either not at all (ETHTRCV_WAKEUP_NOT_SUPPORTED) or by Interrupt (ETHTRCV_WAKEUP_BY_INTERRUPT) or by polling (ETHTRCV_WAKEUP_BY_POLLING).]()

Note: If the Ethernet Transceiver driver detects a wakeup it will map the wake-up reason provided by the transceiver hardware to wake-up events defined by EcuM. The Ethernet Transceiver driver will support the following scenarios:

- Sleeping ECU and sleeping bus -> wake up detection via EthTrcv_Init (called during Power On)
- Awake ECU and sleeping bus -> wake up detection via EthTrcv_MainFunction or Wake up interrupt handler (checked by EcuM within CheckWakeup)

[SWS_EthTrcv_00111] [

If the wake-up mode of the corresponding transceiver is ETHTRCV_WUM_ENABLE and transceiver is requested to low power mode (ETHTRCV_MODE_DOWN), the transceiver driver shall enable the corresponding ICU channel (see EthTrcvIcuChannelRef) by calling Icu_EnableNotification.]()

[SWS_EthTrcv_00112] [

If the wake-up mode of the corresponding transceiver is ETHTRCV_WUM_ENABLE and transceiver is requested to active (ETHTRCV_MODE_ACTIVE), the transceiver driver shall disable the corresponding ICU channel (see EthTrcvIcuChannelRef) by calling Icu_DisableNotification.]()

[SWS_EthTrcv_00146] [

The Wake up interrupt handler (if present) shall clear the interrupt and identify the wake up reason and store it.]()

7.2 Error classification

7.2.1 Default Errors

[SWS_EthTrcv_00017] [

Type or error	Relevance	Related error code	Value [hex]
Invalid transceiver index	Default error	ETHTRCV_E_INV_TRCV_IDX	0x01
EthTrcv module was not initialized	Default error	ETHTRCV_E_NOT_INITIALIZED	0x02
Invalid pointer in parameter list	Default error	ETHTRCV_E_PARAM_POINTER	0x03

]()

7.2.2 Runtime Errors

There are no runtime errors.

7.2.3 Transient Faults

There are no transient faults.

7.2.4 Production Errors

There are no production errors.

7.2.5 Extended Production Errors

Extended production errors are handled as events of the Diagnostic Event Manager. The event IDs are defined in the following tables, while the actual values are assigned externally by the configuration of the Diagnostic Event Manager, and are included in the module via Dem.h.

[SWS_EthTrcv_00105] [

Error Name:	ETHTRCV_E_ACCESS	
Short Description:	Ethernet Transceiver Access Failure.	
Long Description:	Monitors the access to the Ethernet Transceiver.	
Detection Criteria:	Fail	When access to the Ethernet Transceiver fails the module shall report the extended production error with event status DEM_EVENT_STATUS_PREFAILED to DEM.
	Pass	When access to the Ethernet Transceiver succeeds the module shall report the extended production error with event status DEM_EVENT_STATUS_PREPASSED to DEM.
Secondary Parameters:	None.	
Time Required:	None.	
Monitor Frequency	None.	

]0

8 API specification

8.1 Imported types

This chapter lists all types included from the following files:

[SWS_EthTrcv_00027] [

Module	Imported Type
ComStack_Types	BufReq_ReturnType
Dem	Dem_EventIdType
	Dem_EventStatusType
EcuM	EcuM_WakeupSourceType
Eth_GeneralTypes	EthTrcv_BaudRateType
	EthTrcv_CableDiagResultType
	EthTrcv_ConfigType
	EthTrcv_DuplexModeType
	EthTrcv_LinkStateType
	EthTrcv_ModeType
	EthTrcv_PhyLoopbackModeType
	EthTrcv_PhyTestModeType
	EthTrcv_PhyTxModeType
	EthTrcv_WakeupModeType
	Eth_BufIdxType
	Eth_ConfigType
	Eth_FrameType
	Eth_ModeType
	Eth_RxStatusType
Icu	Icu_ChannelType
Std_Types	Std_ReturnType
	Std_VersionInfoType

] ()

8.2 Type definitions

[SWS_EthTrcv_00095] [

EthTrcv.h shall include Eth_GeneralTypes.h for include of general EthTrcv type declarations.]()

[SWS_EthTrcv_00096] [

The types specified in SWS_EthernetTransceiverDriver shall be declared in Eth_GeneralTypes.h.]()

8.2.1 EthTrcv_ConfigType

[SWS_EthTrcv_00098] [

Name:	EthTrcv_ConfigType
Type:	Structure
Range:	Implementation specific.
Description:	Implementation specific structure of the post build configuration

] ()

8.2.2 EthTrcv_ModeType

[SWS_EthTrcv_00099] [

Name:	EthTrcv_ModeType		
Type:	Enumeration		
Range:	ETHTRCV_MODE_DOWN	0x00	Transceiver disabled
	ETHTRCV_MODE_ACTIVE	0x01	Transceiver enabled
Description:	This type defines the transceiver modes		

] ()

8.2.3 EthTrcv_LinkStateType

[SWS_EthTrcv_00100] [

Name:	EthTrcv_LinkStateType		
Type:	Enumeration		
Range:	ETHTRCV_LINK_STATE_DOWN	0x00	No physical Ethernet connection established
	ETHTRCV_LINK_STATE_ACTIVE	0x01	Physical Ethernet connection established
Description:	This type defines the Ethernet link state. The link state changes after an Ethernet cable gets plugged in and the transceivers on both ends negotiated the transmission parameters (i.e. baud rate and duplex mode)		

] ()

8.2.4 EthTrcv_StateType

[SWS_EthTrcv_00101] [

Name:	EthTrcv_StateType		
Type:	Enumeration		
Range:	ETHTRCV_STATE_UNINIT	0x00	Driver is not yet configured
	ETHTRCV_STATE_INIT	0x01	Driver is configured
Description:	Status supervision used for Development Error Detection. The state shall be available for debugging.		

] ()

8.2.5 EthTrcv_BaudRateType

[SWS_EthTrcv_00102] [

Name:	EthTrcv_BaudRateType		
Type:	Enumeration		
Range:	ETHTRCV_BAUD_RATE_10MBIT	0x00	10MBIT Ethernet connection
	ETHTRCV_BAUD_RATE_100MBIT	0x01	100MBIT Ethernet connection
	ETHTRCV_BAUD_RATE_1000MBIT	0x02	1000MBIT Ethernet connection
Description:	This type defines the Ethernet baud rate. The baud rate gets either negotiated between the connected transceivers or has to be configured.		

] ()

8.2.6 EthTrcv_DuplexModeType

[SWS_EthTrcv_00103] [

Name:	EthTrcv_DuplexModeType		
Type:	Enumeration		
Range:	ETHTRCV_DUPLEX_MODE_HALF	0x00	Half duplex Ethernet connection
	ETHTRCV_DUPLEX_MODE_FULL	0x01	Full duplex Ethernet connection

Description:	This type defines the Ethernet duplex mode. The duplex mode gets either negotiated between the connected transceivers or has to be configured.
---------------------	--

] ()

8.2.7 EthTrcv_WakeupModeType

[SWS_EthTrcv_00113] [

Name:	EthTrcv_WakeupModeType		
Type:	Enumeration		
Range:	ETHTRCV_WUM_DISABLE	0x00	Transceiver wake up disabled
	ETHTRCV_WUM_ENABLE	0x01	Transceiver wake up enabled
	ETHTRCV_WUM_CLEAR	0x02	Transceiver wake up reason cleared.
Description:	This type controls the transceiver wake up modes and/or clears the wake-up reason.		

] ()

8.2.8 EthTrcv_WakeupReasonType

[SWS_EthTrcv_00114] [

Name:	EthTrcv_WakeupReasonType		
Type:	Enumeration		
Range:	ETHTRCV_WUR_NONE	0x00	No wake up reason detected.
	ETHTRCV_WUR_GENERAL	0x01	General wake up detected, no distinct reason supported by hardware.
	ETHTRCV_WUR_BUS	0x02	Bus wake up detected. Available if supported by hardware.
	ETHTRCV_WUR_INTERNAL	0x03	Internal wake up detected. Available if supported by hardware.
	ETHTRCV_WUR_RESET	0x04	Reset wake up detected. Available if supported by hardware.
	ETHTRCV_WUR_POWER_ON	0x05	Power on wake up detected. Available if supported by hardware.
	ETHTRCV_WUR_PIN	0x06	Pin wake up detected. Available if supported by hardware.
	ETHTRCV_WUR_SYSERR	0x07	System error wake up detected. Available if supported by hardware.
Description:	This type defines the transceiver wake up reasons.		

] ()

8.2.9 EthTrcv_PhyTestModeType

[SWS_EthTrcv_91002] [

Name:	EthTrcv_PhyTestModeType		
Type:	Enumeration		
Range:	ETHTRCV_PHYTESTMODE_NONE	0x00	normal operation
	ETHTRCV_PHYTESTMODE_1	0x01	test transmitter droop
	ETHTRCV_PHYTESTMODE_2	0x02	test master timing jitter
	ETHTRCV_PHYTESTMODE_3	0x03	test slave timing jitter
	ETHTRCV_PHYTESTMODE_4	0x04	test transmitter distortion
	ETHTRCV_PHYTESTMODE_5	0x05	test power spectral density (PSD) mask
Description:	Describes the possible PHY test modes		

] (SRS_Eth_00117)

8.2.10 EthTrcv_PhyLoopbackModeType

[SWS_EthTrcv_91004] [

Name:	EthTrcv_PhyLoopbackModeType		
Type:	Enumeration		
Range:	ETHTRCV_PHYLOOPBACK_NONE	0x00	normal operation
	ETHTRCV_PHYLOOPBACK_INTERNAL	0x01	internal loopback
	ETHTRCV_PHYLOOPBACK_EXTERNAL	0x02	external loopback
	ETHTRCV_PHYLOOPBACK_REMOTE	0x03	remote loopback
Description:	Describes the possible PHY loopback modes		

] (SRS_Eth_00117)

8.2.11 EthTrcv_PhyTxModeType

[SWS_EthTrcv_91006] [

Name:	EthTrcv_PhyTxModeType		
Type:	Enumeration		
Range:	ETHTRCV_PHYTXMODE_NORMAL	0x00	normal operation
	ETHTRCV_PHYTXMODE_TX_OFF	0x01	transmitter disabled
	ETHTRCV_PHYTXMODE_SCRAMBLER_OFF	0x02	scrambler disabled
Description:	Describes the possible PHY transmit modes		

] (SRS_Eth_00117)

8.2.12 EthTrcv_CableDiagResultType

[SWS_EthTrcv_91008] [

Name:	EthTrcv_CableDiagResultType		
Type:	Enumeration		
Range:	ETHTRCV_CABLEDIAG_OK	0x00	Cable diagnostic ok
	ETHTRCV_CABLEDIAG_ERROR	0x01	Cable diagnostic failed
	ETHTRCV_CABLEDIAG_SHORT	0x02	Short circuit detected
	ETHTRCV_CABLEDIAG_OPEN	0x03	Open circuit detected
Description:	Describes the results of the cable diagnostics.		

] (SRS_Eth_00117)

8.3 Function definitions

This is a list of functions provided for upper layer modules.

8.3.1 EthTrcv_Init

[SWS_EthTrcv_00028] [

Service name:	EthTrcv_Init	
Syntax:	<pre>void EthTrcv_Init(const EthTrcv_ConfigType* CfgPtr)</pre>	
Service ID[hex]:	0x01	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	CfgPtr	Points to the implementation specific structure
Parameters (inout):	None	
Parameters (out):	None	
Return value:	None	
Description:	Initializes the Ethernet Transceiver Driver	

] ()

[SWS_EthTrcv_00029] [

The function shall store the access to the configuration structure for subsequent API calls.]()

[SWS_EthTrcv_00035] [

The function shall:

- Configure all transceiver configuration parameters (e.g. baud rate, duplex mode, automatic negotiation, ...)]()

[SWS_EthTrcv_00030] [

The function shall change the state of the component from ETHTRCV_STATE_UNINIT to ETHTRCV_STATE_INIT.]()

[SWS_EthTrcv_00115] [

If the wake-up mode of the corresponding transceiver is ETHTRCV_WUM_ENABLE the function shall check for wake-up reasons and propagate the corresponding wake-up source (see EthTrcvWakeupMap configuration) to the EcuM by calling EcuM_SetWakeupEvent.]()

[SWS_EthTrcv_00040] [

The function shall check the access to the Ethernet transceiver. If the check fails, the function shall raise the production error ETHTRCV_E_ACCESS and return E_NOT_OK, otherwise pass the production error ETHTRCV_E_ACCESS and return E_OK.]()

[SWS_EthTrcv_00032] [

Caveat: The API has to be called during initialization.]()

8.3.2 EthTrcv_SetTransceiverMode

[SWS_EthTrcv_00042] [

Service name:	EthTrcv_SetTransceiverMode	
Syntax:	Std_ReturnType EthTrcv_SetTransceiverMode(uint8 TrcvIdx, EthTrcv_ModeType CtrlMode)	
Service ID[hex]:	0x03	
Sync/Async:	Asynchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
	CtrlMode	ETHTRCV_MODE_DOWN: disable the transceiver ETHTRCV_MODE_ACTIVE: enable the transceiver
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: Service accepted E_NOT_OK: Service denied
Description:	Enables / disables the indexed transceiver	

] ()

[SWS_EthTrcv_00043] [

The function shall put the index transceiver in the specified mode and indicate the new mode by the API EthIf_TrcvModeIndication latest during the next EthTrcv_MainFunction.]()

[SWS_EthTrcv_00117] [

If the wake up mode of the corresponding transceiver is ETHTRCV_WUM_ENABLE and the function is called with ETHTRCV_MODE_DOWN, it shall set the transceiver into a mode (e.g. sleep mode) where wakeups can be detected.]()

[SWS_EthTrcv_00118] [

If EthTrcv_SetTransceiverMode() is called with parameter ETHTRCV_MODE_ACTIVE, the Ethernet Transceiver driver shall
(*) check for wake-up reasons when entering the transceiver's active mode.
(*) In case no wake-up reason has been detected, the Ethernet transceiver shall send a wake-up symbol on the bus if configured.
(*) Invoke the call-out <EthTrcvWakeUpCallout> function if configured.
](SRS_Eth_00108)

[SWS_EthTrcv_00044] [

If default error detection is enabled: the function shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00045] [

If default error detection is enabled: the function shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00046] [

The function shall be pre compile time configurable On/Off by the configuration parameter: EthTrcvSetTransceiverModeApi.]()

[SWS_EthTrcv_00094] [

If the transceiver is already in the requested mode E_OK shall be returned and no default error shall be raised.]()

[SWS_EthTrcv_00104] [

The function shall check the access to the Ethernet transceiver. If the check fails, the function shall raise the production error ETHTRCV_E_ACCESS and return E_NOT_OK, otherwise pass the production error ETHTRCV_E_ACCESS and return E_OK.]()

[SWS_EthTrcv_00047] [

Caveat: The function requires previous transceiver initialization (EthTrcv_Init).]()

8.3.3 EthTrcv_GetTransceiverMode

[SWS_EthTrcv_00048] [

Service name:	EthTrcv_GetTransceiverMode	
Syntax:	<pre>Std_ReturnType EthTrcv_GetTransceiverMode(uint8 TrcvIdx, EthTrcv_ModeType* TrcvModePtr)</pre>	
Service ID[hex]:	0x04	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	TrcvModePtr	ETHTRCV_MODE_DOWN: the transceiver is disabled ETHTRCV_MODE_ACTIVE: the transceiver is enable
Return value:	Std_ReturnType	E_OK: success E_NOT_OK: transceiver could not be initialized
Description:	Obtains the state of the indexed transceiver	

] () [SWS_EthTrcv_00049] [

The function shall read the current transceiver mode.]()

[SWS_EthTrcv_00050] [

If default error detection is enabled: the function shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00051] [

If default error detection is enabled: the function shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00052] [

If default error detection is enabled: the function shall check the parameter TrcvModePtr for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_PARAM_POINTER otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00053] [

The function shall be pre compile time configurable On/Off by the configuration parameter: EthTrcvGetTransceiverModeApi.]()

[SWS_EthTrcv_00054] [

Caveat: The function requires previous transceiver initialization (EthTrcv_Init).]()

8.3.4 EthTrcv_SetTransceiverWakeupMode

[SWS_EthTrcv_00119] [

Service name:	EthTrcv_SetTransceiverWakeupMode	
Syntax:	<pre>Std_ReturnType EthTrcv_SetTransceiverWakeupMode(uint8 TrcvIdx, EthTrcv_WakeupModeType TrcvWakeupMode)</pre>	

Service ID[hex]:	0x0d	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
	TrcvWakeupMode	ETHTRCV_WUM_DISABLE: disable transceiver wake up ETHTRCV_WUM_ENABLE: enable transceiver wake up ETHTRCV_WUM_CLEAR: clears transceiver wake up reason
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: transceiver wake up mode has been changed. E_NOT_OK: transceiver wake up mode could not be changed or the wake-up reason could not be cleared.
Description:	Enables / disables the wake-up mode or clear the wake-up reason of the indexed transceiver	

] ()

[SWS_EthTrcv_00120] [

If function EthTrcv_SetTransceiverWakeupMode() is called with ETHTRCV_WUM_DISABLE or ETHTRCV_WUM_ENABLE it shall put the indexed transceiver in the specified wake up mode.]()

[SWS_EthTrcv_00121] [

If function EthTrcv_SetTransceiverWakeupMode() is called with ETHTRCV_WUM_CLEAR it shall clear stored wakeup events on the indexed transceiver.]()

[SWS_EthTrcv_00122] [

If default error detection is enabled: The function EthTrcv_SetTransceiverWakeupMode() shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00123] [

If default error detection is enabled: The function EthTrcv_SetTransceiverWakeupMode() shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00124] [

The function EthTrcv_SetTransceiverWakeupMode() shall be only available if EthTrcvWakeUpSupport is not disabled (set to ETHTRCV_WAKEUP_NOT_SUPPORTED).] (SRS_Eth_00106)

[SWS_EthTrcv_00125] [

If the transceiver is already in the requested wake-up mode, E_OK shall be returned and no default error shall be raised.]()

[SWS_EthTrcv_00126] [

Caveat: The function EthTrcv_SetTransceiverWakeupMode() requires previous transceiver initialization (EthTrcv_Init).]()

8.3.5 EthTrcv_GetTransceiverWakeupMode

[SWS_EthTrcv_00127] [

Service name:	EthTrcv_GetTransceiverWakeupMode	
Syntax:	<pre>Std_ReturnType EthTrcv_GetTransceiverWakeupMode(uint8 TrcvIdx, EthTrcv_WakeupModeType* TrcvWakeupModePtr)</pre>	
Service ID[hex]:	0x0e	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	TrcvWakeupModePtr	ETHTRCV_WUM_DISABLE: transceiver wake up is disabled ETHTRCV_WUM_ENABLE: transceiver wake up is enabled
Return value:	Std_ReturnType	E_OK: success E_NOT_OK: transceiver wake up mode could not be obtained
Description:	Returns the wake up mode of the indexed transceiver	

] ()

[SWS_EthTrcv_00128] [

The function EthTrcv_GetTransceiverWakeupMode() shall read the current transceiver wake up mode and provide it into TrcvWakeupModePtr.]()

[SWS_EthTrcv_00129] [

If default error detection is enabled: The function EthTrcv_GetTransceiverWakeupMode() shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00130] [

If default error detection is enabled: The function EthTrcv_GetTransceiverWakeupMode() shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00131] [

If default error detection is enabled: The function EthTrcv_GetTransceiverWakeupMode() shall check the parameter TrcvWakeupModePtr for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_POINTER otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00132] [

The function EthTrcv_GetTransceiverWakeupMode() shall be only available if EthTrcvGetTransceiverWakeupModeApi is set to TRUE.]()

[SWS_EthTrcv_00133] [

Caveat: The function `EthTrcv_GetTransceiverWakeupMode()` requires previous transceiver initialization (`EthTrcv_Init`). `()`

8.3.6 EthTrcv_CheckWakeup

[SWS_EthTrcv_00134] [

Service name:	EthTrcv_CheckWakeup	
Syntax:	<pre>Std_ReturnType EthTrcv_CheckWakeup(uint8 TrcvIdx)</pre>	
Service ID[hex]:	0x0f	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: The function has been successfully executed E_NOT_OK: The function could not be successfully executed
Description:	Service is called by EthIf in case a wake-up interrupt is detected.	

`()`

[SWS_EthTrcv_00135] [

If the wake-up mode of the corresponding transceiver is `ETHTRCV_WUM_ENABLE` the function `EthTrcv_CheckWakeup()` shall check if a wake up has been detected and if yes propagate the corresponding wake up source (see `EthTrcvWakeupMap` configuration) to the EcuM by calling `EcuM_SetWakeupEvent`. `](SRS_Eth_00107)`

[SWS_EthTrcv_00136] [

If the wake-up mode of the corresponding transceiver is not `ETHTRCV_WUM_ENABLE`, the function `EthTrcv_CheckWakeup()` shall return `E_OK`. `]()`

[SWS_EthTrcv_00137] [

If default error detection is enabled: The function `EthTrcv_CheckWakeup()` shall check that the service `EthTrcv_Init` was previously called. If the check fails, the function shall raise the default error `ETHTRCV_E_NOT_INITIALIZED` otherwise (if DET is disabled) return `E_NOT_OK`. `]()`

[SWS_EthTrcv_00138] [

If default error detection is enabled: The function `EthTrcv_CheckWakeup()` shall check the parameter `TrcvIdx` for being valid. If the check fails, the function shall raise the default error `ETHTRCV_E_INV_TRCV_IDX` otherwise (if DET is disabled) return `E_NOT_OK`. `]()`

[SWS_EthTrcv_00139] [

The function `EthTrcv_CheckWakeup()` shall be only available if `EthTrcvWakeUpSupport` is something else than `ETHTRCV_WAKEUP_NOT_SUPPORTED`. `](SRS_Eth_00106)`

[SWS_EthTrcv_00140] [

Caveat: The function `EthTrcv_CheckWakeup()` requires previous transceiver initialization (`EthTrcv_Init`). `()`

8.3.7 EthTrcv_StartAutoNegotiation

[SWS_EthTrcv_00055] [

Service name:	EthTrcv_StartAutoNegotiation	
Syntax:	<pre>Std_ReturnType EthTrcv_StartAutoNegotiation(uint8 TrcvIdx)</pre>	
Service ID[hex]:	0x05	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: success E_NOT_OK: transceiver could not be initialized
Description:	Restarts the negotiation of the transmission parameters used by the indexed transceiver	

] () [SWS_EthTrcv_00056] [

The function shall restart the automatic negotiation of the transmission parameters used by the indexed transceiver. `()`

[SWS_EthTrcv_00057] [

If default error detection is enabled: the function shall check that the service `EthTrcv_Init` was previously called. If the check fails, the function shall raise the default error `ETHTRCV_E_NOT_INITIALIZED` otherwise (if DET is disabled) return `E_NOT_OK`. `()`

[SWS_EthTrcv_00058] [

If default error detection is enabled: the function shall check the parameter `TrcvIdx` for being valid. If the check fails, the function shall raise the default error `ETHTRCV_E_INV_TRCV_IDX` otherwise (if DET is disabled) return `E_NOT_OK`. `()`

[SWS_EthTrcv_00059] [

The function shall be pre compile time configurable On/Off by the configuration parameter: `EthTrcvStartAutoNegotiationApi`. `()`

[SWS_EthTrcv_00060] [

Caveat: The function requires previous transceiver initialization (`EthTrcv_Init`). `()`

[SWS_EthTrcv_00088] [

Caveat: The function is not required or called by an upper layer BSW software component. `()`

8.3.8 EthTrcv_GetLinkState

[SWS_EthTrcv_00061] [

Service name:	EthTrcv_GetLinkState	
Syntax:	<pre>Std_ReturnType EthTrcv_GetLinkState(uint8 TrcvIdx, EthTrcv_LinkStateType* LinkStatePtr)</pre>	
Service ID[hex]:	0x06	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	LinkStatePtr	ETHTRCV_LINK_STATE_DOWN: transceiver is disconnected ETHTRCV_LINK_STATE_ACTIVE: transceiver is connected
Return value:	Std_ReturnType	E_OK: success E_NOT_OK: transceiver could not be initialized
Description:	Obtains the link state of the indexed transceiver	

] () [SWS_EthTrcv_00062] [

The function shall read the current transceiver link state.]()

[SWS_EthTrcv_00063] [

If default error detection is enabled: the function shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00064] [

If default error detection is enabled: the function shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00065] [

If default error detection is enabled: the function shall check the parameter LinkStatePtr for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_PARAM_POINTER otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00066] [

The function shall be pre compile time configurable On/Off by the configuration parameter: EthTrcvGetLinkStateApi.]()

[SWS_EthTrcv_00067] [

Caveat: The function requires previous transceiver initialization (EthTrcv_Init).]()

8.3.9 EthTrcv_GetBaudRate

[SWS_EthTrcv_00068] [

Service name:	EthTrcv_GetBaudRate	
Syntax:	<pre>Std_ReturnType EthTrcv_GetBaudRate(uint8 TrcvIdx, EthTrcv_BaudRateType* BaudRatePtr)</pre>	

Service ID[hex]:	0x07	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	BaudRatePtr	ETHTRCV_BAUD_RATE_10MBIT: 10MBit connection ETHTRCV_BAUD_RATE_100MBIT: 100MBit connection ETHTRCV_BAUD_RATE_1000MBIT: 1000MBit connection
Return value:	Std_ReturnType	E_OK: success E_NOT_OK: transceiver could not be initialized
Description:	Obtains the baud rate of the indexed transceiver	

] () [SWS_EthTrcv_00069] [

The function shall read the current transceiver baud rate.]()

[SWS_EthTrcv_00070] [

If default error detection is enabled: the function shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00071] [

If default error detection is enabled: the function shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00072] [

If default error detection is enabled: the function shall check the parameter BaudRatePtr for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_PARAM_POINTER otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00073] [

The function shall be pre compile time configurable On/Off by the configuration parameter: EthTrcvGetBaudRateApi.]()

[SWS_EthTrcv_00074] [

Caveat: The function requires previous transceiver initialization (EthTrcv_Init).]()

[SWS_EthTrcv_00089] [

Caveat: The function is not required or called by an upper layer BSW software component.]()

8.3.10 EthTrcv_GetDuplexMode

[SWS_EthTrcv_00075] [

Service name:	EthTrcv_GetDuplexMode
Syntax:	Std_ReturnType EthTrcv_GetDuplexMode(uint8 TrcvIdx, EthTrcv_DuplexModeType* DuplexModePtr

)	
Service ID[hex]:	0x08	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	DuplexModePtr	ETHTRCV_DUPLEX_MODE_HALF: half duplex connections ETHTRCV_DUPLEX_MODE_FULL: full duplex connection
Return value:	Std_ReturnType	E_OK: success E_NOT_OK: transceiver could not be initialized
Description:	Obtains the duplex mode of the indexed transceiver	

] () [SWS_EthTrcv_00076] [

The function shall read the current transceiver duplex mode.]()

[SWS_EthTrcv_00077] [

If default error detection is enabled: the function shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00078] [

If default error detection is enabled: the function shall check the parameter TrcvIdx for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_INV_TRCV_IDX otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00079] [

If default error detection is enabled: the function shall check the parameter DuplexModePtr for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_PARAM_POINTER otherwise (if DET is disabled) return E_NOT_OK.]()

[SWS_EthTrcv_00080] [

The function shall be pre compile time configurable On/Off by the configuration parameter: EthTrcvGetDuplexModeApi.]()

[SWS_EthTrcv_00081] [

Caveat: The function requires previous transceiver initialization (EthTrcv_Init).]()

[SWS_EthTrcv_00090] [

Caveat: The function is not required or called by an upper layer BSW software component.]()

8.3.11 EthTrcv_SetPhyTestMode

[SWS_EthTrcv_91003] [

Service name:	EthTrcv_SetPhyTestMode
Syntax:	Std_ReturnType EthTrcv_SetPhyTestMode(uint8 TrcvIdx, EthTrcv_PhyTestModeType Mode

)	
Service ID[hex]:	0x11	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant for different Trcvldx. Non reentrant for the same Trcvldx.	
Parameters (in):	Trcvldx	Index of the transceiver within the context of the Ethernet Transceiver Driver
	Mode	Test mode to be activated
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: The request has been accepted E_NOT_OK: The request has not been accepted.
Description:	Activates a given test mode.	

] (SRS_Eth_00117)

[SWS_EthTrcv_00147]

If default error detection is enabled: the function EthTrcv_SetPhyTestMode shall check the parameter Mode for being supported by the hardware. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_SUPPORTED.]
(SRS_Eth_00117)

8.3.12 EthTrcv_SetPhyLoopbackMode

[SWS_EthTrcv_91005]

Service name:	EthTrcv_SetPhyLoopbackMode	
Syntax:	Std_ReturnType EthTrcv_SetPhyLoopbackMode(uint8 TrcvIdx, EthTrcv_PhyLoopbackModeType Mode)	
Service ID[hex]:	0x12	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant for different TrcvIdx. Non reentrant for the same TrcvIdx.	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
	Mode	Loopback mode to be activated
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: The request has been accepted E_NOT_OK: The request has not been accepted.
Description:	Activates a given loopback mode.	

] (SRS_Eth_00117)

[SWS_EthTrcv_00149]

If default error detection is enabled: the function EthTrcv_SetPhyLoopbackMode shall check the parameter Mode for being supported by the hardware. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_SUPPORTED.] (SRS_Eth_00117)

8.3.13 EthTrcv_GetPhySignalQuality

[SWS_EthTrcv_91001]

Service name:	EthTrcv_GetPhySignalQuality
----------------------	-----------------------------

Syntax:	Std_ReturnType EthTrcv_GetPhySignalQuality(uint8 TrcvIdx, uint8* SignalQualityPtr)	
Service ID[hex]:	0x10	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant for different TrcvIdx. Non reentrant for the same TrcvIdx.	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	SignalQualityPtr	Pointer to the memory where the signal quality in percent shall be stored.
Return value:	Std_ReturnType	E_OK: The request has been accepted E_NOT_OK: The request has not been accepted.
Description:	Obtains the current signal quality of the link of the indexed transceiver	

] (SRS_Eth_00117)

8.3.14 EthTrcv_SetPhyTxMode

[SWS_EthTrcv_91007] [

Service name:	EthTrcv_SetPhyTxMode	
Syntax:	Std_ReturnType EthTrcv_SetPhyTxMode(uint8 TrcvIdx, EthTrcv_PhyTxModeType Mode)	
Service ID[hex]:	0x13	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant for different TrcvIdx. Non reentrant for the same TrcvIdx.	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
	Mode	Transmission mode to be activated
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: The request has been accepted E_NOT_OK: The request has not been accepted
Description:	Activates a given transmission mode.	

] (SRS_Eth_00117)

[SWS_EthTrcv_00148][

If default error detection is enabled: the function EthTrcv_SetPhyTxMode shall check the parameter Mode for being supported by the hardware. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_SUPPORTED.] ()

8.3.15 EthTrcv_GetCableDiagnosticsResult

[SWS_EthTrcv_91009] [

Service name:	EthTrcv_GetCableDiagnosticsResult	
Syntax:	Std_ReturnType EthTrcv_GetCableDiagnosticsResult(uint8 TrcvIdx, EthTrcv_CableDiagResultType* ResultPtr)	
Service ID[hex]:	0x14	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant for different TrcvIdx. Non reentrant for the same TrcvIdx.	

Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	ResultPtr	Pointer to the location where the cable diagnostics result shall be stored
Return value:	Std_ReturnType	E_OK: The request has been accepted E_NOT_OK: The request has not been accepted
Description:	Retrieves the cable diagnostics result of a given transceiver.	

] (SRS_Eth_00117)

8.3.16 EthTrcv_GetPhyIdentifier

[SWS_EthTrcv_91010] [

Service name:	EthTrcv_GetPhyIdentifier	
Syntax:	<pre>Std_ReturnType EthTrcv_GetPhyIdentifier(uint8 TrcvIdx, uint32* OrgUniqueIdPtr, uint8* ModelNrPtr, uint8* RevisionNrPtr)</pre>	
Service ID[hex]:	0x15	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant for different TrcvIdx. Non reentrant for the same TrcvIdx.	
Parameters (in):	TrcvIdx	Index of the transceiver within the context of the Ethernet Transceiver Driver
Parameters (inout):	None	
Parameters (out):	OrgUniqueIdPtr	Pointer to the memory where the Organizationally Unique Identifier shall be stored.
	ModelNrPtr	Pointer to the memory where the Manufacturer's Model Number shall be stored.
	RevisionNrPtr	Pointer to the memory where the Revision Number shall be stored.
Return value:	Std_ReturnType	E_OK: The request has been accepted E_NOT_OK: The request has not been accepted
Description:	Obtains the PHY identifier of the Ethernet Transceiver according to IEEE 802.3-2015 chapter 22.2.4.3.1 PHY Identifier.	

] (SRS_Eth_00117)

8.3.17 EthTrcv_GetVersionInfo

[SWS_EthTrcv_00082] [

Service name:	EthTrcv_GetVersionInfo	
Syntax:	<pre>void EthTrcv_GetVersionInfo(Std_VersionInfoType* VersionInfoPtr)</pre>	
Service ID[hex]:	0x0b	
Sync/Async:	Synchronous	
Reentrancy:	Reentrant	
Parameters (in):	None	
Parameters (inout):	None	
Parameters (out):	VersionInfoPtr	Version information of this module
Return value:	None	

Description:	Returns the version information of this module
---------------------	--

] ()

[SWS_EthTrcv_00093] [

If default error detection is enabled: the function shall check the parameter VersionInfoPtr for being valid. If the check fails, the function shall raise the default error ETHTRCV_E_PARAM_POINTER.]()

8.4 Callback notifications

8.4.1 EthTrcv_ReadMiiIndication

[SWS_EthTrcv_00108] [

Service name:	EthTrcv_ReadMiiIndication		
Syntax:	<pre>void EthTrcv_ReadMiiIndication(uint8 CtrlIdx, uint8 TrcvIdx, uint8 RegIdx, uint8 RegVal)</pre>		
Service ID[hex]:	0x09		
Sync/Async:	Synchronous		
Reentrancy:	Non Reentrant for the same CtrlIdx, reentrant for different		
Parameters (in):	CtrlIdx	Index of the controller within the context of the Ethernet Driver	
	TrcvIdx	Index of the transceiver on the MII	
	RegIdx	Index of the transceiver register on the MII	
	RegVal	Value contained in the indexed register	
Parameters (inout):	None		
Parameters (out):	None		
Return value:	None		
Description:	Called when information has been read out via MII interface. Triggered by previous Eth_ReadMii call. Can directly be called within Eth_ReadMii.		

] ()

8.4.2 EthTrcv_WriteMiiIndication

[SWS_EthTrcv_00109] [

Service name:	EthTrcv_WriteMiiIndication		
Syntax:	<pre>void EthTrcv_WriteMiiIndication(uint8 CtrlIdx, uint8 TrcvIdx, uint8 RegIdx)</pre>		
Service ID[hex]:	0x0a		
Sync/Async:	Synchronous		
Reentrancy:	Non Reentrant for the same CtrlIdx, reentrant for different		
Parameters (in):	CtrlIdx	Index of the controller within the context of the Ethernet Driver	
	TrcvIdx	Index of the transceiver on the MII	
	RegIdx	Index of the transceiver register on the MII	
Parameters (inout):	None		
Parameters (out):	None		

Return value:	None
Description:	Called when information has been written via MII interface. Triggered by previous Eth_WriteMii call. Can directly be called within Eth_WriteMii.

] ()

8.5 Interrupt service routines

The Ethernet Transceiver Driver does not provide any interrupt service routines.

8.6 Scheduled functions

8.6.1 EthTrcv_MainFunction

[SWS_EthTrcv_00106] [

Service name:	EthTrcv_MainFunction
Syntax:	void EthTrcv_MainFunction(void)
Service ID[hex]:	0x0c
Description:	Used for polling state changes and wakeup reasons. Calls EthIf_TrcvModeIndication when the transceiver mode changed. Stores wakeup events if EthTrcvWakeUpSupport is set to ETHTRCV_WAKEUP_BY_POLLING.

] () [SWS_EthTrcv_00107] [

Used for polling state changes. Calls EthIf_TrcvModeIndication when the transceiver mode changed.]()

[SWS_EthTrcv_00141] [

The function EthTrcv_MainFunction() shall check for wake up reasons and shall store wakeup events if EthTrcvWakeUpSupport is set to ETHTRCV_WAKEUP_BY_POLLING.]()

[SWS_EthTrcv_00142] [

If default error detection is enabled: The function EthTrcv_MainFunction() shall check that the service EthTrcv_Init was previously called. If the check fails, the function shall raise the default error ETHTRCV_E_NOT_INITIALIZED.]()

8.7 Expected Interfaces

This chapter lists all interfaces required from other modules.

8.7.1 Mandatory Interfaces

This chapter defines all interfaces required to fulfill the core functionality of the module.

[SWS_EthTrcv_00085] [

API function	Description
Dem_SetEventStatus	Called by SW-Cs or BSW modules to report monitor status information

	to the Dem. BSW modules calling Dem_SetEventStatus can safely ignore the return value.
Eth_GetControllerMode	Obtains the state of the indexed controller
Eth_GetPhysAddr	Obtains the physical source address used by the indexed controller
Eth_GetVersionInfo	Returns the version information of this module
Eth_Init	Initializes the Ethernet Driver
Eth_ProvideTxBuffer	Provides access to a transmit buffer of the FIFO related to the specified priority
Eth_ReadMii	Reads a transceiver register
Eth_Receive	Receive a frame from the related fifo.
Eth_SetControllerMode	Enables / disables the indexed controller
Eth_Transmit	Triggers transmission of a previously filled transmit buffer
Eth_TxConfirmation	Triggers frame transmission confirmation
Eth_WriteMii	Configures a transceiver register or triggers a function offered by the receiver
EthIf_TrcvModeIndication	Called asynchronously when mode has been read out. Triggered by previous Eth_SetTransceiverMode call. Can directly be called within the trigger functions.
SchM_Enter_EthTrcv	Invokes the SchM_Enter function to enter a module local exclusive area.
SchM_Exit_EthTrcv	Invokes the SchM_Exit function to exit an exclusive area.

] ()

8.7.2 Optional Interfaces

This chapter defines all interfaces required to fulfill an optional functionality of the module.

[SWS_EthTrcv_00086] [

API function	Description
Det_ReportError	Service to report development errors.
EcuM_SetWakeupEvent	Sets the wakeup event.
Icu_DisableNotification	This function disables the notification of a channel.
Icu_EnableNotification	This function enables the notification on the given channel.

] ()

8.7.3 Configurable interfaces

This chapter lists all interfaces with configurable target functions. The target function is usually a callback function. The function names are configurable.

[SWS_EthTrcv_00144] [

Service name:	<EthTrcvWakeUpCallout>	
Syntax:	void <EthTrcvWakeUpCallout>(uint8 TrcvIdx)	
Service ID[hex]:	0x11	
Sync/Async:	Asynchronous	
Reentrancy:	Non Reentrant Dont care	
Parameters (in):	TrcvIdx	Index of the Ethernet Transceiver
Parameters (inout):	None	
Parameters (out):	None	

Return value:	None
Description:	Indicates an wake-up request for the specified Ethernet Transceiver. Can be used to trigger integrator code that initiates a remote wake-up.

] ()

[SWS_EthTrcv_00145] [

The callback function shall be configurable by the configuration parameter:

EthTrcvWakeUpCallout.]()

9 Sequence diagrams

The usage of the Ethernet Transceiver Driver is depicted in the sequence diagrams of the Ethernet Interface.

10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. In order to support the specification Chapter 10.1 describes fundamentals. It also specifies a template (table) you shall use for the parameter specification. We intend to leave Chapter 10.1 in the specification to guarantee comprehension.

Chapter 10.2 specifies the structure (containers) and the parameters of the module Ethernet Transceiver Driver.

Chapter 10.3 specifies published information of the module Ethernet Transceiver Driver.

10.1 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe Chapters 7 and Chapter 10.

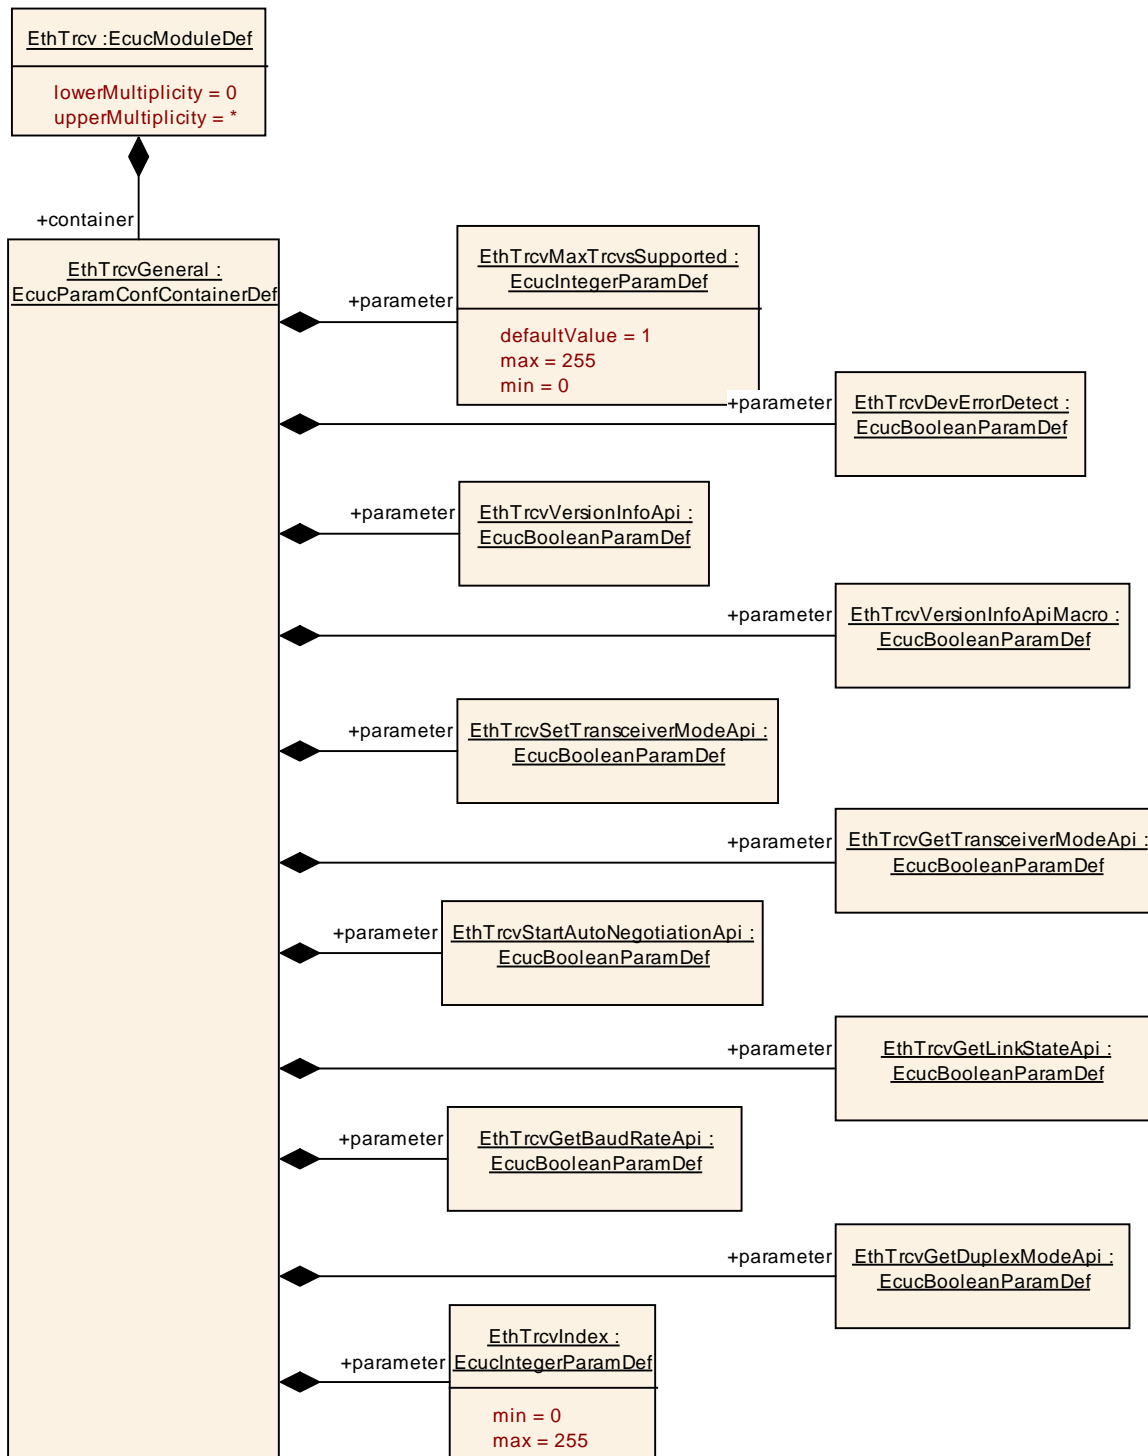


Figure 10.1: Ethernet Transceiver Driver configuration structure

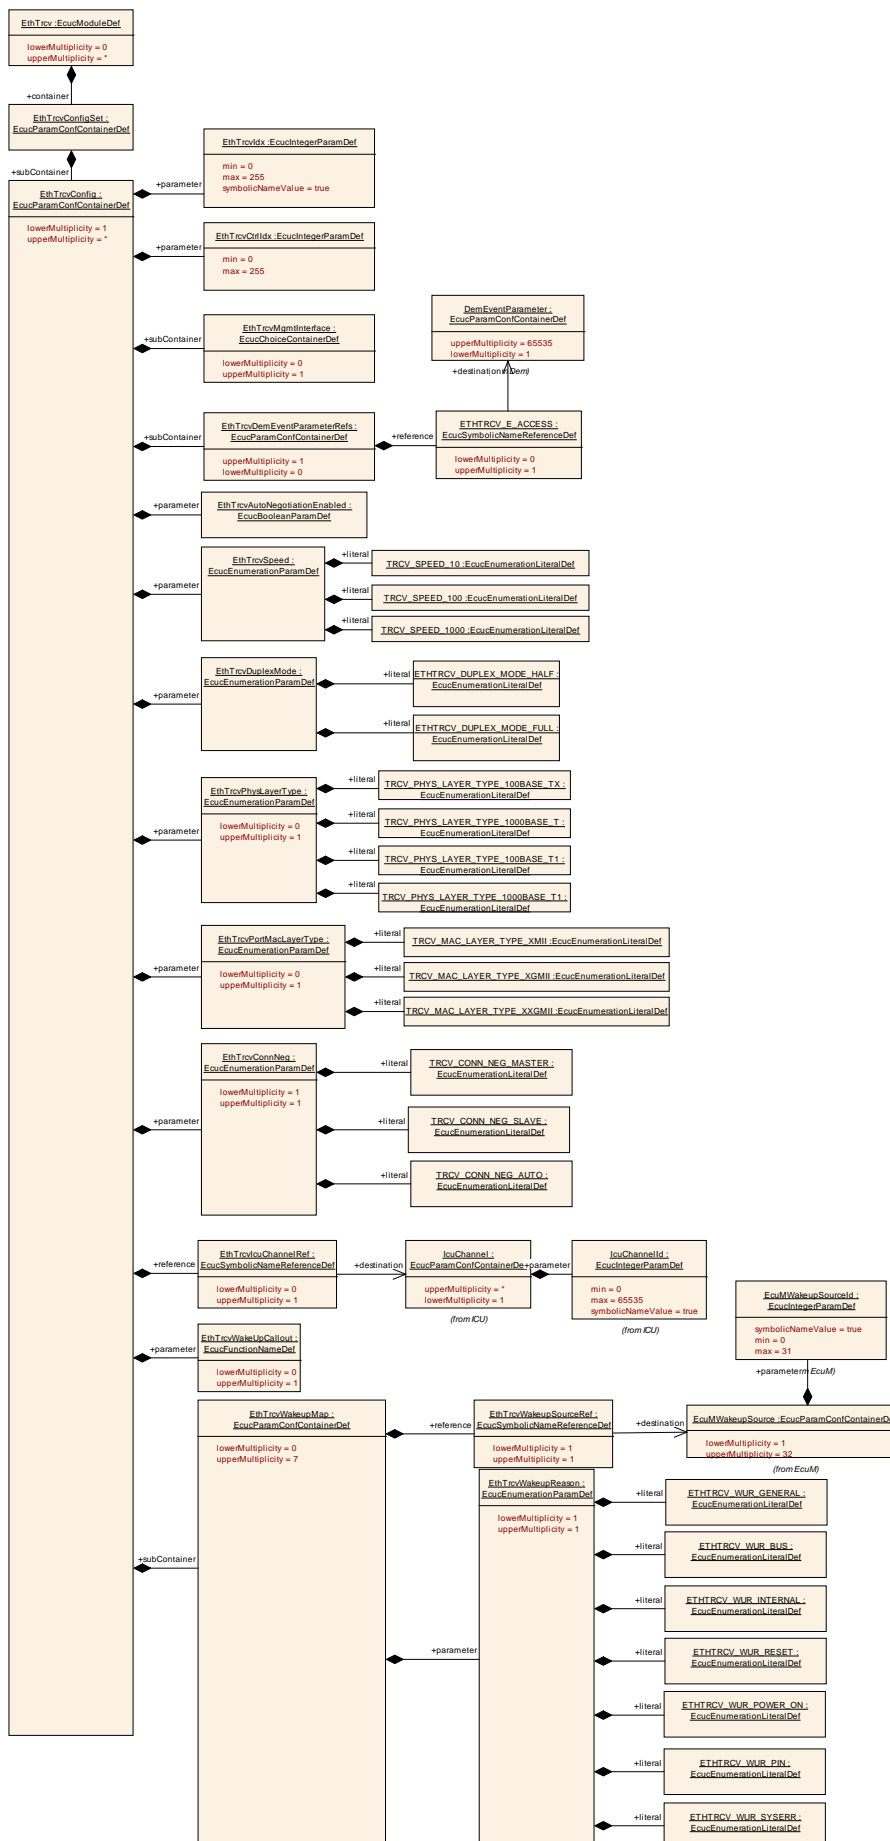


Figure 10.2: Ethernet Transceiver Driver Transceiver configuration structure

10.1.1 EthTrcv

SWS Item	ECUC_EthTrcv_00034 :
Module Name	<i>EthTrcv</i>
Module Description	Configuration of Ethernet Transceiver Driver module
Post-Build Variant Support	true
Supported Config Variants	VARIANT-LINK-TIME, VARIANT-POST-BUILD, VARIANT-PRE-COMPILE

Included Containers		
Container Name	Multiplicity	Scope / Dependency
EthTrcvConfigSet	1	This container contains the configuration parameters and sub containers of the AUTOSAR EthTrcv module.
EthTrcvGeneral	1	General configuration of Ethernet Transceiver Driver module

10.1.2 EthTrcvConfigSet

SWS Item	ECUC_EthTrcv_00016 :
Container Name	<i>EthTrcvConfigSet</i>
Description	This container contains the configuration parameters and sub containers of the AUTOSAR EthTrcv module.
Configuration Parameters	

Included Containers		
Container Name	Multiplicity	Scope / Dependency
EthTrcvConfig	1..*	Configuration of the individual transceiver

10.1.3 EthTrcvConfig

SWS Item	ECUC_EthTrcv_00012 :
Container Name	<i>EthTrcvConfig</i>
Description	Configuration of the individual transceiver
Configuration Parameters	

SWS Item	ECUC_EthTrcv_00021 :		
Name	<i>EthTrcvAutoNegotiationEnabled</i>		
Description	Specifies if Auto-Negotiation is enabled (TRUE) or disabled (FALSE) for determination of the Ethernet transceiver speed.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00025 :		
Name	<i>EthTrcvConnNeg</i>		
Description	Specifies the connection negotiation of the Ethernet transceiver link.		
Multiplicity	1		
Type	EcucEnumerationParamDef		

Range	TRCV_CONN_NEG_AUTO	Automatic Negotiation
	TRCV_CONN_NEG_MASTER	Master
	TRCV_CONN_NEG_SLAVE	Slave
Post-Build Variant Value	true	
Value Configuration Class	Pre-compile time	X VARIANT-PRE-COMPILE
	Link time	X VARIANT-LINK-TIME
	Post-build time	X VARIANT-POST-BUILD
Scope / Dependency	scope: local	

SWS Item	ECUC_EthTrcv_00014 :		
Name	EthTrcvCtrlIdx		
Description	Specifies the controller used for MII access to the transceiver		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00023 :		
Name	EthTrcvDuplexMode		
Description	Specifies the duplex mode of the Ethernet transceiver link if Auto-Negotiation is disabled. This parameter is ignored if Auto-Negotiation is enabled.		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	ETHTRCV_DUPLEX_MODE_FULL		Full duplex.
	ETHTRCV_DUPLEX_MODE_HALF		Half duplex.
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: EthTrcvAutoNegotiationEnabled		

SWS Item	ECUC_EthTrcv_00013 :		
Name	EthTrcvIdx		
Description	Specifies the instance ID of the configured transceiver.		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: ECU		

SWS Item	ECUC_EthTrcv_00024 :		
Name	EthTrcvPhysLayerType		
Description	Specifies the physical layer type of the Ethernet transceiver link.		

Multiplicity	0..1		
Type	EcucEnumerationParamDef		
Range	TRCV_PHYS_LAYER_TYPE_1000BASE_T	physical layer interface 1000BASE-T (1Gbit/s, 4 pairs). Used for consumer electronic.	
	TRCV_PHYS_LAYER_TYPE_1000BASE_T1	physical layer interface 1000BASE-T1 (1Gbit/s, 1 pair). Used for automotive.	
	TRCV_PHYS_LAYER_TYPE_100BASE_T1	physical layer interface 100BASE-T1 (100Mbit/s, 1 pair). Used for automotive.	
	TRCV_PHYS_LAYER_TYPE_100BASE_TX	physical layer interface 100BASE-TX (100Mbit/s, 2 pairs). Used for consumer electronic.	
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00035 :		
Name	EthTrcvPortMacLayerType		
Description	Defines the MAC layer type of the ethernet transceiver.		
Multiplicity	0..1		
Type	EcucEnumerationParamDef		
Range	TRCV_MAC_LAYER_TYPE_XGMII	MAC layer interface (data) bandwith class 1Gbit/s (e.g. GMII, RGMII, SGMII, RvGMII, USGMII)	
	TRCV_MAC_LAYER_TYPE_XMII	MAC layer interface (data) bandwith class 100Mbit/s (e.g. RMII, RvMII, SMII, RvMII)	
	TRCV_MAC_LAYER_TYPE_XXGMII	MAC layer interface (data) bandwith class 10Gbit/s	
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_EthTrcv_00022 :
-----------------	-----------------------------

Name	EthTrcvSpeed		
Description	Specifies the speed of the Ethernet transceiver link in [MBit/s]. If AutoNegotiation is enabled this is the maximum speed advertised for Auto-Negotiation.		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	TRCV_SPEED_10	10 MBit/s	
	TRCV_SPEED_100	100 MBit/s	
	TRCV_SPEED_1000	1000 MBit/s	
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: EthTrcvAutoNegotiationEnabled		

SWS Item	ECUC_EthTrcv_00028 :		
Name	EthTrcvWakeUpCallout		
Description	Configuration of the call-out name.		
Multiplicity	0..1		
Type	EcucFunctionNameDef		
Default value	--		
maxLength	--		
minLength	--		
regularExpression	--		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	dependency: Only valid if EthTrcvWakeUpSupport is not ETHTRCV_WAKEUP_NOT_SUPPORTED.		

SWS Item	ECUC_EthTrcv_00026 :		
Name	EthTrcvIcuChannelRef		
Description	Reference to the IcuChannel to enable/disable the interrupts for wakeups.		
Multiplicity	0..1		
Type	Symbolic name reference to [IcuChannel]		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

Included Containers		
Container Name	Multiplicity	Scope / Dependency
EthTrcvDemEventParameterRef	0..1	Container for the references to DemEventParameter

s		elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references.
EthTrcvMgmtInterface	0..1	The choice container allow to configure either the EthTrcv is accessed by a MII interface or Switch interface.
EthTrcvWakeupMap	0..7	Container for the mapping of wake up reasons to wake up sources. At least one container is needed if EthTrcvWakeUpSupport is not ETHTRCV_WAKEUP_NOT_SUPPORTED.

10.1.4 EthTrcvDemEventParameterRefs

SWS Item	ECUC_EthTrcv_00017 :
Container Name	EthTrcvDemEventParameterRefs
Description	Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references.
Configuration Parameters	

SWS Item	ECUC_EthTrcv_00018 :		
Name	ETHTRCV_E_ACCESS		
Description	Reference to the DemEventParameter which shall be issued when the error "Transceiver access failed" has occurred.		
Multiplicity	0..1		
Type	Symbolic name reference to [DemEventParameter]		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.1.5 EthTrcvMgmtInterface

SWS Item	ECUC_EthTrcv_00036 :		
Choice container Name	EthTrcvMgmtInterface		
Description	The choice container allow to configure either the EthTrcv is accessed by a MII interface or Switch interface.		
Post-Build Variant Multiplicity	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	

	Post-build time	--	
--	------------------------	----	--

Container Choices

Container Name	Multiplicity	Scope / Dependency
EthTrcvMiiInterface	0..1	This container includes the MII interface configuration between an Ethernet Controller and the Ethernet Transceiver. If this container is configured the EthTrcv shall call Eth_WriteMii / Eth_ReadMii API to access the hardware ethernet tranceiver.
EthTrcvSwitchInterface	0..1	This container includes the Switch interface configuration between an Ethernet Switch and an Ethernet Transceiver. If this container is configured the EthTrcv shall call EthSwt_WriteTrcvRegister / EthSwt_WriteTrcvRegister API to access the hardware ethernet transceiver.

10.1.6 EthTrcvMiiInterface

SWS Item	ECUC_EthTrcv_00037 :		
Container Name	EthTrcvMiiInterface		
Description	This container includes the MII interface configuration between an Ethernet Controller and the Ethernet Transceiver. If this container is configured the EthTrcv shall call Eth_WriteMii / Eth_ReadMii API to access the hardware ethernet tranceiver.		
Post-Build Variant Multiplicity	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Configuration Parameters			

SWS Item	ECUC_EthTrcv_00038 :		
Name	EthTrcvMiildx		
Description	Specifies the transceiver index used for MII access to the transceiver.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00039 :		
Name	EthTrcvMiiSelection		
Description	This parameter specifies the type of transceiver / controller interface. The interface is either MII, Light-MII or RGMII.		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	LIGHT_MII	--	
	MII	--	
	RGMII	--	
Post-Build Variant Value	false		
Value Configuration	Pre-compile time	X	All Variants
	Link time	--	

Class	Post-build time	--	
Scope / Dependency	scope: local		

No Included Containers

10.1.7 EthTrcvSwitchInterface

SWS Item	ECUC_EthTrcv_00040 :		
Container Name	EthTrcvSwitchInterface		
Description	This container includes the Switch interface configuration between an Ethernet Switch and an Ethernet Transceiver. If this container is configured the EthTrcv shall call EthSwt_WriteTrcvRegister / EthSwt_WriteTrcvRegister API to access the hardware ethernet transceiver.		
Post-Build Variant Multiplicity	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Configuration Parameters			

SWS Item	ECUC_EthTrcv_00042 :		
Name	EthTrcvSwitchPortRef		
Description	Reference to a switch port.		
Multiplicity	1		
Type	Symbolic name reference to [EthSwtPort]		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00041 :		
Name	EthTrcvSwitchRef		
Description	Reference to a switch configuration container.		
Multiplicity	1		
Type	Symbolic name reference to [EthSwtConfig]		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

No Included Containers

10.1.8 EthTrcvGeneral

SWS Item	ECUC_EthTrcv_00001 :
Container Name	EthTrcvGeneral
Description	General configuration of Ethernet Transceiver Driver module
Configuration Parameters	

SWS Item	ECUC_EthTrcv_00003 :		
Name	EthTrcvDevErrorDetect		
Description	Switches the development error detection and notification on or off. <ul style="list-style-type: none"> true: detection and notification is enabled. false: detection and notification is disabled. 		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00010 :		
Name	EthTrcvGetBaudRateApi		
Description	Enables / Disables EthTrcv_GetBaudRate API		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00011 :		
Name	EthTrcvGetDuplexModeApi		
Description	Enables / Disables EthTrcv_GetDuplexMode API		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00009 :		
Name	EthTrcvGetLinkStateApi		
Description	Enables / Disables EthTrcv_GetLinkState API		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00007 :		
Name	EthTrcvGetTransceiverModeApi		
Description	Enables / Disables EthTrcv_GetTransceiverMode API		

Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00031 :		
Name	EthTrcvGetTransceiverWakeupModeApi		
Description	Enables / Disables EthTrcv_GetTransceiverWakeupMode API		
Multiplicity	0..1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant	false		
Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local dependency: Only valid if EthTrcvWakeUpSupport is not ETHTRCV_WAKEUP_NOT_SUPPORTED		

SWS Item	ECUC_EthTrcv_00020 :		
Name	EthTrcvIndex		
Description	Specifies the InstanceId of this module instance. If only one instance is present it shall have the Id 0.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00032 :		
Name	EthTrcvMainFunctionPeriod		
Description	Specifies the period of main function EthTrcv_MainFunction in seconds.		
Multiplicity	0..1		
Type	EcucFloatParamDef		
Range]0 .. INF[
Default value	--		
Post-Build Variant	false		
Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants

	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00002 :		
Name	EthTrcvMaxTrcvSupported		
Description	--		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	1		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00006 :		
Name	EthTrcvSetTransceiverModeApi		
Description	Enables / Disables EthTrcv_SetTransceiverMode API		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00008 :		
Name	EthTrcvStartAutoNegotiationApi		
Description	Enables / Disables EthTrcv_StartAutoNegotiation API		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00004 :		
Name	EthTrcvVersionInfoApi		
Description	Enables / Disables version info API		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00005 :		
Name	EthTrcvVersionInfoApiMacro		

Description	Enables / Disables version info API macro implementation		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_EthTrcv_00030 :		
Name	EthTrcvWakeUpSupport		
Description	Configures wake-up to polling or interrupt or to not used/not supported. In case no wake up is supported by the hardware, the BSWMD pre-configuration shall be set to ETHTRCV_WAKEUP_NOT_SUPPORTED.		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	ETHTRCV_WAKEUP_BY_INTERRUPT	Wake up by interrupt	
	ETHTRCV_WAKEUP_BY_POLLING	Wake up by polling	
	ETHTRCV_WAKEUP_NOT_SUPPORTED	Wake up is not supported	
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

No Included Containers

11 Not applicable requirements

[SWS_EthTrcv_00999]

These requirements are not applicable to this specification (BSW00170).