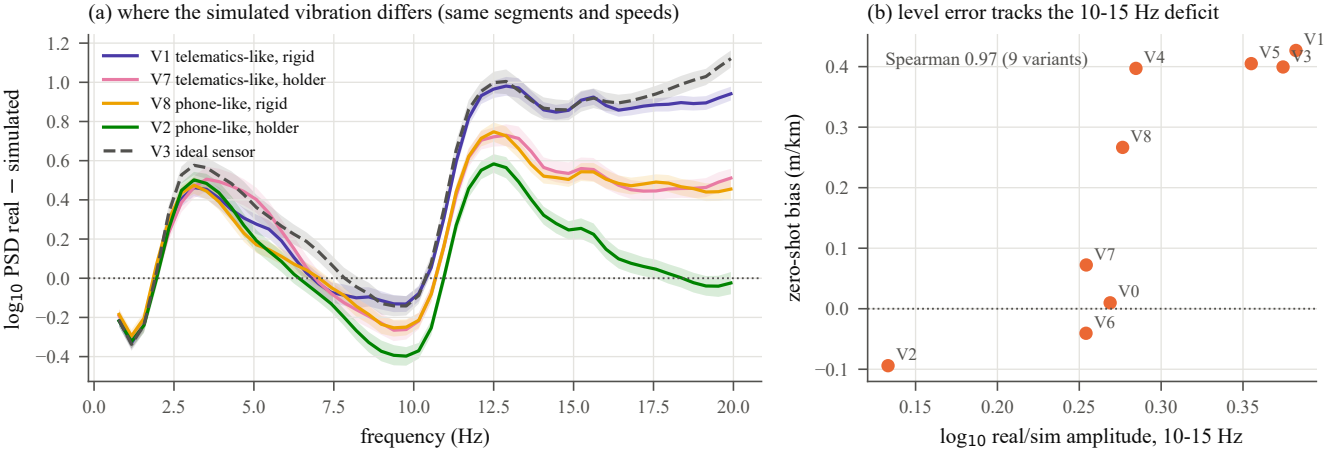
(a) where the simulated vibration differs (same segments and speeds)
V1 telematics-like, rigid
V7 telematics-like, holder
V8 phone-like, rigid
V2 phone-like, holder
V3 ideal sensor
log10 PSD real − simulated
frequency (Hz)
(b) level error tracks the 10-15 Hz deficit
Spearman 0.97 (9 variants)
zero-shot bias (m/km)
log10 real/sim amplitude, 10-15 Hz