


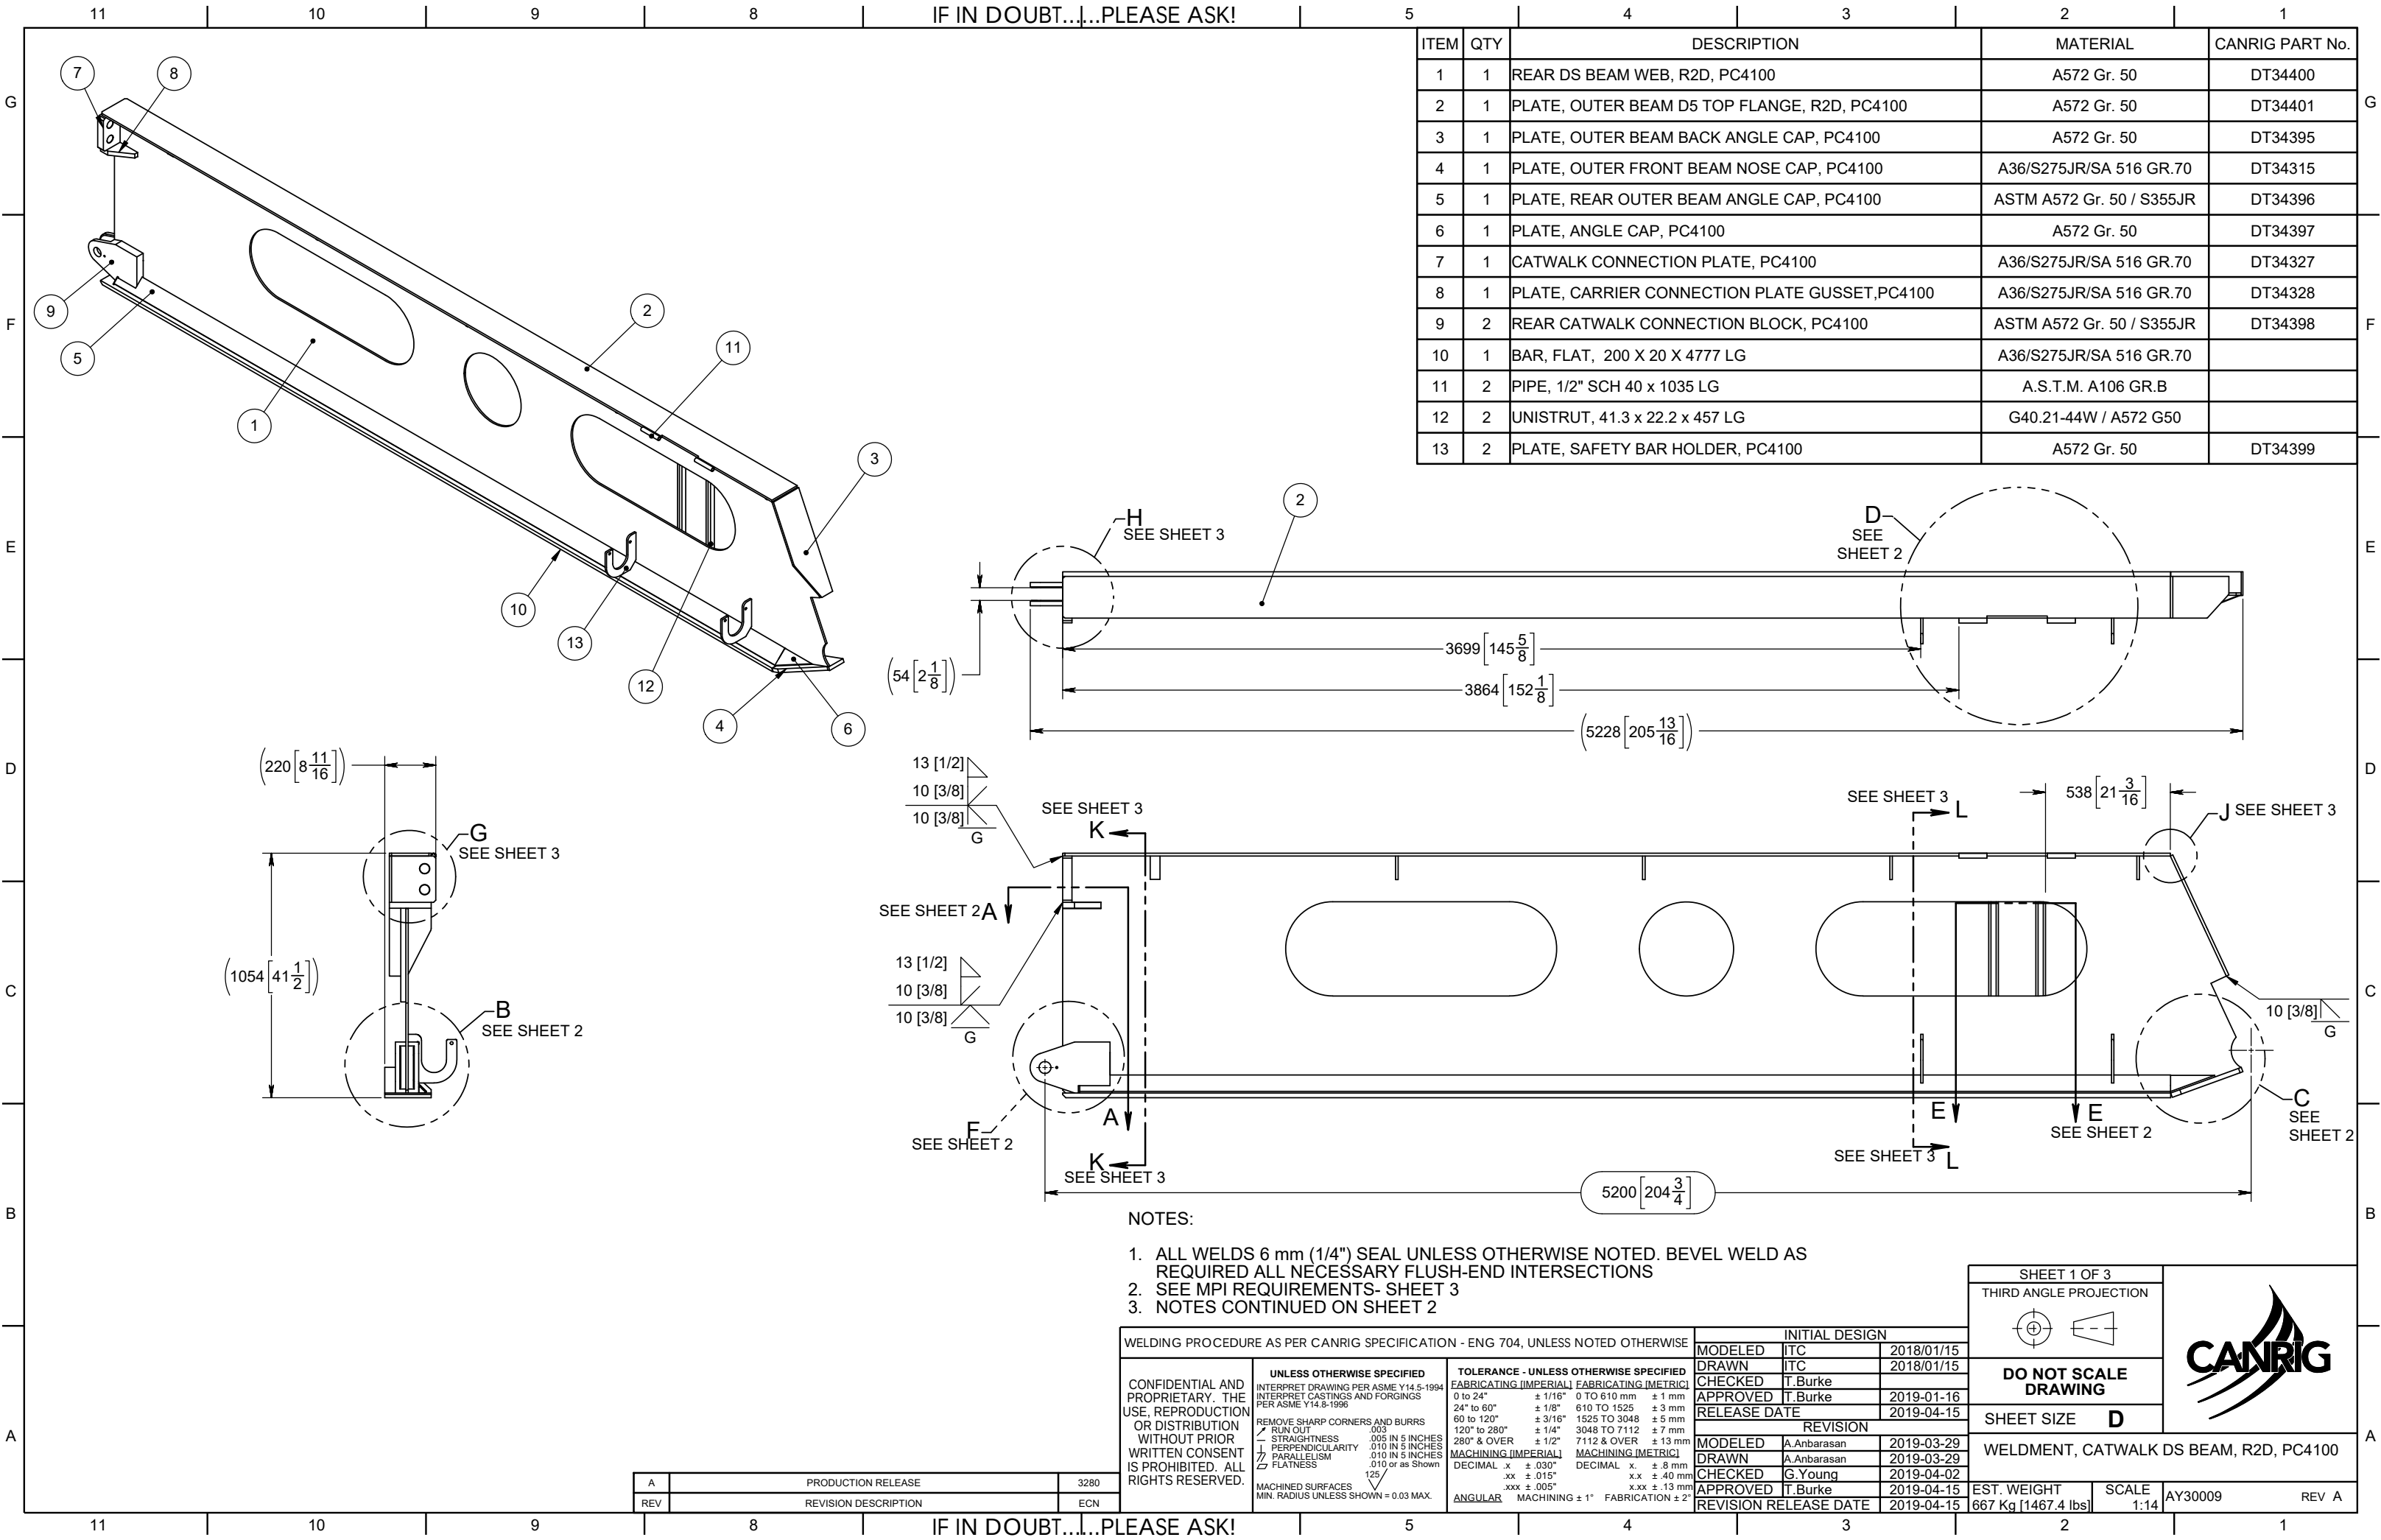

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	REAR DS BEAM WEB, R2D, PC4100	A572 Gr. 50	DT34400
2	1	PLATE, OUTER BEAM D5 TOP FLANGE, R2D, PC4100	A572 Gr. 50	DT34401
3	1	PLATE, OUTER BEAM BACK ANGLE CAP, PC4100	A572 Gr. 50	DT34395
4	1	PLATE, OUTER FRONT BEAM NOSE CAP, PC4100	A36/S275JR/SA 516 GR.70	DT34315
5	1	PLATE, REAR OUTER BEAM ANGLE CAP, PC4100	ASTM A572 Gr. 50 / S355JR	DT34396
6	1	PLATE, ANGLE CAP, PC4100	A572 Gr. 50	DT34397
7	1	CATWALK CONNECTION PLATE, PC4100	A36/S275JR/SA 516 GR.70	DT34327
8	1	PLATE, CARRIER CONNECTION PLATE GUSSET,PC4100	A36/S275JR/SA 516 GR.70	DT34328
9	2	REAR CATWALK CONNECTION BLOCK, PC4100	ASTM A572 Gr. 50 / S355JR	DT34398
10	1	BAR, FLAT, 200 X 20 X 4777 LG	A36/S275JR/SA 516 GR.70	
11	2	PIPE, 1/2" SCH 40 x 1035 LG	A.S.T.M. A106 GR.B	
12	2	UNISTRUT, 41.3 x 22.2 x 457 LG	G40.21-44W / A572 G50	
13	2	PLATE, SAFETY BAR HOLDER, PC4100	A572 Gr. 50	DT34399

NOTES:

1. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
2. SEE MPI REQUIREMENTS- SHEET 3
3. NOTES CONTINUED ON SHEET 2

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED
INTERPRET DRAWING PER ASME Y14.5-1994
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996

REMOVE SHARP CORNERS AND BURRS
Z RUN OUT .003
- STRAIGHTNESS .005 IN 5 INCHES
L PERPENDICULARITY .010 IN 5 INCHES
Z PARALLELISM .010 IN 5 INCHES
Z FLATNESS .010 or as Shown
125/
MACHINED SURFACES
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

TOLERANCE - UNLESS OTHERWISE SPECIFIED
FABRICATING [IMPERIAL] FABRICATING [METRIC]
0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm
24" to 60" ± 1/8" 610 TO 1525 ± 3 mm
60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm
120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm
280" & OVER ± 1/2" 7112 & OVER ± 13 mm
MACHINING [IMPERIAL] MACHINING [METRIC]
DECIMAL .x ± .030" DECIMAL .x ± .8 mm
.xx ± .015" .xx ± .40 mm
.xxx ± .005" .xxx ± .13 mm
ANGULAR MACHINING ± 1° FABRICATION ± 2°

INITIAL DESIGN		
MODELED	ITC	2018/01/15
DRAWN	ITC	2018/01/15
CHECKED	T.Burke	
APPROVED	T.Burke	2019-01-16
RELEASE DATE		2019-04-15
REVISION		
MODELED	A.Anbarasan	2019-03-29
DRAWN	A.Anbarasan	2019-03-29
CHECKED	G.Young	2019-04-02
APPROVED	T.Burke	2019-04-15
REVISION RELEASE DATE		2019-04-15

SHEET 1 OF 3
THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
SHEET SIZE **D**






WELDMENT, CATWALK DS BEAM, R2D, PC4100

EST. WEIGHT
667 Kg [1467.4 lbs]

SCALE
1:14

AY30009

REV A

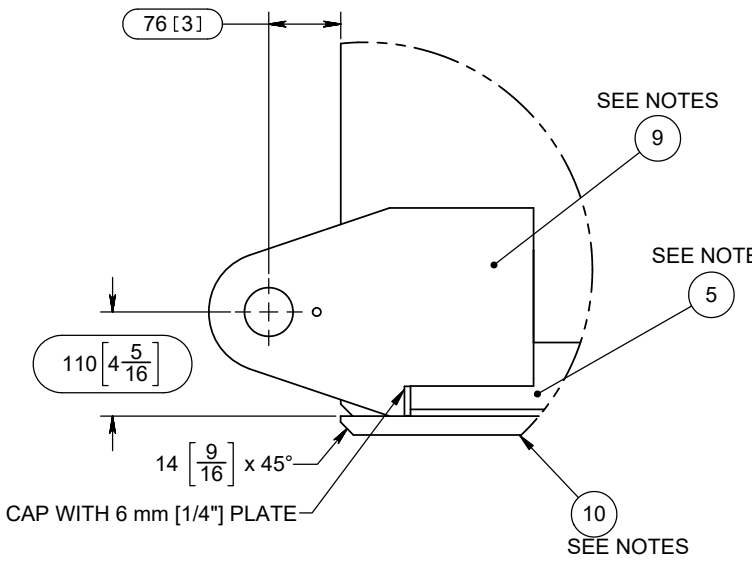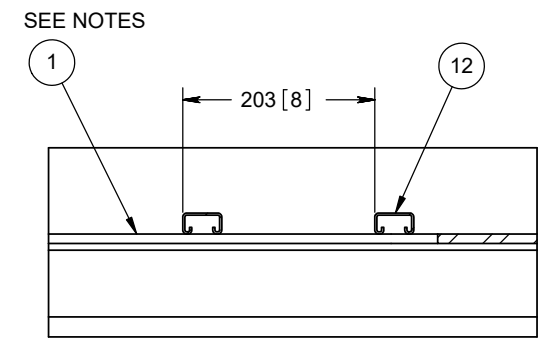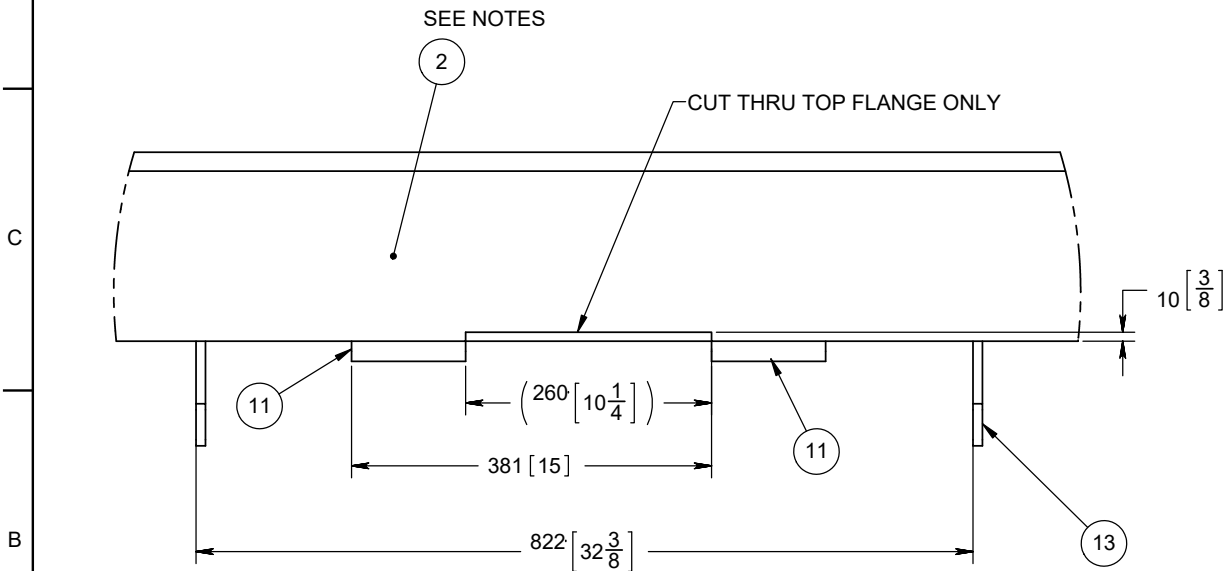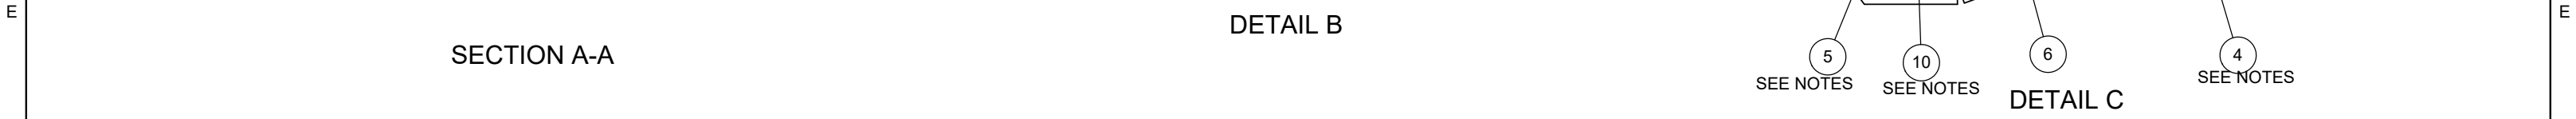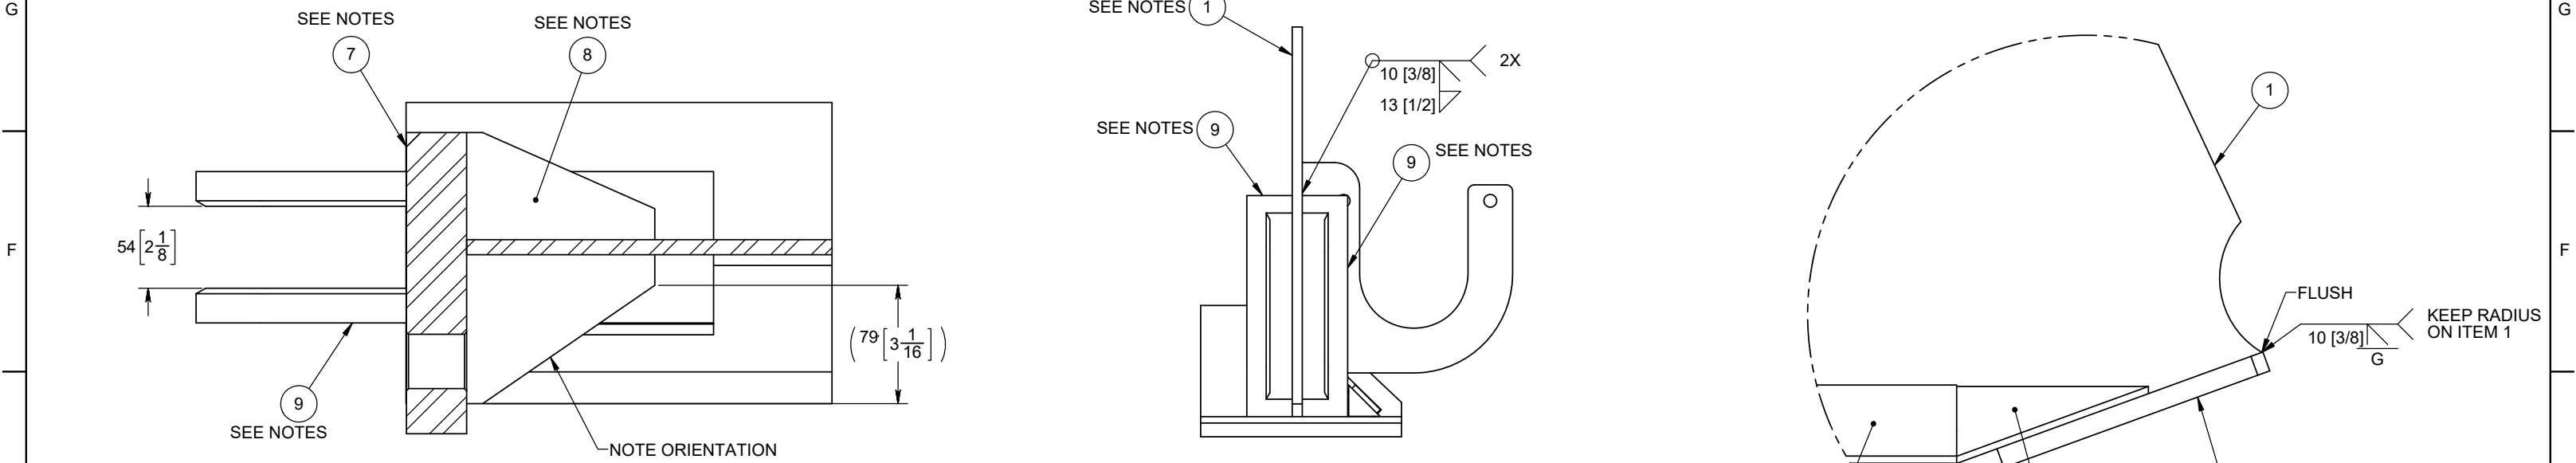

- NOTES:
- 4. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
 - 5. SEE MPI REQUIREMENTS- SHEET 3
 - 6. NOTES CONTINUED ON SHEET 3

UNLESS OTHERWISE SPECIFIED SEE SHEET 1 FOR DEFAULT TOLERANCES AND SPECIFICATIONS	THIRD ANGLE PROJECTION	
	DO NOT SCALE DRAWING	
	WELDMENT, CATWALK DS BEAM, R2D, PC4100	
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.		
SCALE 1:14 SHEET SIZE D	SHEET 2 OF 3	AY30009 REV A

