

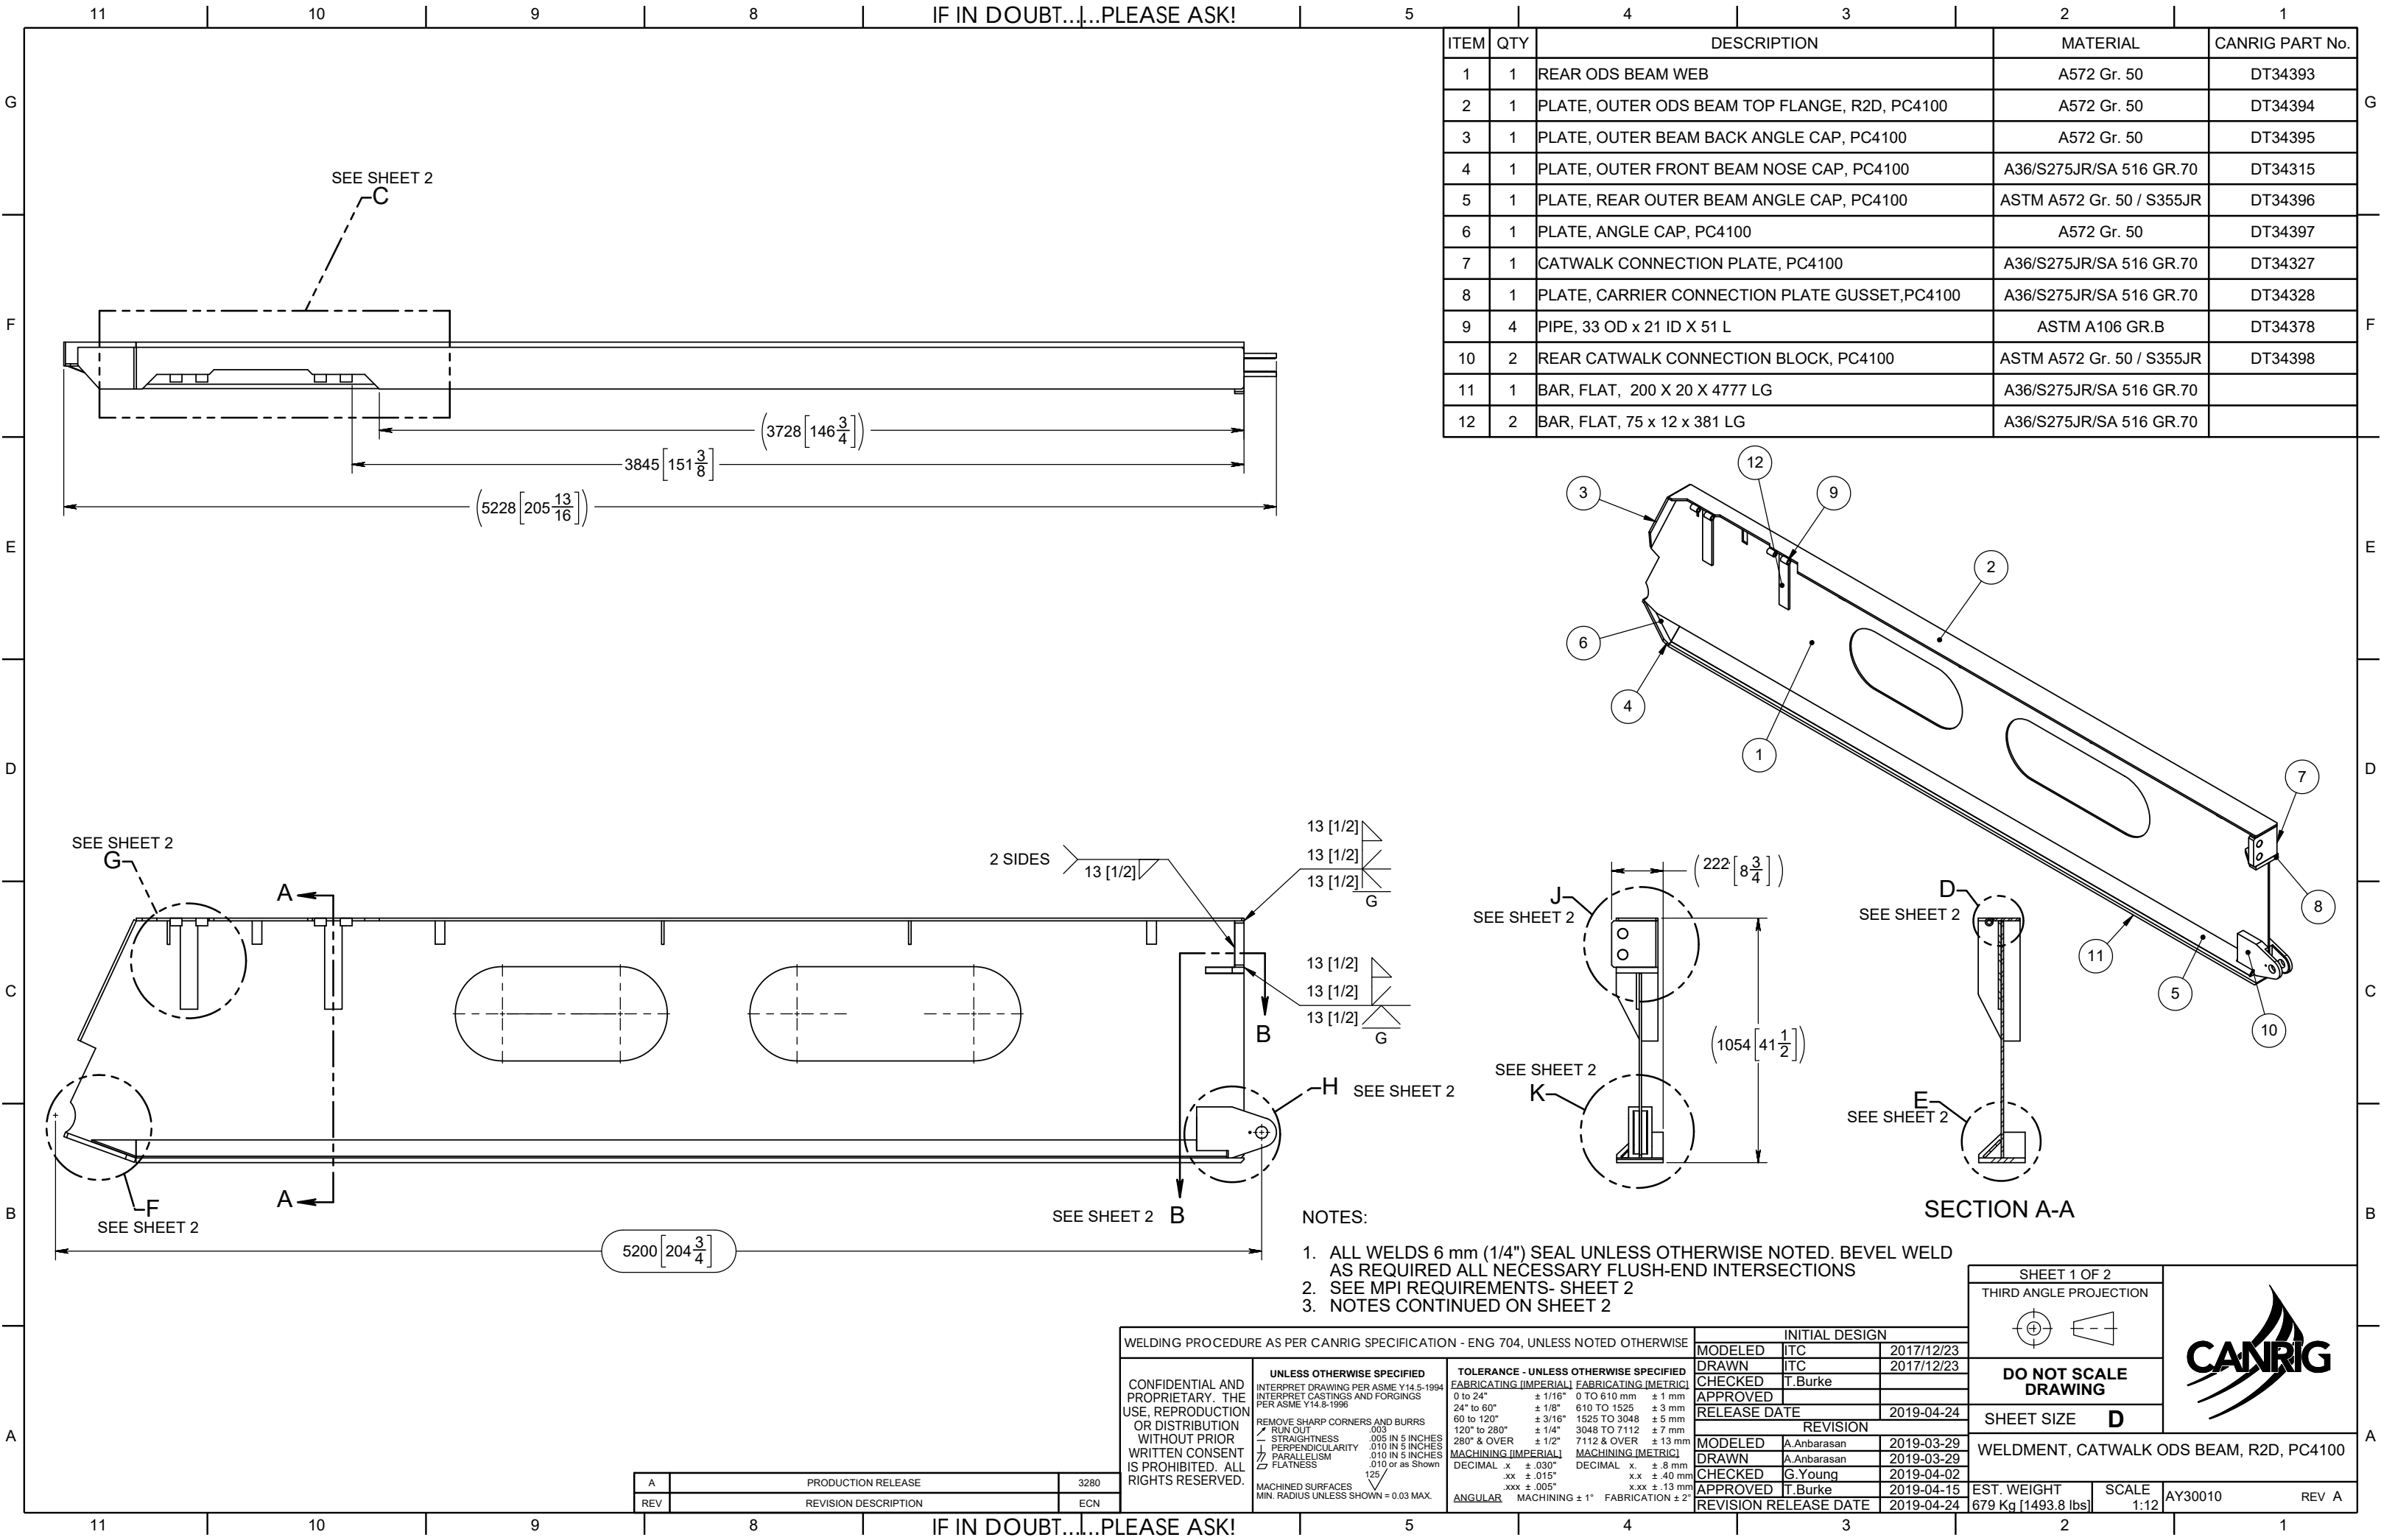
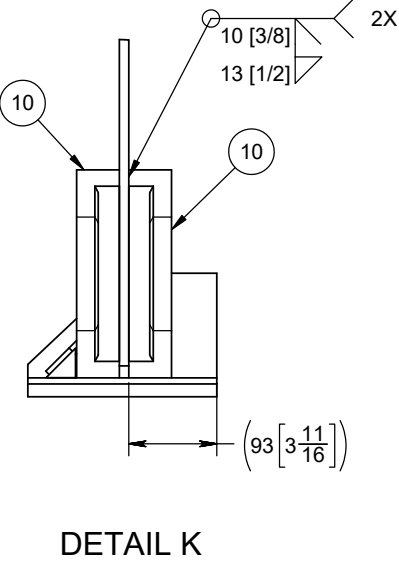
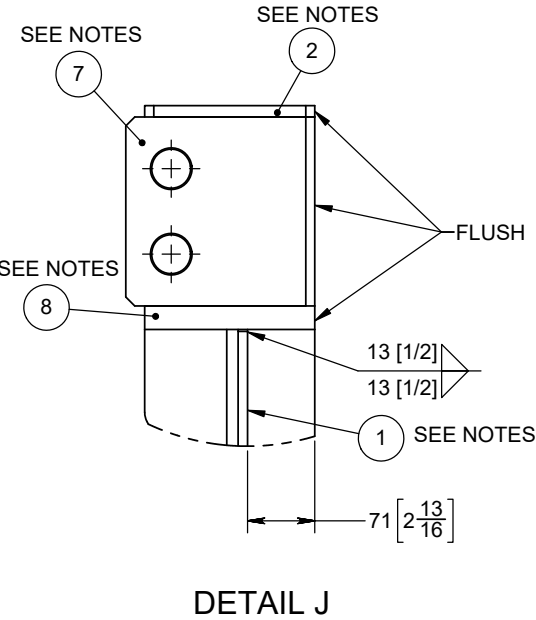
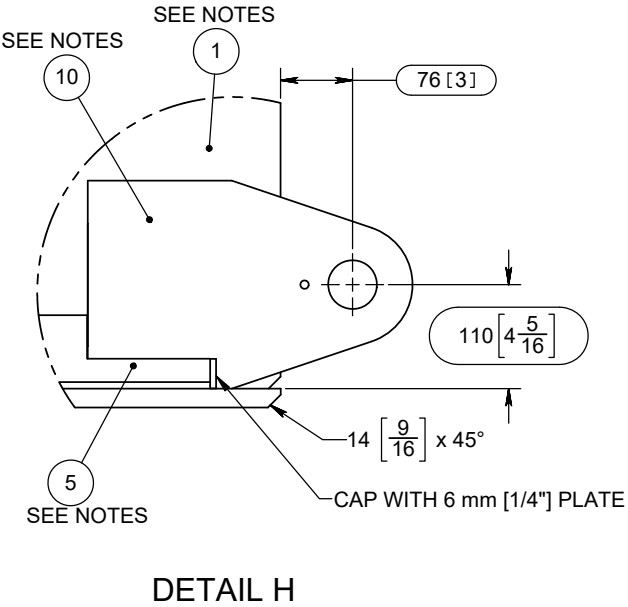
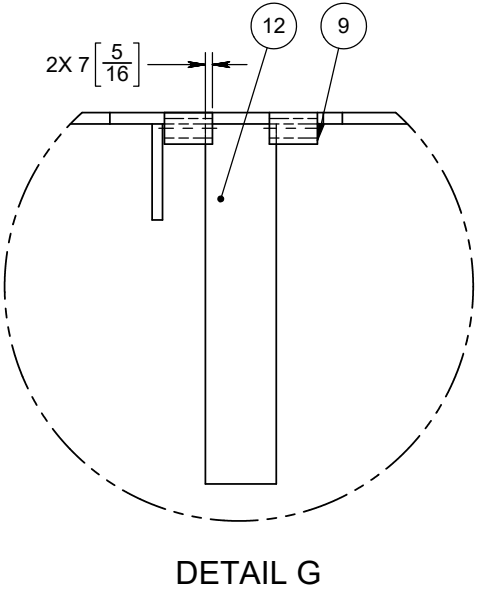
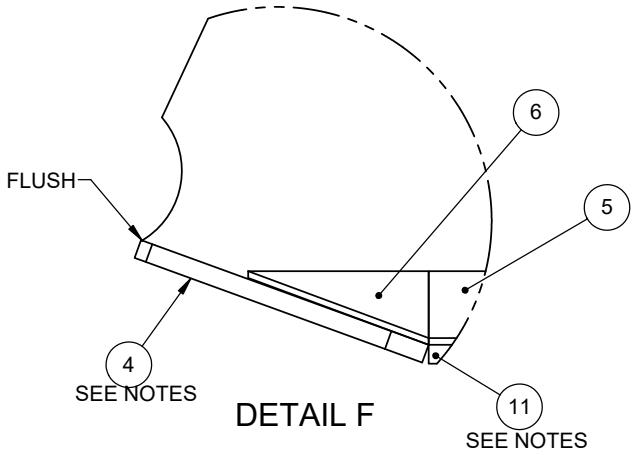
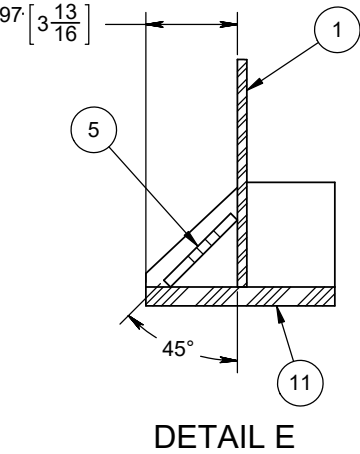
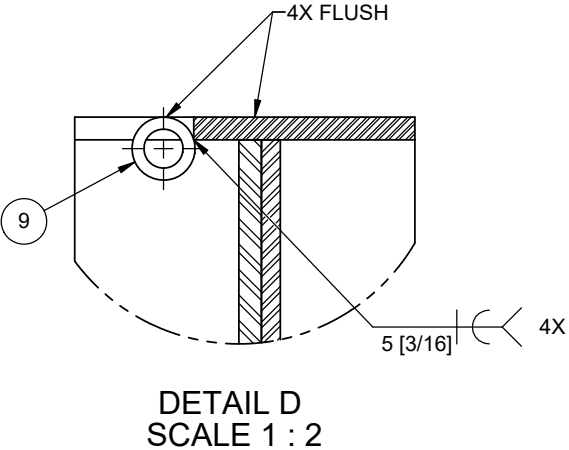


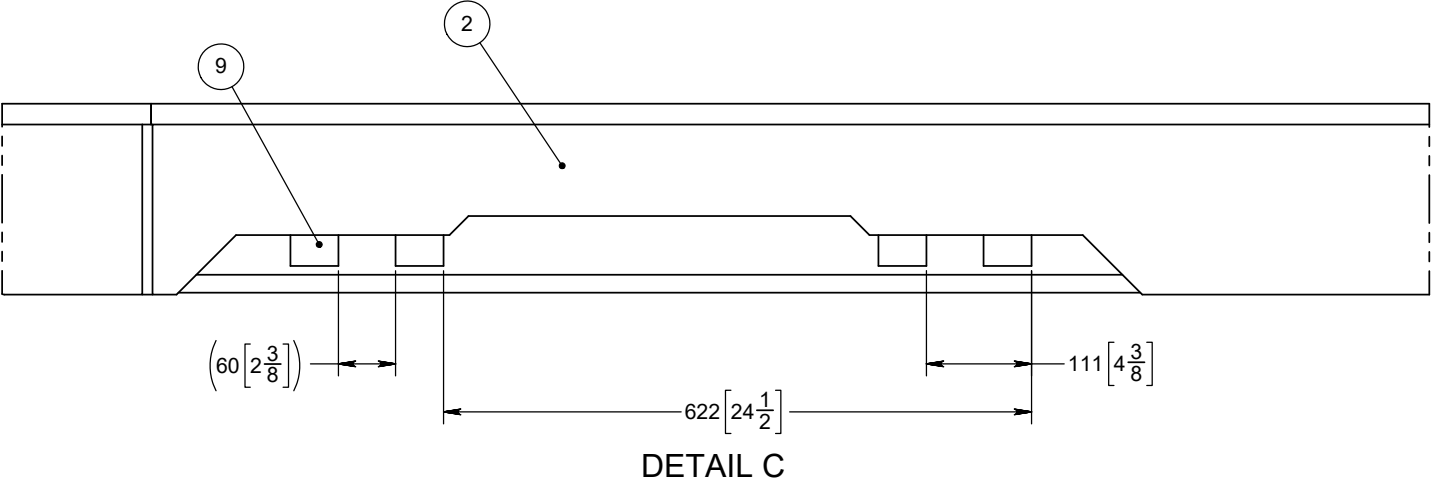

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	REAR ODS BEAM WEB	A572 Gr. 50	DT34393
2	1	PLATE, OUTER ODS BEAM TOP FLANGE, R2D, PC4100	A572 Gr. 50	DT34394
3	1	PLATE, OUTER BEAM BACK ANGLE CAP, PC4100	A572 Gr. 50	DT34395
4	1	PLATE, OUTER FRONT BEAM NOSE CAP, PC4100	A36/S275JR/SA 516 GR.70	DT34315
5	1	PLATE, REAR OUTER BEAM ANGLE CAP, PC4100	ASTM A572 Gr. 50 / S355JR	DT34396
6	1	PLATE, ANGLE CAP, PC4100	A572 Gr. 50	DT34397
7	1	CATWALK CONNECTION PLATE, PC4100	A36/S275JR/SA 516 GR.70	DT34327
8	1	PLATE, CARRIER CONNECTION PLATE GUSSET,PC4100	A36/S275JR/SA 516 GR.70	DT34328
9	4	PIPE, 33 OD x 21 ID X 51 L	ASTM A106 GR.B	DT34378
10	2	REAR CATWALK CONNECTION BLOCK, PC4100	ASTM A572 Gr. 50 / S355JR	DT34398
11	1	BAR, FLAT, 200 X 20 X 4777 LG	A36/S275JR/SA 516 GR.70	
12	2	BAR, FLAT, 75 x 12 x 381 LG	A36/S275JR/SA 516 GR.70	

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE			INITIAL DESIGN		
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.			MODELED	ITC	2017/12/23
			DRAWN	ITC	2017/12/23
			CHECKED	T.Burke	
			APPROVED		
UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-1994 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996 REMOVE SHARP CORNERS AND BURRS RUN OUT .003 STRAIGHTNESS .005 IN 5 INCHES PERPENDICULARITY .010 IN 5 INCHES PARALLELISM .010 IN 5 INCHES FLATNESS .010 or as Shown 125/ MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.			REVISION		
			MODELED	A.Anbarasan	2019-03-29
			DRAWN	A.Anbarasan	2019-03-29
			CHECKED	G.Young	2019-04-02
TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING [IMPERIAL] FABRICATING [METRIC] 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL x ± .030" DECIMAL x ± .8 mm .xx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°			APPROVED	T.Burke	2019-04-15
			REVISION RELEASE DATE	2019-04-24	
A			SHEET 1 OF 2		
REV			THIRD ANGLE PROJECTION		
PRODUCTION RELEASE			DO NOT SCALE DRAWING		
REVISION DESCRIPTION			SHEET SIZE D		
3280			WELDMENT, CATWALK ODS BEAM, R2D, PC4100		
ECN			EST. WEIGHT 679 Kg [1493.8 lbs]		
			SCALE 1:12		
			AY30010		
			REV A		

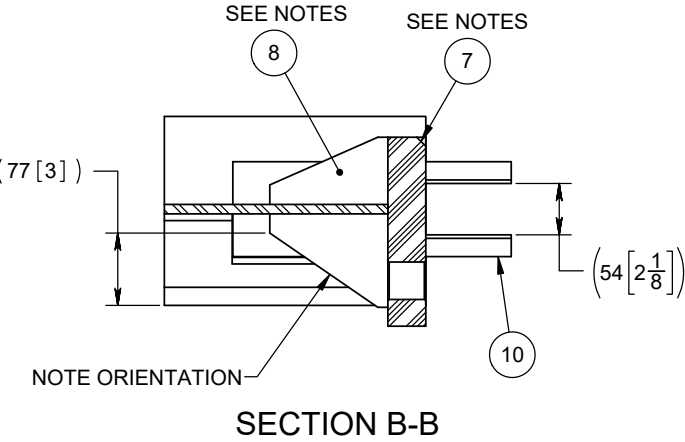

MPI INSPECTION CHART				
LINE #	DESCRIPTION	INSPECTION TYPE	% OF WELD INSPECTED	APPROVAL MARK
1	ALL WELDS JOINING ITEMS 7 & 2	MPI	100	
2	ALL WELDS JOINING ITEMS 7 & 8	MPI	100	
3	ALL WELDS JOINING ITEMS 7 & 1	MPI	100	
4	ALL WELDS JOINING ITEMS 10 & 1	MPI	100	
5	ALL WELDS JOINING ITEMS 10 & 5	MPI	100	
6	ALL WELDS JOINING ITEMS 8 & 1	MPI	100	
7	ALL WELDS JOINING ITEMS 4 & 11	MPI	100	

- NOTES:
4. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
 5. SEE MPI REQUIREMENTS

UNLESS OTHERWISE SPECIFIED SEE SHEET 1 FOR DEFAULT TOLERANCES AND SPECIFICATIONS	THIRD ANGLE PROJECTION		
	DO NOT SCALE DRAWING		
	WELDMENT, CATWALK ODS BEAM, R2D, PC4100		
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	SHEET 2 OF 2	AY30010	REV A
SCALE 1:4	SHEET SIZE D		